


LCMPD7R-JB/EMA : 7" LUMENPAD ROUND

LED DOWNLIGHT SURFACE MOUNT ACCESSORIES



- 120V/277V Operation
- Super Slim 1" thick design
- Die-cast aluminum frame
- WET LOCATION – For covered ceiling mount only
- 3-Year Warranty
- Silver, White or Black finish
- Emergency Backup Test Switch

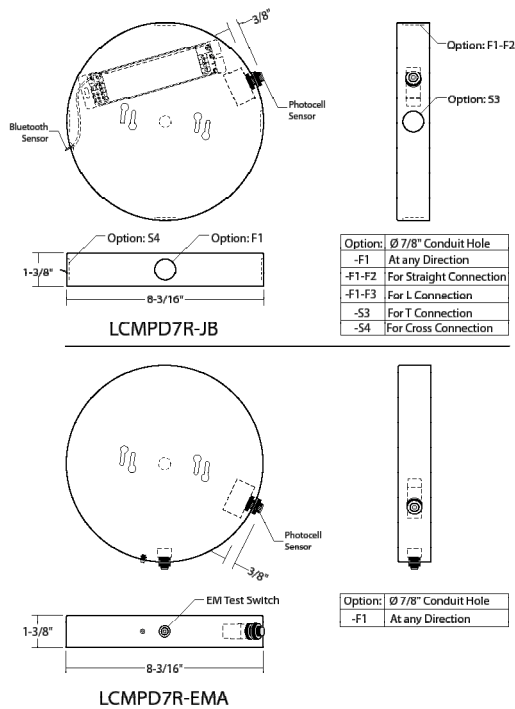

ORDERING : LCMPD7R-EMA-W-SDL

LCMPD7R											
Fixture		Accessory		Finish		Rating		Sensors		Knock Out Opening	
Accessory		Finish		Rating		Sensors		Knock Out Opening			
Junction Box	-JB ^{1,4}	White	-W ³	None	Blank	None	Blank	No Openings	Blank		
Emergency	-EMA ²	Silver	-S	Wet Location	-WL ⁵	120V Daylight/Photo Sensor	-SDL ^{1,2}	At any Direction	-F1 ^{1,2}		
Body, housing only	-EMA-BLANK ³	Black	-B			277V Daylight/Photo Sensor	-SDL1277 ^{1,2}	For Straight Connection	-F1-F2 ^{1,2}		
						3rd Party OEM Integration	-D ^{1,2,4}	For L Connection	-F1-F3		
								For T Connection	-S3 ^{1,2}		
								For Cross Connection	-S4 ¹		

¹ Option available for (LCMPD7R-JB) only.

² Option available for (LCMPD7R-EMA) only.

³ For Body only, white finish, specify (-EMA-BLANK).

⁴ 3rd party OEM integration with Avion, EnOcean, Lutron, ENLIGHTED etc. Consult factory for details.

⁵ (-WL) not available for (-EMA-S).

SPECIFICATION

Application

Die-cast architectural surface mount junction box (LCMPD7R-JB) for indoor locations only. 52 cubic-inch for a max of (18) #12 AWG wires. With up to (4) 7/8" holes for conduit fittings.

In the event of a power failure, the Surface Mounted LED Emergency Battery Backup (LCMPD7R-EMA) switches to the emergency mode and operates the existing fixture for 90 minutes. The unit contains a battery, charger, and a converter circuit in a single enclosure.

Die-cast aluminum body (LCMPD7R-EMA-BLANK) mounts to top of LCMPD7R to provide a cohesive look when mounted next to an LCMPD7R with LCMPDR-EMA Integral Emergency Battery Backup

Housing

Die-cast aluminum body mounts to top of LCMPD7R.

Emergency Backup

120-277VAC/60Hz, (14W). Switching time is less than 1-second. 24-hour charging time. 90-minute operating time

Temperature Rating - Maximum temperature 45°C. Minimum temperature, -20°C.

Finishes

High quality powder coat finish for maximum durability. Available in White (-W), Black (-B), or Silver (-S).

Sensors

Available options include 120V Daylight/Photo Sensor (-DSL), 277V Daylight/Photo Sensor (-DSL277), as well as 3rd Party OEM Integration (-D).

Certifications and Listings

ETL/cETL listed. Suitable for Wet Location Installations (Covered Ceiling Mount). Suitable for use in closets, compliant with NFPA® 70, NEC® Section 410.16 (A)(3) and 410.16 (C)(5).

Caution

Fixtures must be grounded in accordance with national, state and/or local electrical codes. Failure to do so may result in serious personal injury.

Warranty

Covered by a 3-Year Warranty to be free of defects in materials and craftsmanship. Recommended for applications where ambient temperatures do not exceed 35°C. installations exceeding this temperature will result in reduced LED lamp life and avoided warranty.