


LD533V024-1227-100-D10 - 100W 120V/277V 0-10V DIMMING DRIVER (24V DC) LINKALED PUCK

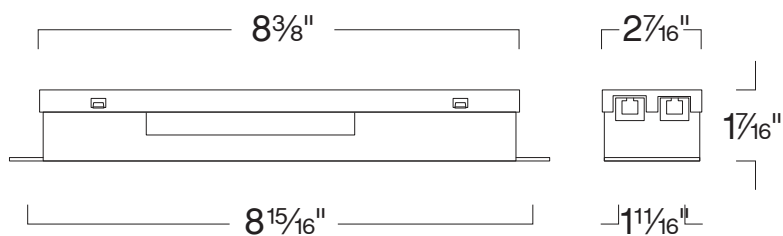

SPECIFICATION

24V 100W LED

Features:

- Isolated output power per NEC and UL Safety Requirements
- Dimmable with standard 0-10V Dimmers and Dimming Systems
- Remote Mounting up to 18 feet away at full load with 18AWG Wiring
- Surge Protection of 2KV

Electrical:

- Input Voltage:** 120VAC-277VAC 50/60 HZ
- Input Current:** 100W Version: 0.98A at 120V / 0.42A at 277V
- Efficiency:** 85% Min
- Allowable Temperature:** -10F to 130F
- Power Factor:** >95%
- THD Max:** 10%
- All Wires:** Min. 6" Length (Exposed)
- IP RATING:** IP66 Dry Location Only
- Label:** UL Recognized

COMPATIBILITY

 LULEDBP PROFESSIONAL GRADE LED STICK	 LUTKLED24V1 24V 12" STRIP	 LK136SLED LINKALED PUCK LIGHT (SURFACE MOUNTED)
 LULEDB LINKALED BAR	 LK136LED LINKALED PUCK LIGHT (RECESSED)	 LULEDBW WET LOCATION LED BAR
LD5V24-24-PI 24V/24W PLUGIN DRIVER		

Note: Wattage limitations on compatible items must be met.

Benefit:

- Dimmable with 0-10V Dimmers
- Runs cooler than Magnetic Drivers
- Works in Non-Dimming Applications as well