


6" Remodel Architectural Housing (1-Lamp) w/ Self-Flanged Reflector

LFH6 SERIES - 6" HORIZONTAL CFL RECESSED LIGHTING

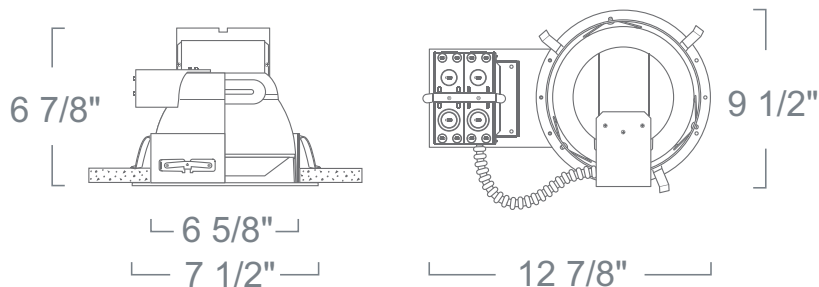

SPECIFICATION

Ceiling cut-out: 6 3/4"

Application: Architectural-grade recessed downlight housing for low to medium height ceilings and commercial installations. A variety of trims, compatible styles and finishes are available to achieve the proper décor and illumination.

Housing Frame: 16 gauge galvanized plaster ring with powder coat finish, six friction clips secure trim to housing for ceiling up to 1". Pre-installed torsion remodeling clips for secure installation on existing ceiling.

Mounting: Housing suitable for existing or new construction installations, supplied with 4 high tension remodeling clips, designed to secure the housing to an existing sheetrock ceiling up to 1" thick for fast and easy installation from below the ceiling line.

Ballast: Electronic Class P 60Hz Ballast with Inherent thermal protection. For Double Twin Tube (DTT) or Triple Twin Tube Lamps (TTT). Sound A rated. Micro-Processor controlled. Min. starting temperature -10°C. Accessible from above or below the ceiling. Contact factory for detailed technical information on ballast specifications. Note: For dimming applications must use compatible dimmer switch. Consult specific ballast manufacturer for up-to-date compatibility list.

Socket Cap: Heavy-Duty steel socket enclosure with built-in ventilations. Die-cast aluminum fittings. Accepts compatible reflector trims.

Socket: Thermo-plastic socket UL Listed rated for high temperature and provides nickel plated contacts. Accepts 4-Pin lamps with electronic ballast selection.

Junction Box: 16 gauge pre-wired galvanized steel double Junction Box, 64 cubic-inch for a maximum of (8) #12 AWG wires. Furnished with (10) 3/4", (2) 1" and (8) Romex knock-outs. Strain clamps to install or remove covers for easy access and ground wire. Equipped with safety standard die-cast aluminum fitting for flex-conduit.

Insulation Contact: Non-IC rated housing must be kept 3" from insulation.

Safety Labels: UL/CUL listed for through-branch wiring (8) No.12 AWG 90°C and suitable for damp locations. NYC approved: Calendar #41937.

Emergency Option: Emergency back-up operates one lamp for a minimum of 90 minutes at 750 Lumens in case of power outage. Unit is remotely mounted. It includes battery, charger, and test switch with indicator light. Consult Factory for 1300 Lumen Package.

FEATURE:



Application: Architectural-grade recessed downlight reflector for medium to high ceilings in commercial and architectural installations. Reflector designed for minimal glare from lamp without sacrificing lumen output.


Construction: One piece self-flanged design enables a clean trim finish, without the need for a secondary trim ring. Heavy-gauge aluminum reflector prevents ugly dents during shipping and installation. Iridescent-free reflective coating minimizes unsightly rainbow effect.

Mounting: Pre-punched key holes allow mounting of socket cap assembly for housing, with vertically adjustable socket cap. Reflector held in place with 6 steel pressure springs mounted on housing frame.

Warranty: Covered by a 3 Year Warranty to be free of defects in materials and craftsmanship.

Label: UL Listed, cETL Listed

Assembled in USA

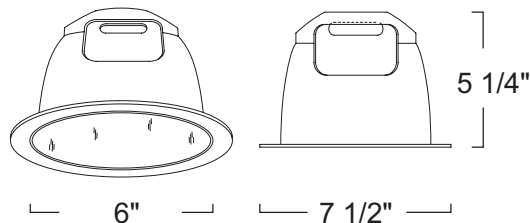

6" REMODEL ARCHITECTURAL HOUSING

LFH6R CFL (1)42W/(2)26W Max

WATTAGE	BALLAST	OPTIONS
LFH6R113 : (1) 13W	UE : 120V/277V Electronic	Blank : None
LFH6R113-126 : 13W-26W*	UD : 0-10V Dimming (120V/277V)	-EM : Emergency (Remote)
LFH6R118 : (1) 18W	ADV-SM : 120V/277V Smart Mate	-EMA : Emergency (Trim)
LFH6R126 : (1) 26W	ADV-M7 : 120V/277V Mark VII Dimming	-FS : Fuse
LFH6R132 : (1) 32W	ADV-M10 : 120V Mark X Dimming**	
LFH6R142 : (1) 42W	ADV-M10-27 : 277V Mark X Dimming***	
	LUT-HL : 120V Lutron 3-Wire Dimming	
	LUT-TW : 120V Tu-wire Dimming	
	LUT-HL-27 : 277V Lutron 3-Wire Dimming	
	UE-347 : 347V Electronic	
	E : 120V Electronic	

* Only available for UE.
** Not available for 13W option.
*** 18W only

SELF-FLANGED REFLECTOR

LR661 CFL (2) 26W DTT, (1) 42W TTT

Ordering example: LFH6R132LUT-TW-EM/LR661SSF-EMA

REFLECTOR / FLANGE FINISH	OPTION
LR661CCF : Clear Reflector/Clear Flange	Blank : None
LR661CNF : Clear Reflector/Natural Flange	-EMA : Integral EM Switch
LR661CWF : Clear Reflector/White Flange	
LR661SNF : Satin Reflector / Natural Flange	
LR661SSF : Satin Reflector/Satin Haze Flange	
LR661SWF : Satin Reflector/White Flange	
LR661WWF : White Reflector/White Flange	

6" Clear Specular HighZak Reflector

Lamp: (2)CF26DD/E/841

Total Rated Lamp Lumens : 3600

Total Luminaire Efficiency : 43.7%

CIE Type: Direct

Spacing Ratio: 1.50

Report File # LLI070307E.IES

By: Light Laboratory, Inc.

LM-63-2002

LUMINANCE DATA

6" Horizontal Housing : LFH6226UE

6" HighZak Reflector : LR661CCF

32W Applications : LR651CCF

HOUSING		WATT.	LUMEN*	
1-LAMP	2-LAMP		1-LAMP	2-LAMP
LFH6113	LFH6213	13W	900	1800
LFH6118	LFH6218	18W	1200	2400
LFH6126UE	LFH6226UE	26W	1800	3600
LFH6132UE		32W	2400	

* Lumens may vary upon lamp types/manufacturers.

PROJECT INFORMATION

TYPE :

VOLTAGE :

PROJECT :


ITEM # :

DATE :

CANDLE POWER DISTRIBUTION

DEGREES
VERTICAL AVERAGE

0	605
1	602
3	610
5	615
7	628
9	643
11	666
13	691
15	715
17	731
19.5	738
22.5	726
25.5	703
29	672
33	625
37.5	581
42.5	526
47.5	450
55	203
65	9
75	4
85	3
90	0

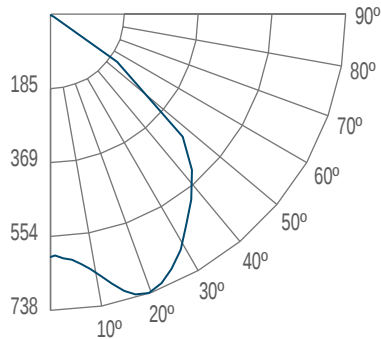

LUMINANCE

Angle in Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	37798	37798	37798
55	19384	19384	19384
65	1166	1166	1166
75	846	846	846
85	1885	1885	1885

MULTIPLIERS**


FINISHES		WATTAGES	
Gold	0.90	13W	0.50
White	0.95	18W	0.66
Black	0.70	32W	1.33
Satin Haze	0.80	42W	1.78
Copper	0.75		

** Based on Clear reflector (26W).

INITIAL FOOTCANDLES

(Beam angle : 106°)

Footcandles at center	Circle Diameter	Footcandles at edge
151.3	5.3	15.1
37.8	10.6	3.8
16.8	15.9	1.7
9.5	21.2	0.9
6.1	26.5	0.6
4.2	31.8	0.4
3.1	37.2	0.3
2.4	42.5	0.2
1.9	47.8	0.2
1.5	53.1	0.2

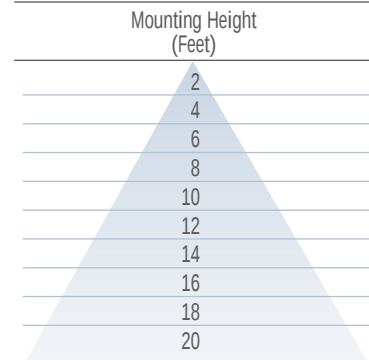

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Effective Floor Cavity Reflectance 0.20

RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
0	52	52	52	52	51	51	51	51	49	49	49	47	47	47	45	45	45	44			
1	49	47	45	44	47	46	45	43	44	43	42	43	42	41	41	40	40	39			
2	45	42	40	37	44	41	39	37	40	38	36	38	37	35	37	36	35	34			
3	41	38	35	32	40	37	34	32	36	33	31	35	32	31	33	32	30	29			
4	38	34	30	28	37	33	30	28	32	29	27	31	29	27	30	28	27	26			
5	35	30	27	24	35	30	27	24	29	26	24	28	26	24	27	25	23	23			
6	33	27	24	21	32	27	24	21	26	23	21	26	23	21	25	23	21	20			
7	30	25	21	19	30	25	21	19	24	21	19	23	21	19	23	20	19	18			
8	28	23	19	17	28	23	19	17	22	19	17	21	19	17	21	19	17	16			
9	27	21	18	15	26	21	18	15	20	17	15	20	17	15	19	17	15	14			
10	25	19	16	14	24	19	16	14	19	16	14	18	16	14	18	15	14	13			

ZONAL LUMEN SUMMARY

ZONE	LUMENS	%LAMP	%FIXT
0 - 30	550.85	15.30	35.00
0 - 40	869.02	24.10	55.20
0 - 60	1462.46	40.60	92.90
0 - 90	1574.29	43.70	100.00
90 -120	0.00	0.00	0.00
90 -130	0.00	0.00	0.00
90 -150	0.00	0.00	0.00
90 -180	0.00	0.00	0.00
0 -180	1574.29	43.70	100.00