


6" Remodel Architectural Housing (1-Lamp) w/ Self-Flanged Lensed Wall Wash

LFH6 SERIES - 6" HORIZONTAL CFL RECESSED LIGHTING

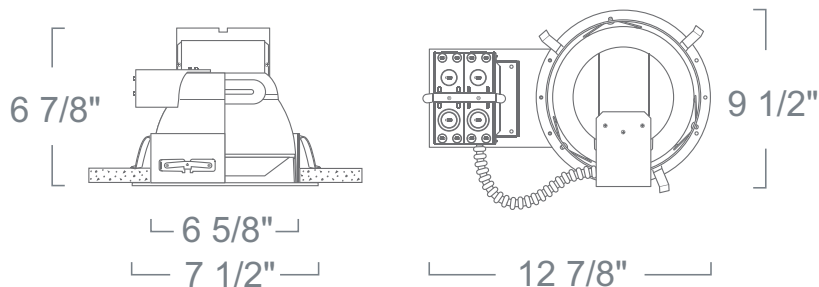

SPECIFICATION

Ceiling cut-out: 6 3/4"

Application: Architectural-grade recessed downlight housing for low to medium height ceilings and commercial installations. A variety of trims, compatible styles and finishes are available to achieve the proper décor and illumination.

Housing Frame: 16 gauge galvanized plaster ring with powder coat finish, six friction clips secure trim to housing for ceiling up to 1". Pre-installed torsion remodeling clips for secure installation on existing ceiling.

Mounting: Housing suitable for existing or new construction installations, supplied with 4 high tension remodeling clips, designed to secure the housing to an existing sheetrock ceiling up to 1" thick for fast and easy installation from below the ceiling line.

Ballast: Electronic Class P 60Hz Ballast with Inherent thermal protection. For Double Twin Tube (DTT) or Triple Twin Tube Lamps (TTT). Sound A rated. Micro-Processor controlled. Min. starting temperature -10°C. Accessible from above or below the ceiling. Contact factory for detailed technical information on ballast specifications. Note: For dimming applications must use compatible dimmer switch. Consult specific ballast manufacturer for up-to-date compatibility list.

Socket Cap: Heavy-Duty steel socket enclosure with built-in ventilations. Die-cast aluminum fittings. Accepts compatible reflector trims.

Socket: Thermo-plastic socket UL Listed rated for high temperature and provides nickel plated contacts. Accepts 4-Pin lamps with electronic ballast selection.

Junction Box: 16 gauge pre-wired galvanized steel double Junction Box, 64 cubic-inch for a maximum of (8) #12 AWG wires. Furnished with (10) 3/4", (2) 1" and (8) Romex knock-outs. Strain clamps to install or remove covers for easy access and ground wire. Equipped with safety standard die-cast aluminum fitting for flex-conduit.

Insulation Contact: Non-IC rated housing must be kept 3" from insulation.

Safety Labels: UL/CUL listed for through-branch wiring (8) No.12 AWG 90°C and suitable for damp locations. NYC approved: Calendar #41937.

Emergency Option: Emergency back-up operates one lamp for a minimum of 90 minutes at 750 Lumens in case of power outage. Unit is remotely mounted. It includes battery, charger, and test switch with indicator light. Consult Factory for 1300 Lumen Package.

FEATURE:




Application: Architectural-grade recessed downlight reflector for low to medium height ceilings for commercial and architectural installations. A variety of trims, compatible styles and finishes are available to achieve the proper décor and illumination. Reflector designed for minimal glare from lamp without sacrificing lumen output. Provides wall wash illumination along the vertical surface for lighting signage or to emphasize wall textures. Proper illumination of walls enhances the mood in a room and gives a more spacious feel.

Construction: One piece self-flanged design enables a clean trim finish, without the need for a secondary trim ring. Heavy-gauge aluminum reflector prevents ugly dents during shipping and installation. Iridescent-free reflective coating minimizes unsightly rainbow effect.

Mounting: Pre-punched key holes allow mounting of socket cap assembly for housing, with vertically adjustable socket cap. Reflector held in place with 6 steel pressure springs mounted on housing frame.

Warranty: Covered by a 3 Year Warranty to be free of defects in materials and craftsmanship.

Label: UL Listed, cETL Listed

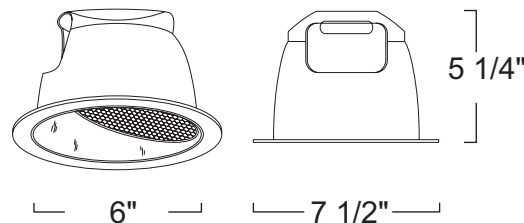

6" REMODEL ARCHITECTURAL HOUSING

LFH6R CFL (1)42W/(2)26W Max

WATTAGE	BALLAST	OPTIONS
LFH6R113 : (1) 13W	UE :120V/277V Electronic	Blank :None
LFH6R113-126 :13W-26W*	UD :0-10V Dimming (120V/277V)	-EM :Emergency (Remote)
LFH6R118 : (1) 18W	ADV-SM :120V/277V Smart Mate	-EMA :Emergency (Trim)
LFH6R126 : (1) 26W	ADV-M7 :120V/277V Mark VII Dimming	-FS :Fuse
LFH6R132 : (1) 32W	ADV-M10 :120V Mark X Dimming**	
LFH6R142 : (1) 42W	ADV-M10-27 :277V Mark X Dimming***	
	LUT-HL :120V Lutron 3-Wire Dimming	
	LUT-TW :120V Tu-wire Dimming	
	LUT-HL-27 :277V Lutron 3-Wire Dimming	
	UE-347 :347V Electronic	
	E :120V Electronic	

SELF-FLANGED LENSED WALL WASH

LR669 CFL (2) 26W TTT, (1) 26W DTT

Ordering example: LFH6R132LUT-TW-EM/LR669CNF

REFLECTOR/ FLANGE FINISH
LR669CNF :Clear Reflector/ Natural Flange
LR669CWF :Clear Finish/ White Flange
LR669WWF :White Reflector/ White Flange

* Only available for UE.
** Not available for 13W option.
*** 18W only

6" Wall Wash with Prismatic Lens

Lamp: (2)CFL26DD/E/830

Total Rated Lamp Lumens : 3650

Total Luminaire Efficiency : 42.3%

CIE Type: Direct

Spacing Ratio: 1.32

Report File # LLI090309G.IES

By: Light Laboratory, Inc.

LM-63-2002

LUMINANCE DATA

6" Horizontal Housing : LWH6226UE

6" Wall Wash with Lens : LR669C

32W Applications : LR659C

HOUSING		WATT.	LUMEN*	
1-LAMP	2-LAMP		1-LAMP	2-LAMP
LWH6113	LWH6213	13W	900	1800
LWH6118	LWH6218	18W	1200	2400
LWH6126UE	LWH6226UE	26W	1800	3600
LWH6132UE		32W	2400	

* Lumens may vary upon lamp types/manufacturers.

PROJECT INFORMATION

TYPE :

VOLTAGE :

PROJECT :

ITEM# :

DATE :

FIXTURE SPACING [Center Displacement]		2' DISTANCE FROM WALL			3' DISTANCE FROM WALL			4' DISTANCE FROM WALL		
										
DISTANCE FROM CEILING	1'	14 12 14	11 7 11	8 4 8	3 3 3	2 2 2	2 1 2	1 1 1	1 1 1	1 1 1
	2'	35 34 35	25 22 25	20 13 20	10 10 10	8 6 8	7 4 7	3 3 3	3 2 3	3 2 3
	3'	33 35 33	24 23 24	18 14 18	15 15 15	11 11 11	10 8 10	7 7 7	6 5 6	5 4 5
	4'	26 26 26	17 18 17	13 13 13	16 16 16	12 12 12	10 9 10	9 9 9	7 7 7	6 5 6
	5'	19 19 19	13 13 13	10 10 10	14 14 14	11 11 11	9 9 9	9 9 9	8 7 8	7 5 7
	6'	14 13 14	10 10 10	7 8 7	12 12 12	9 9 9	7 7 7	9 9 9	7 7 7	6 6 6
	7'	10 10 10	7 7 7	6 6 6	9 9 9	7 7 7	6 6 6	8 8 8	6 6 6	5 5 5
	8'	7 7 7	6 6 6	4 4 4	7 8 7	6 6 6	5 5 5	7 7 7	5 5 5	4 5 4
	9'	6 6 6	4 4 4	3 4 3	6 6 6	5 5 5	4 4 4	6 6 6	5 5 5	4 4 4
	10'	4 4 4	3 4 3	3 3 3	5 5 5	4 4 4	3 3 3	5 5 5	4 4 4	3 3 3
	11'	3 3 3	3 3 3	2 2 2	4 4 4	3 3 3	3 3 3	4 4 4	3 3 3	3 3 3