
## New Construction (IC) w/ Micro Gimbal Die-Cast

## LH1299 SERIES - 2" LOW VOLTAGE RECESSED LIGHTING



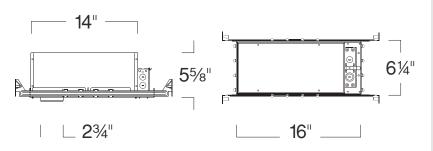

## **SPECIFICATION**

Ceiling cut-out: 2 3/4"

**Gasket:** Supplied with gasket to prevent light leakage and unsightly heat streaks on ceiling surface.

**Application:** General purpose recessed downlight housing for low to medium height ceilings for residential and light commercial applications. A variety of trims, compatible styles and finishes are available to achieve the desired décor and illumination.

**Lens Inclusion:** Clear glass protective safety lens included in packaging.

**Housing:** Pre-wired .05'' baked enamel 1-piece drawn steel housing adjusts up to 3/4'' ceiling thickness. Integral thermal protector to guard against improper lamping and installation. Trim is secured with torsion wing springs.

**Mounting:** Steel pressure springs mounted on trim to ensure positive retention inside housing.

**Transformer:** Class 2 Noise-Free Electronic transformer installed adjacent to Junction Box, bottom and top accessible. Dimmable with dimmers designed for Electronic Low Voltage Loads. Thermally protected rated for 90° C.

Adjustability Lamp can be titled 45° degrees vertically.

**Socket:** 2-pin porcelain socket with aluminum heat sink plate. Lamp clips to trim to ensure proper and consistent positioning.

Accessories: Takes (1) 1 3/8" Media.

**Insulation Contact:** IC rated housing rated for direct contact with low to medium density loosefill blown and rolled insulation. For use with high density loosefill blown insulation, reduce rated lamp wattage accordingly (roughly %15-%20).

Label: cETL Listed


FEATURE:

**Safety Labels:** ETL/CETL listed for through-branch wiring (8) No.12 AWG 90°C and suitable for damp locations. NYC approved: Calendar #41937.

Label: cETL Listed



1 1/4"



NEW CONSTRUCTION (IC) LH1299IC 12V Out 37W Max MR11/MR16

LH1299ICA :37W Airtight IC

OPTION 12V OUT 37W MAX MRT 17MR

MICRO GIMBAL DIE-CAST LR1266 12V 35W Max MR11

FINISH
LR1266W :All White
LR1266B :All Black
LR1266N :All Natural
LR1266CO :All Copper
LR1266MO :All Mocha

Ordering example: LH1299ICA/LR1266W

ID#: 1140\_115

File Located online www.liton.com/spec