


New Construction (IC) w/ MR16 Baffle

LH1299 SERIES - 2" LOW VOLTAGE RECESSED LIGHTING



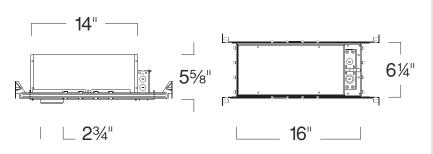

SPECIFICATION

Ceiling cut-out: 2 3/4"

TYPE

CATALOG#

Application: Perfect solution for low-profile design in hard-tolight spaces.

Application: General purpose recessed downlight housing for low to medium height ceilings for residential and light commercial applications. A variety of trims, compatible styles and finishes are available to achieve the desired décor and illumination.

Gasket: Supplied with gasket to prevent light leakage and unsightly heat streaks on ceiling surface.

Housing: Pre-wired .05'' baked enamel 1-piece drawn steel housing adjusts up to 3/4'' ceiling thickness. Integral thermal protector to guard against improper lamping and installation. Trim is secured with torsion wing springs.

Lens Inclusion: Clear glass protective safety lens included in packaging.

Transformer: Class 2 Noise-Free Electronic transformer installed adjacent to Junction Box, bottom and top accessible. Dimmable with dimmers designed for Electronic Low Voltage Loads. Thermally protected rated for 90° C.

Mounting: Steel pressure springs mounted on trim to ensure positive retention inside housing.

Socket: 2-pin porcelain socket with aluminum heat sink plate. Lamp clips to trim to ensure proper and consistent positioning.


Accessories: Takes up to (3) 2" Media.

Insulation Contact: IC rated housing rated for direct contact with low to medium density loosefill blown and rolled insulation. For use with high density loosefill blown insulation, reduce rated lamp wattage accordingly (roughly %15-%20). Label: cETL Listed

FEATURE:

Safety Labels: ETL/CETL listed for through-branch wiring (8) No.12 AWG 90°C and suitable for damp locations. NYC approved: Calendar #41937.

Label: cETL Listed



NEW CONSTRUCTION (IC) LH1299IC 12V Out 37W Max MR11/MR16

OPTION LH1299ICA :37W Airtight IC

MR16 BAFFLE LR1293 12V/120V 50W MR16

FINISH LR1293W :All White Blank : Damp Location LR1293N :All Natural Metal -WL :Wet Location LR1293CO : All Copper

Ordering example: LH1299ICA/LR1293CO-WL

