


IC Double Wall Housing w/ Pull Down LH1399 SERIES - 3" LOW VOLTAGE RECESSED LIGHTING

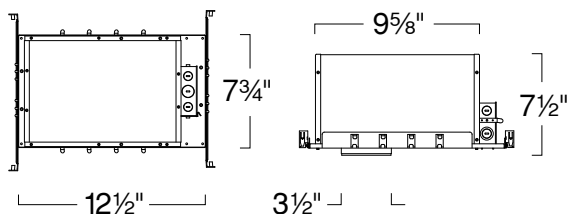

SPECIFICATION

Ceiling cut-out: 3 7/8"

Application: General purpose recessed downlight housing for low to medium height ceilings for residential and light commercial applications. A variety of trims, compatible styles and finishes are available to achieve the desired décor and illumination.

Housing: Pre-wired housing adjusts up to a 1 1/4" ceiling thickness. Integral thermal protector to guard against improper lamping and installation. Trim is secured with torsion wing springs.

Mounting: Housing suitable for new construction installations only, supplied with (2) 24" adjustable hanger bars with 90 degrees repositioning ability. Hanger bars equipped with nail-less install 3/4" serrated barbed studs and with captive nails, for faster and easier secure mounting in wood joists. Set-screws lock into position and prevent shifting after installation. Earthquake structural cable compatible for drop panel ceiling or any other mounting that requires direct support from structural ceilings.

Socket: 2-pin porcelain socket with aluminum heat sink plate. Lamp clips to trim to ensure proper and consistent positioning.

Junction Box: 16 gauge pre-wired galvanized steel Junction Box, 25 cubic-inch for a maximum of (8) #12 AWG wires. Furnished with (5) 3/4", (1) 1" and (4) Romex knock-outs. Strain clamps to install or remove covers for easy access and ground wire. Equipped with safety standard fitting for flex-conduit.

Insulation Contact: IC rated housing rated for direct contact with low to medium density loosefill blown and rolled insulation. For use with high density loosefill blown insulation, reduce rated lamp wattage accordingly (roughly %15-%20).

Airflow: Airtight option is designed to restrict air flow from room into plenums in compliance to the WSEC - Washington State Energy Code, (Less than 2.0 CFM -Cubic Feet per Minute). Complies to Title24 air flow requirements (Air-tight).

Safety Labels: UL/CUL listed for through-branch wiring (8) No.12 AWG 90°C and suitable for damp locations. NYC approved: Calendar #41937.

Label: cETL Listed

FEATURE:



Application: Provides flexibility and versatility by doubling as both a downlight and as an accent light. This trim has a larger degree of rotation resulting in both visual style and practical ergonomics.

Gasket: Supplied with gasket to prevent light leakage and unsightly heat streaks on ceiling surface.


Lens Inclusion: Clear glass protective safety lens included in packaging.

Mounting: Steel pressure springs mounted on trim to ensure positive retention inside housing.

Adjustability Lamp can be tilted 85° degrees vertically and rotated 358° degrees horizontally.

Accessories: Takes (1) 1 3/4" Media.

Label: UL Listed, cETL Listed

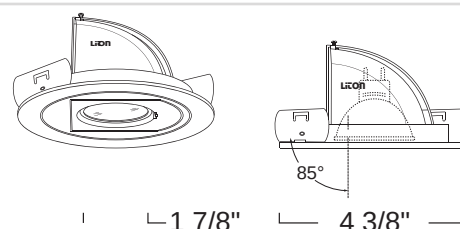

IC DOUBLE WALL HOUSING LH1399IC 12V Out 50W Max MR16

RATING	WATTAGE	VOLTAGE
LH1399ICA :IC-Airtight	Blank :50W	Blank :120V/12V
LH1399ICAE :Airtight Electronic		-27 :277V/12V

PULL DOWN LR1367 12V 50W Max MR16


RING FINISH
LR1367W :White
LR1367B :Black
LR1367N :Natural
LR1367CO :Copper
LR1367MO :Mocha

Ordering example: LH1399ICA/LR1367CO

Type :

Project :

Catalog # :

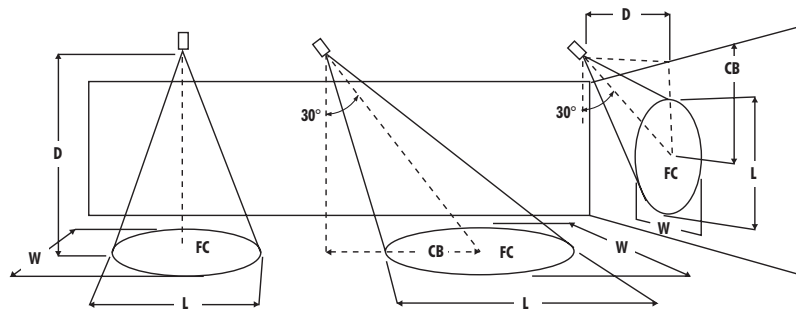

D : Distance to the horizontal or vertical surface.
 FC : Initial foot candles at the center of the beam.
 L : Length of the beam where candle power is reduced to 50% of center beam candle power.
 W : Width of the beam where candle power is reduced to 50% of center beam candle power.
 CB : Distance to the center of the beam.

Lamp data given is typical and is based on bare lamp performance. Contact lamp manufacturers for availability and specific performance. Distance, length, and width given in decimal feet.

MR16 12V Halogen 2-Pin GX5.3



MR16 12V Halogen 24 in. GX5.3



	0° Aiming Angle					30° Aiming Angle					30° Aiming Angle					45° Aiming Angle						
	Horizontal Foot candles				CB	Horizontal Foot candles				CB	Vertical Foot candles				CB	Vertical Foot candles				CB		
	D	FC	L	W		D	FC	L	W		D	FC	L	W		D	FC	L	W			
Q20 MR16 / C / VN5P7	6	215	0.7	0.7		6	140	0.8	0.7	3.5		2	243	0.9	0.5	3.5		3	304	0.7	0.4	3.0
Beam Spread = 7°	8	121	0.9	0.9		8	79	1.1	1.0	4.6		3	108	1.3	0.7	5.2		4	171	0.9	0.8	4.0
CBCP = 7,400	10	77	1.1	1.1		10	50	1.2	1.2	5.8		4	61	1.8	0.9	6.9		5	110	1.2	1.0	5.0
Rated Life = 3,000 Hrs.	12	54	1.0	1.0		12	35	1.4	1.4	6.9		5	39	2.2	1.2	8.7		6	76	1.4	1.2	6.0
Q20 MR16 / C / NSP15	4	237	0.9	0.9		4	154	1.2	1.1	2.3		1.5	263	1.1	0.6	2.6		4	374	0.8	0.6	2.0
Beam Spread = 15°	6	106	1.4	1.4		6	69	1.8	1.6	3.5		2.0	148	1.4	0.8	3.5		6	166	0.9	0.9	3.0
CBCP = 3,750	8	59	1.8	1.8		8	39	2.4	2.2	4.6		2.5	95	1.8	0.9	4.3		8	94	1.2	1.2	4.0
Rated Life = 5,000 Hrs.	10	38	2.3	2.3		10	25	3.0	2.7	5.8		3.0	66	2.1	1.1	5.2		10	60	1.5	1.5	5.0
Q20 MR16 / C / FL40	1.5	222	1.0	1.0		1.5	163	1.1	1.1	0.9		1.0	135	0.9	0.9	1.7		1.0	254	0.8	1.0	1.0
Beam Spread = 40°	2.0	125	1.3	1.3		2.0	92	1.4	1.4	1.2		1.5	60	1.4	1.3	2.6		1.5	113	1.1	1.5	1.0
CBCP = 525	2.5	80	1.6	1.6		2.5	59	1.8	1.8	1.4		2.0	34	1.8	1.8	3.5		2.0	63	1.5	2.0	2.0
Rated Life = 5,000 Hrs.	3.0	56	2.0	2.0		3.0	41	2.1	2.1	1.7		2.5	22	2.3	2.3	4.3		2.5	41	1.9	2.5	2.5
Q35 MR16 / C / SP20	3	356	1.0	1.0		3	231	1.3	1.1	1.7		1.5	223	1.4	0.9	2.6		2	305	1.2	0.9	2.0
Beam Spread = 20°	4	200	1.3	1.3		4	130	1.7	1.5	2.3		2.0	126	1.9	1.1	3.5		3	136	1.7	1.3	3.0
CBCP = 3,200	5	128	1.6	1.6		5	83	2.1	1.9	2.9		2.5	80	2.4	1.4	4.3		4	76	2.3	1.8	4.0
Rated Life = 5,000 Hrs.	6	89	1.9	1.9		6	58	2.6	2.2	3.5		3.0	56	2.8	1.7	5.2		5	49	2.9	2.2	5.0
Q35 MR16 / C / FL40	2	262	1.2	1.2		2	204	1.3	1.2	1.2		1.0	253	0.9	0.8	1.7		1.5	235	1.2	1.0	1.5
Beam Spread = 40°	3	116	1.8	1.8		3	91	2.0	1.8	1.7		1.5	112	1.4	1.2	2.6		2.0	132	1.5	1.3	2.0
CBCP = 1,000	4	65	2.3	2.3		4	51	2.6	2.4	2.3		2.0	63	1.8	1.7	3.5		2.5	85	1.9	1.7	2.5
Rated Life = 5,000 Hrs.	5	42	2.9	2.9		5	33	3.3	3.0	2.9		2.5	40	2.3	2.1	4.3		3.0	59	2.3	2.0	3.0
Q42 MR16 / C / VN5P9	6	347	0.8	0.8		6	226	1.0	0.9	3.5		2	415	1.0	0.6	3.5		4	276	1.1	0.7	4.0
Beam Spread = 9°	8	195	1.0	1.0		8	127	1.4	1.2	4.6		3	185	1.5	0.8	5.2		5	177	1.4	0.9	5.0
CBCP = 12,500	10	125	1.3	1.3		10	81	1.7	1.4	5.8		4	104	2.0	1.1	6.9		6	123	1.7	1.1	6.0
Rated Life = 3,500 Hrs.	12	87	1.5	1.5		12	56	2.1	1.7	6.9		5	66	2.6	1.4	8.7		7	90	2.0	1.3	7.0
Q50 MR16 / C / NSP15	6	264	1.5	1.5		6	171	1.9	1.7	3.5		2	361	1.5	1.5	3.5		4	229	1.7	1.2	4.0
Beam Spread = 15°	8	148	1.9	1.9		8	96	2.5	2.2	4.6		3	160	2.3	2.3	5.2		5	147	2.1	1.6	5.0
CBCP = 9,500	10	95	2.4	2.4		10	62	3.1	2.8	5.8		4	90	3.0	3.0	6.9		6	102	2.5	1.9	6.0
Rated Life = 6,000 Hrs.	12	66	2.9	2.9		12	43	3.7	3.3	6.9		5	58	3.8	3.8	8.7		7	75	3.0	2.2	7.0
Q50 MR16 / C / NFL25	3	322	1.2	1.2		3	212	1.6	1.4	1.7		1.5	220	1.7	1.1	2.6		2	282	1.4	1.1	2.0
Beam Spread = 25°	4	181	1.7	1.7		4	119	2.1	1.9	2.3		2.0	124	2.2	1.4	3.5		3	125	2.2	1.7	3.0
CBCP = 3,000	5	116	2.1	2.1		5	76	2.7	2.4	2.9		2.5	79	2.8	1.8	4.3		4	70	2.9	2.3	4.0
Rated Life = 6,000 Hrs.	6	81	2.5	2.5		6	53	3.2	2.9	3.5		3.0	55	3.3	2.2	5.2		5	45	3.6	2.8	5.0
Q50 MR16 / C / FL40	3	213	2.0	2.0		3	181	2.1	2.0	1.7		1.5	259	1.1	1.3	2.6		2	274	1.3	1.5	2.0
Beam Spread = 40°	4	120	2.7	2.7		4	102	2.8	2.7	2.3		2.0	146	1.5	1.7	3.5		3	122	2.0	2.3	3.0
CBCP = 1,700	5	77	3.4	3.4		5	65	3.5	3.4	2.9		2.5	93	1.9	2.2	4.3		4	68	2.6	3.0	4.0
Rated Life = 6,000 Hrs.	6	53	4.0	4.0		6	45	4.2	4.1	3.5		3.0	65	2.3	2.6	5.2		5	44	3.3	3.8	5.0
Q71 MR16 / C / NSP15	6	306	1.6	1.8		6	198	2.0	1.8	3.5		3	194	2.3	1.3	5.2		4	276	1.8	1.3	4.0
Beam Spread = 15°	8	172	2.2	2.4		8	112	2.6	2.4	4.6		4	109	3.1	1.8	6.9		6	123	2.7	1.9	6.0
CBCP = 11,000	10	110	2.7	3.0		10	71	3.3	3.0	5.8		5	70	3.9	2.2	8.7		8	69	3.6	2.6	8.0
Rated Life = 4,000 Hrs.	12	76	3.2	3.6		12	50	3.9	3.6	6.9		6	48	4.7	2.7	10.4		10	44	4.5	3.2	10.0
Q71 MR16 / C / NFL25	4	309	1.7	1.7		4	223	2.1	1.9	2.3		2	257	1.7	1.3	3.5		3	256	1.9	1.5	3.0
Beam Spread = 25°	6	137	2.5	2.5		6	99	3.1	2.8	3.5		3	114	2.5	1.9	5.2		4	144	2.6	2.1	4.0
CBCP = 4,950	8	77	3.4	3.4		8	56	4.1	3.7	4.6		4	64	3.4	2.6	6.9		5	92	3.2	2.6	5.0
Rated Life = 7,000 Hrs.	10	49	4.2	4.2		10	36	5.2	4.6	5.8		5	41	4.2	3.2	8.7		6	64	3.9	3.1	6.0
Q71 MR16 / C / FL40	3	236	2.1	2.1		3	200	2.2	2.1	1.7		1.5	286	1.2	1.3	2.6		2	301	1.4	1.5	2.0
Beam Spread = 40°	4	133	2.8	2.8		4	112	2.9	2.8	2.3		2.0	161	1.6	1.8	3.5		3	134	2.2	2.3	3.0
CBCP = 2,000	5	85	3.4	3.4		5	72	3.6	3.5	2.9		2.5	103	2.0	2.2	4.3		4	75	2.9	3.1	4.0
Rated Life = 4,000 Hrs.	6	59	4.1	4.1		6	50	4.4	4.2	3.5		3.0	71	2.5	2.6	5.2		5	48	3.6	3.8	5.0