


## IC Double Wall Housing w/ Baffle Wall Wash LH1399 SERIES - 3" LOW VOLTAGE RECESSED LIGHTING

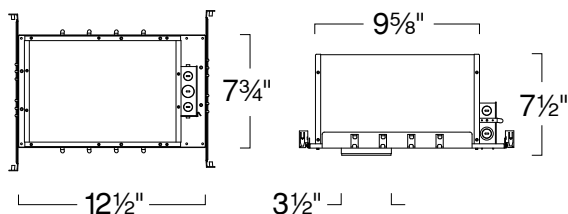

### SPECIFICATION

Ceiling cut-out: 3 7/8"

**Application:** General purpose recessed downlight housing for low to medium height ceilings for residential and light commercial applications. A variety of trims, compatible styles and finishes are available to achieve the desired décor and illumination.

**Housing:** Pre-wired housing adjusts up to a 1 1/4" ceiling thickness. Integral thermal protector to guard against improper lamping and installation. Trim is secured with torsion wing springs.

**Mounting:** Housing suitable for new construction installations only, supplied with (2) 24" adjustable hanger bars with 90 degrees repositioning ability. Hanger bars equipped with nail-less install 3/4" serrated barbed studs and with captive nails, for faster and easier secure mounting in wood joists. Set-screws lock into position and prevent shifting after installation. Earthquake structural cable compatible for drop panel ceiling or any other mounting that requires direct support from structural ceilings.

**Socket:** 2-pin porcelain socket with aluminum heat sink plate. Lamp clips to trim to ensure proper and consistent positioning.

**Junction Box:** 16 gauge pre-wired galvanized steel Junction Box, 25 cubic-inch for a maximum of (8) #12 AWG wires. Furnished with (5) 3/4", (1) 1" and (4) Romex knock-outs. Strain clamps to install or remove covers for easy access and ground wire. Equipped with safety standard fitting for flex-conduit.

**Insulation Contact:** IC rated housing rated for direct contact with low to medium density loosefill blown and rolled insulation. For use with high density loosefill blown insulation, reduce rated lamp wattage accordingly (roughly %15-%20).

**Airflow:** Airtight option is designed to restrict air flow from room into plenums in compliance to the WSEC - Washington State Energy Code, (Less than 2.0 CFM -Cubic Feet per Minute). Complies to Title24 air flow requirements (Air-tight).

**Safety Labels:** UL/CUL listed for through-branch wiring (8) No.12 AWG 90°C and suitable for damp locations. NYC approved: Calendar #41937.

**Label:** cETL Listed

### FEATURE:



**Application:** Provides the accent lighting from ceiling to floor on a vertical surface without creating light scallops. In addition, the wall wash trim highlights the textures of the wall and provide specific illumination for various types of artwork.

**Gasket:** Supplied with gasket to prevent light leakage and unsightly heat streaks on ceiling surface.

**Lens Inclusion:** Clear glass protective safety lens included in packaging.


**Mounting:** Steel pressure springs mounted on trim to ensure positive retention inside housing.

**Adjustability** Lamp can be tilted 30° degrees vertically.

**Accessories:** Takes (1) 2" Media.

**Label:** UL Listed, cETL Listed

**Limitation:** Not for use w/Shallow Housings.

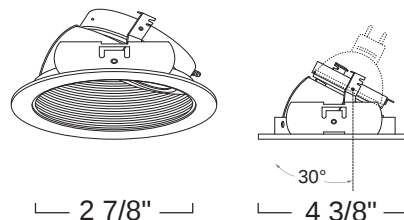

### IC DOUBLE WALL HOUSING LH1399IC 12V Out 50W Max MR16

| RATING                          | WATTAGE    | VOLTAGE         |
|---------------------------------|------------|-----------------|
| LH1399ICA :IC-Airtight          | Blank :50W | Blank :120V/12V |
| LH1399ICAE :Airtight Electronic | -27        | :277V/12V       |

### BAFFLE WALL WASH LR1373 12V 50W Max MR16

| BAFFLE FINISH        |
|----------------------|
| LR1373B :Black       |
| LR1373BB :All Black  |
| LR1373N :All Natural |
| LR1373CO :All Copper |

\* Comes standard with a matching ring finish. Use "W" for White Ring.

Ordering example: LH1399ICA/LR1373BB