


IC Double Wall Housing w/ Pinhole w/ Phenolic Baffle

LH1499 SERIES - 4" LOW VOLTAGE RECESSED LIGHTING

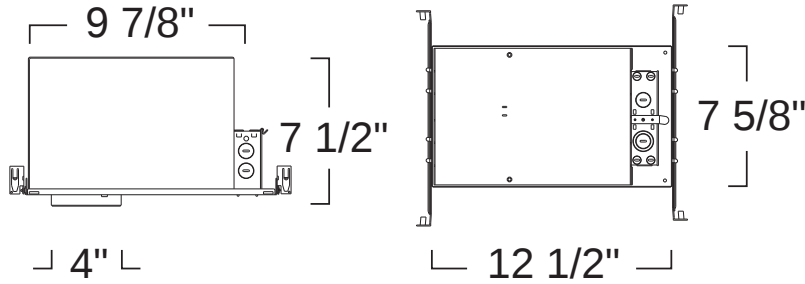

SPECIFICATION

Ceiling cut-out: 4 1/2"

Application: General purpose recessed downlight housing for low to medium height ceilings for residential and light commercial applications. A variety of trims, compatible styles and finishes are available to achieve the desired décor and illumination.

Housing: Pre-wired housing adjusts up to a 1 1/4" ceiling thickness. Integral thermal protector to guard against improper lamping and installation. Trim is secured with torsion wing springs.

Mounting: Housing suitable for new construction installations only, supplied with (2) 24" adjustable hanger bars with 90 degrees repositioning ability. Hanger bars equipped with nail-less install 3/4" serrated barbed studs and with captive nails, for faster and easier secure mounting in wood joists. Set-screws lock into position and prevent shifting after installation. Earthquake structural cable compatible for drop panel ceiling or any other mounting that requires direct support from structural ceilings.

Transformer: High quality insulated transformer installed adjacent to Junction Box, bottom and top accessible. Thermally protected rated for 90° C. Available in magnetic or "noise-free" electronic.

Socket: 2-pin porcelain socket with aluminum heat sink plate. Lamp clips to trim to ensure proper and consistent positioning.

Junction Box : 16 gauge pre-wired galvanized steel Junction Box, 32 cubic-inch for a maximum of (8) #12 AWG wires. Furnished with (7) 3/4" and (4) Romex knock-outs. Strain clamps to install or remove covers for easy access and ground wire. Equipped with safety standard fitting for flex-conduit.

Insulation Contact: IC rated housing rated for direct contact with low to medium density loosefill blown and rolled insulation. For use with high density loosefill blown insulation, reduce rated lamp wattage accordingly (roughly %15-%20).

Airflow: Airtight option is designed to restrict air flow from room into plenums in compliance to the WSEC - Washington State Energy Code, (Less than 2.0 CFM -Cubic Feet per Minute). Complies to Title24 air flow requirements (Air-tight).

Safety Labels: UL listed. NYC approved: Calendar #41937.

Label: UL Listed, cETL Listed

FEATURE:



Application: These narrow aperture beams allow a defined location to be lit without affecting the surrounding surfaces while concealing the lamp image and providing a consistent ceiling appearance. The smaller the aperture the more confined the illumination.

Pinhole trims provide the type of precise illumination needed for artwork such as paintings and statues. They are also ideal for cozy environments like restaurants and living spaces where glare-free illumination is desired. Aside from accent lighting, they can also be utilized for task lighting applications such as above tables, workspace, cabinetry, and other locations where a directed beam is desired.


Gasket: Supplied with gasket to prevent light leakage and unsightly heat streaks on ceiling surface.

Lens Inclusion: Clear glass protective safety lens included in packaging.

Mounting: Steel pressure springs mounted on trim to ensure positive retention inside housing.

Accessories: Takes (1) 2" Media.

Label: UL Listed, cETL Listed

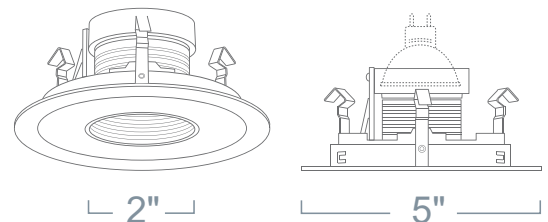

IC DOUBLE WALL HOUSING

LH1499IC 12V Out 50W Max MR16

RATING	WATTAGE	VOLTAGE
LH1499ICASC :Airtight IC	-E :50W Electronic	Blank :120V/12V
	Blank :50W Magnetic	-27 :277V/12V (Electronic*)

* Available with 120V/277V Magnetic Option, consult factory

PINHOLE W/ PHENOLIC BAFFLE

LR1419 12V/120V/HID 75W Max MR16

FINISH	LISTING
LR1419WD :White Baffle/ White Ring	Blank :Damp
LR1419BB :All Black	-WL :Wet Location
LR1419MO :All Mocha	
LR1419BD :Black Baffle/White Ring	

Ordering example: LH1499ICASC/LR1419WD