


IC Airtight w/ Fire Barrier LH33P - 3" COMPACT FLUORESCENT DOWNLIGHT

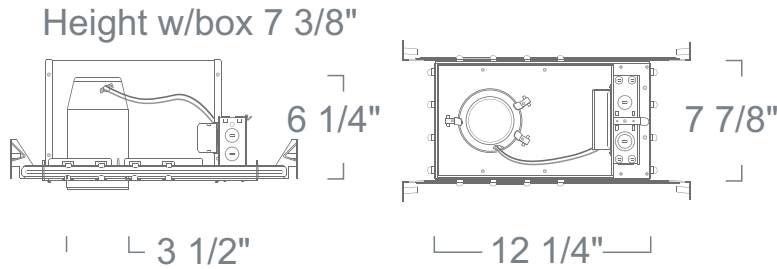

SPECIFICATION

Ceiling cut-out: 3 7/8"

Application: General purpose recessed downlight housing for low to medium height ceilings for residential and light commercial applications. A variety of trims, compatible styles and finishes are available to achieve the desired décor and illumination.

Housing: Pre-wired housing adjusts up to a 1 1/4" ceiling thickness. Integral thermal protector to guard against improper lamping and installation. Trim is secured with torsion wing springs.

Mounting: Housing suitable for new construction installations only, supplied with (2) 24" adjustable hanger bars with 90 degrees repositioning ability. Hanger bars equipped with nail-less install 3/4" serrated barbed studs and with captive nails, for faster and easier secure mounting in wood joists. Set-screws lock into position and prevent shifting after installation. Earthquake structural cable compatible for drop panel ceiling or any other mounting that requires direct support from structural ceilings.

Socket: Thermo-plastic socket UL Listed rated for high temperature and provides nickel plated contacts. Accepts 4-Pin lamps with electronic ballast selection.

Junction Box : 16 gauge pre-wired galvanized steel Junction Box, 32 cubic-inch for a maximum of (8) #12 AWG wires. Furnished with (7) 3/4" and (4) Romex knock-outs. Strain clamps to install or remove covers for easy access and ground wire. Equipped with safety standard fitting for flex-conduit.

Insulation Contact: Non IC rated housing must be kept 3" from insulation. IC rated housing rated for direct contact with low to medium density loosefill blown and rolled insulation. For use with high density loose fill blown insulation, reduce rated lamp wattage accordingly (roughly %15-%20).

Airflow: Airtight option is designed to restrict air flow from room into plenums in compliance to the WSEC - Washington State Energy Code, (Less than 2.0 CFM -Cubic Feet per Minute). Complies to Title24 air flow requirements (Air-tight).

Safety Labels: UL/CUL listed for through-branch wiring (8) No.12 AWG 90°C and suitable for damp locations. NYC approved: Calendar #41937.

Emergency Option: Emergency back-up operates one lamp for a minimum of 90 minutes at 750 Lumens in case of power outage. Unit is remotely mounted. It includes battery, charger, and test switch with indicator light. Consult Factory for 1300 Lumen Package.

Label: cETL Listed

FEATURE:



This galvanized welded steel enclosure is rated (able) for one-hour resistance to active fire. **LFB2012** enclosure is designed for use with both existing and new installation of Recessed Luminaires. Fulfills the required 1-hour-fire-resistance-rating, to operate as an active fire wall, with less effort.

FEATURES

- 24GA Galvanized welded steel constructed body
- 4 flanges with 3/16" nail/screw openings
- 16"/24" (apart) joist/stud applicable
- (6)1/2" knockouts provided for wire access
- UL/NFPA/ASTM evaluated; ETL certified.

INSTALLATION

The **LFB2012** requires a minimum of 9 1/2" Steel Stud or Wood Joist, and must be spaced either 16" or 24" apart. The Luminaire affixes to the interior of the Fire Barrier, **LFB2012** using self-tapping screws.

OPERATION

Liton's **LFB2012** acts as a physical barrier to stop the progress of an active fire. This one-hour minimum rating enclosure meets that of a typical 3/8" drywall barrier.

This unit eliminates the requirement to specify more costly fire rated luminaires and labor, such as, hand constructed drywall enclosures. Which normally are not consistent of uniform in their construction, as well as their ability to maintain the fire stop.

STANDARD APPROVALS

- ASTM-E119-00a
- UL263
- UBC 7-1
- NFPA 251
- ASI A2.1

Label: cETL Listed

Assembled in USA

IC AIRTIGHT

LH33PICA CFL 13W DTT, 26W max TTT

WATTAGES	OPTION
LH33PICA :13W Electronic (No Box)	Blank :None
LH33PICA -18:18W Electronic	-EM :Emergency
LH33PICA -26:26W Electronic	-UD :0-10V Dimming (120V/277V)

FIRE BARRIER

LFB2012

INSIDE DEMENSIONS
LFB2012 :19 3/8" X 12" X 9 1/2"

Ordering example: LH33PICA-E18/LFB2012