
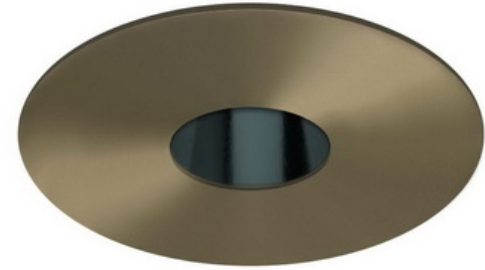


Remodel Housing w/ Pinhole w/ Reflector

LH3 SERIES - 3" LINE VOLTAGE RECESSED LIGHTING (GU10)

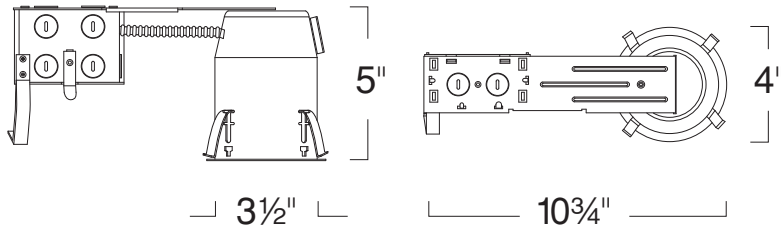

SPECIFICATION

Ceiling cut-out: 3 3/4"

Application: General purpose recessed downlight housing for low to medium height ceilings for residential and light commercial applications. A variety of trims, compatible styles and finishes are available to achieve the desired décor and illumination.

Housing: Pre-wired housing adjusts up to 1 1/4" ceiling thickness. This housing has torsion remodeling clips for secure installation. Integral thermal protector to guard against improper lamping and installation. Trim is secured with torsion wing springs/standard coil springs. Designed to be installed in existing sheet rock ceilings via ceiling cut out (above ceiling access is not required).

Mounting: Housing suitable for existing or new construction installations, supplied with high tension remodeling clips, designed to secure the housing to an existing sheetrock ceiling for fast and easy installation.

Socket: Standard porcelain GU10 "Twist & Lock" socket with high temperature leads.

Junction Box: 16 gauge pre-wired aluminum Junction Box, suitable for through branch wiring for a maximum of (4) #12 AWG wires. Furnished with (2) 3/4" knock-outs. Screw-in or out covers for easy access and ground wire. Equipped with safety standard fitting for flex-conduit.

Insulation Contact: Non-IC rated housing must be kept 3" from insulation.

Airflow: Airtight option is designed to restrict air flow from room into plenums in compliance to the WSEC - Washington State Energy Code, (Less than 2.0 CFM -Cubic Feet per Minute). Complies to Title24 air flow requirements (Air-tight).

Safety Labels: ETL/CETL listed for through-branch wiring (8) No.12 AWG 90°C and suitable for damp locations. NYC approved: Calendar #41937.

Label: cETL Listed

FEATURE:



Application: Provides the type of precision illumination needed for artwork such as paintings and statues. All of the wall wash trims will provide the desired accent illumination without interfering with the environment's general lighting.

Gasket: Supplied with gasket to prevent light leakage and unsightly heat streaks on ceiling surface.


Lens Inclusion: Clear glass protective safety lens included in packaging.

Mounting: Steel pressure springs mounted on trim to ensure positive retention inside housing.

Accessories: Takes up to (2) 2" Media.

Label: UL Listed, cETL Listed

Limitation: Not for use w/Shallow Housings.

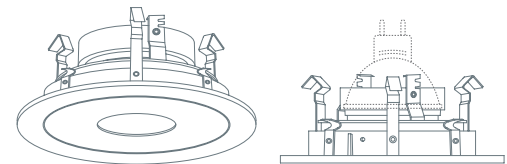

REMODEL HOUSING

LH3RA-GU10 120V 50W Max MR16 GU10

WATTAGE	VOLTAGE
LH3RA-GU10 :50W	Blank :120V

PINHOLE W/ REFLECTOR

LR1319 12V/120V 50W MR16

FINISH
LR1319BB :All Black
LR1319BMO :Black w/ Mocha Ring
LR1319CN :Clear w/ Natural Ring
LR1319CO :All Copper
LR1319CW :Clear w/ White Ring
LR1319MO :All Mocha
LR1319N :All Natural
LR1319WW :All White

Ordering example: LH3RA-GU10/LR1319CN