


5" Bracket Mounted GU24 Housing w/ Self Flanged Reflector 5" CFL (GU24)

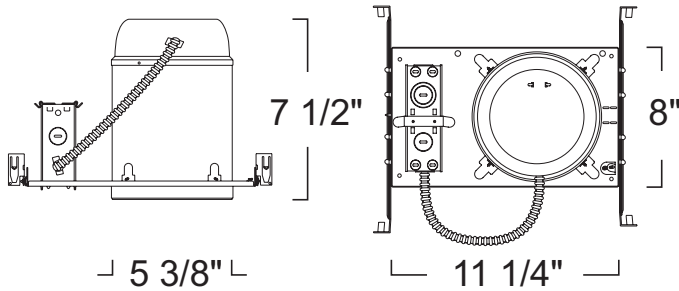

SPECIFICATION

Ceiling cut-out: 5 3/4"

Application: General purpose recessed downlight housing for medium to high ceilings for residential and light commercial applications. A variety of trims, compatible styles and finishes are available to achieve the proper décor and illumination.

Housing: Pre-wired housing adjusts up to a 1-1/2" ceiling thickness. Integral thermal protector to guard against improper lamping and installation. Housing provides an adjustable socket plate which allows for use of different lamp types. Trim is secured with torsion wing springs/standard coil springs or serrated clips.

Mounting: Housing suitable for new construction installations only, supplied with (2) 24" adjustable hanger bars with 90 degrees repositioning ability. Hanger bars equipped with nail-less install 3/4" serrated barbed studs and with captive nails, for faster and easier secure mounting in wood joists. Set-screws lock into position and prevent shifting after installation. Earthquake structural cable compatible for drop panel ceiling or any other mounting that requires direct support from structural ceilings.

Socket: Energy Efficient GU24 socket with high temperature leads.

Junction Box : 16 gauge pre-wired galvanized steel Junction Box, 32 cubic-inch for a maximum of (8) #12 AWG wires. Furnished with (7) 3/4" and (4) Romex knock-outs. Strain clamps to install or remove covers for easy access and ground wire. Equipped with safety standard fitting for flex-conduit.

Insulation Contact: IC rated housing rated for direct contact with loosefill blown and rolled insulation.

Airflow: Airtight option is designed to restrict air flow from room into plenums in compliance to the WSEC - Washington State Energy Code, (Less than 2.0 CFM -Cubic Feet per Minute). Complies to Title24 air flow requirements (Air-tight).

Safety Labels: UL/CUL listed for through-branch wiring (8) No.12 AWG 90°C and suitable for damp locations. NYC approved: Calendar #41937.

ENERGY STAR: Qualified when used with Energy Star Qualified 13W-26W GU24 CFL Lamp (ordering: LLFQT-XX: XX= 13W, 18W or 26W)

Caution: Use of any 3rd party lamp source in this unit is subject to the lamp/module manufacturer's own limitations. In no way does LITON make any claims to compatibility in regards to form, fit, usage and case temperature conditions with other manufacturer's products. Users are responsible for confirming compatibility under all aforementioned conditions before using this product.

Label: UL Listed


FEATURE:



Application: Great for basic area lighting of a room or space. The 5" reflector trims produce a low, bright illumination with a choice of reflector and trim ring color combination. The clear reflector produces a maximum light output while minimizing the source. The black reflector creates a "hidden" effect that obscures the glare of the lamp. All of the color choices create an outstanding general illumination that is suitable in both residential and light commercial applications.

Mounting: Steel pressure springs mounted on trim to ensure positive retention inside housing.

Label: UL Listed, cETL Listed

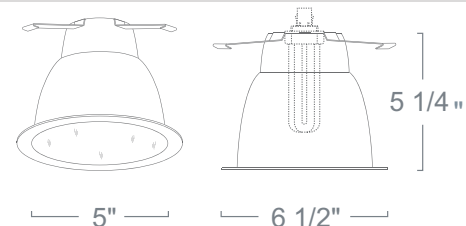

5" BRACKET MOUNTED GU24 HOUSING LH51CA-GU24

120V 13W-26W CFL GU24 Max

LABEL

LH51CA-GU24-LBL13	:13W CFL
LH51CA-GU24-LBL1326	:13-26W CFL
LH51CA-GU24-LBL18	:18W CFL
LH51CA-GU24-LBL26	:26W CFL

SELF FLANGED REFLECTOR

LR541 CFL/120V 75W Max DTT, 32W TTT

FINISH

LR541CWF	:Clear Reflector/White Flange
LR541WWF	:White Reflector/White Flange
LR541CCF	:Clear Reflector / Clear Flange

Ordering example: LH51CA-GU24-LBL1326/LR541WWF