


New Construction Housing w/ 5" & 6" GU24 Square LED (1100Lm)

5"

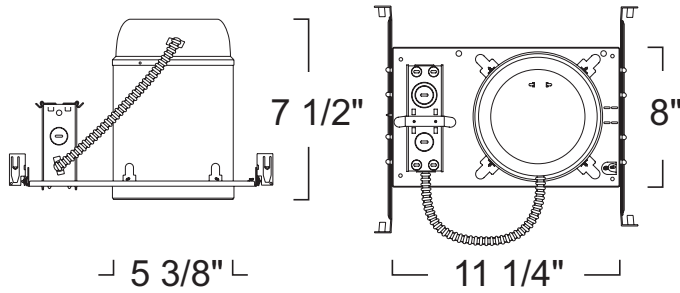

SPECIFICATION

Ceiling cut-out: 5 3/4"

Application: General purpose housing specially designed for use with Liton's LRELD5 Series Retrofit-able GU24 LED Trims and Cree's LR4 LED Module.

Housing: Pre-wired housing adjusts up to a 1-1/2" ceiling thickness. Integral thermal protector to guard against improper lamping and installation. Trim is secured with torsion wing springs/standard coil springs or serrated clips.

Mounting: Housing suitable for new construction installations only, supplied with (2) 24" adjustable hanger bars with 90 degrees repositioning ability. Hanger bars equipped with nail-less install 3/4" serrated barbed studs and with captive nails, for faster and easier secure mounting in wood joists. Set-screws lock into position and prevent shifting after installation. Earthquake structural cable compatible for drop panel ceiling or any other mounting that requires direct support from structural ceilings.

Socket: Specialty Energy Efficient GU24 socket with high temperature leads. Socket mounts directly on trim, then trim is installed into housing.

Junction Box : 16 gauge pre-wired galvanized steel Junction Box, 32 cubic-inch for a maximum of (8) #12 AWG wires. Furnished with (7) 3/4" and (4) Romex knock-outs. Strain clamps to install or remove covers for easy access and ground wire. Equipped with safety standard fitting for flex-conduit.

Insulation Contact: IC rated housing rated for direct contact with loosefill blown and rolled insulation.

Airflow: Airtight option is designed to restrict air flow from room into plenums in compliance to the WSEC - Washington State Energy Code, (Less than 2.0 CFM -Cubic Feet per Minute). Complies to Title24 air flow requirements (Air-tight).

Safety Labels: UL/CUL listed for through-branch wiring (8) No.12 AWG 90°C and suitable for damp locations. NYC approved: Calendar #41937.

Insulation Contact: Energy Efficient LED housing comes standard with IC rating for direct contact with loosefill blown and rolled insulation.

Caution: Use of any 3rd party lamp source in this unit is subject to the lamp/module manufacturer's own limitations. In no way does LITON make any claims to compatibility in regards to form, fit, usage and case temperature conditions with other manufacturer's products. Users are responsible for confirming compatibility under all aforementioned conditions before using this product.

Caution: LITON recommends use of surge protectors on the power entering LED Housings. Surge damage is not covered by warranty.

FEATURE:



Application: 6" General Purpose LED Trim with GU24 Base is perfect for Retrofit, New Construction and Remodel Applications in low to medium height ceilings.

Mounting: Mounts into standard 5 & 6" General Purpose Recessed housing with steel pressure springs mounted on trim to ensure positive retention inside housing. Alternate mounting methods available, consult factory.

Power Connection: Comes standard with GU24 socket mounted to top of fixture. Meets CA Title 24 Requirements and other standards restricting the use of Medium Base or Bi-Pin Sockets.


Lumen Maintenance: Minimum 50,000 hours L70 life based on ANSI TM-21 calculations from LM80 standardized test results.

Thermal Management: Effective thermal dissipation facilitated by integral cast-aluminum, finned heat sink design for maximum heat rejection to provide long LED life.

Driver: Electronic Direct Current driver mounted on fixture. Smoothly dims down to 5% with standard Low Voltage dimmers.

Safety Labels: ETL/CETL listed. UL listed for wet locations. NYC approved: Calendar#41937.

Warranty: Covered by a 3 Year Warranty to be free of defects in materials and craftsmanship. Recommended for applications where ambient temperatures do not exceed 35°C, installations exceeding this temperature will result in reduced LED lamp life and a voided warranty.

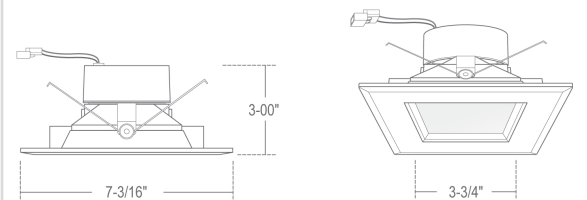

NEW CONSTRUCTION HOUSING LH5ICA-LLF-GU24 LED

DESCRIPTION
LH5ICA-LLF-GU24: New Construction Housing

5" & 6" GU24 SQUARE LED (1100LM) LREBLDQ5602 120VAC 16W

FINISH	COLOR TEMP	OPTION
LREBLDQ5602W: White Reflector/White Ring	-T27: 2700K*	/S-GU24-MED :Med Base
	-T30: 3000K*	Blank :/Non
	-T35: 3500K	
	-T40: 4000K*	

* Special Order Item. Consult factory for stock.

Ordering example: LH5ICA-LLF-GU24-LBL13/LREBLDQ5602W-T27/S-GU24-MED


LREBLDQ5602 - PHOTOMETRY

5" & 6" GU24 SQUARE LED

LREBLDQ5602W-T30 - 3,000K

System Power	:15.6W	Multipliers	
Test Date	:6/2016	4,000K	1.04
Beam Angle 50%	:105.4°	3,500K	1.02
Field Angle 10%	:147.3°	2,700K	0.95
Color Temperature	:2,973K		
CRI	:91.7		
R9 Value	:53.1		
Lumens Delivered	:1,112Lm		
CBCP	:428cd		
Power Factor	:0.97		

CANDELA TABULATION



FOOTCANDLE DISTRIBUTION

Height	Beam Diameter	FC
3.3'	8.6'	39.8
6.5'	17.2'	9.9
10'	25.8'	4.4
13'	34.4'	2.5
16'	43.1'	1.6