


Light Commercial Housing w/ Open Kick Plate Wall Wash LH660 SERIES - 6" LIGHT COMMERCIAL INCANDESCENT RECESSED LIGHTING

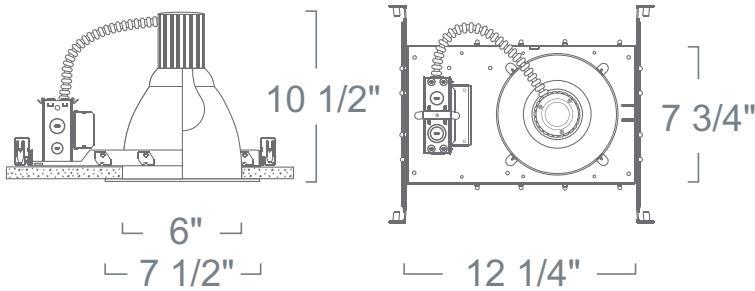

SPECIFICATION

Ceiling cut-out: 6 1/2"

Application: Architectural-grade recessed downlight housing for low to medium height ceilings and commercial installations. A variety of trims, compatible styles and finishes are available to achieve the proper décor and illumination.

Housing & Mounting Frame: 18 gauge galvanized flat frame with powder coat finish. Supplied with (2) 24" adjustable bar hangers (90 degrees repositioning ability). Bar hangers equipped with (nail-less installation) 3/4" serrated barbed studs for secure mounting in wood joists. Can also be mounted to grid panel ceiling. Earthquake structural cable compatible for drop panel ceiling or any other mounting that requires direct support from structural ceilings.

Socket Cap: Extruded aluminum socket cap, 1 1/4" vertically adjustable socket arm with set screw which enables the use of multiple lamp types and repositioning to optimize lamp performance. Furnished with heat sink fins to vent lamp heat and extend lamp life. Accepts compatible reflector trims.

Socket: Standard porcelain medium screw base socket with high temperature leads.

Junction Box: 16 gauge pre-wired galvanized steel double Junction Box, 64 cubic-inch for a maximum of (8) #12 AWG wires. Furnished with (10) 3/4", (2) 1" and (8) Romex knock-outs. Strain clamps to install or remove covers for easy access and ground wire. Equipped with safety standard die-cast aluminum fitting for flex-conduit.

Insulation Contact: Non-IC rated housing must be kept 3" from insulation.

Safety Labels: ETL/CETL listed for through-branch wiring (8) No.12 AWG 90°C and suitable for damp locations. NYC approved: Calendar #41937.

Label: UL Listed, cETL Listed


FEATURE:



Application: Light commercial recessed downlight trim for medium to high ceilings for commercial and high-end residential environments installations. Reflector designed for minimal glare from lamp without sacrificing lumen output. Provides wall wash illumination along the vertical surface for lighting signage or to emphasize wall textures. Proper illumination of walls enhances the mood in a room and gives a more spacious feel.

Mounting: Pre-punched key holes allow mounting of socket cap assembly for housing, with vertically adjustable socket cap. Reflector held in place with 6 steel pressure springs mounted on housing frame.

Label: UL Listed, cETL Listed

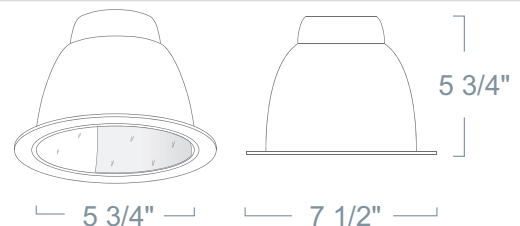

LIGHT COMMERCIAL HOUSING
LH660 120V 150W PAR38/A19 MED E26

WATTAGE

LH660:150W

OPEN KICK PLATE WALL WASH
LR677 120V 150W PAR30/A19

BAFFLE FINISH **RING FINISH**

LR677C :Clear **Blank** :White

LR677S :Satin Haze

Ordering example: LH660/LR677C