


Remodel Housing 120V/277V w/ Adjustable Spot w/ Baffle LH7LV SERIES - 6" LOW VOLTAGE RECESSED LIGHTING

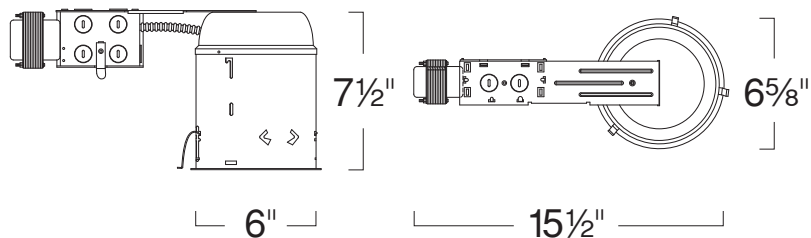

SPECIFICATION

Ceiling cut-out: 6 1/4"

Housing: Pre-wired housing adjusts up to 1 1/4" ceiling thickness. This housing has torsion remodeling clips for secure installation. Integral thermal protector to guard against improper lamping and installation. Housing provides an adjustable socket plate which allows for use of different lamp types. Trim is secured with torsion wing springs/standard coil springs. Designed to be installed in existing sheet rock ceilings via ceiling cut out (above ceiling access is not required).

Mounting: Housing suitable for existing or new construction installations, supplied with high tension remodeling clips, designed to secure the housing to an existing sheetrock ceiling for fast and easy installation.

Transformer: Class H insulated magnetic transformer installed adjacent to Junction Box, bottom and top accessible. Thermally protected rated for 90° C

Socket: 2-pin porcelain socket with aluminum heat sink plate. Lamp clips to trim to ensure proper and consistent positioning.

Junction Box : 16 gauge pre-wired galvanized steel Junction Box, 32 cubic-inch for a maximum of (8) #12 AWG wires. Furnished with (7) 3/4" and (4) Romex knock-outs. Strain clamps to install or remove covers for easy access and ground wire. Equipped with safety standard fitting for flex-conduit.

Insulation Contact: Non-IC rated housing must be kept 3" from insulation.

Safety Labels: UL/CUL listed for through-branch wiring (8) No.12 AWG 90°C and suitable for damp locations. NYC approved: Calendar #41937.

Label: cETL Listed

FEATURE:




Application: These **adjustable** fixtures provide flexibility and versatility by doubling as both a downlight and as an accent light. These trims have large degrees of rotation resulting in both visual style and practical ergonomics.

Mounting: Steel pressure springs mounted on trim to ensure positive retention inside housing.

Adjustability Lamp can be titled 45° degrees vertically and rotated 358° degrees horizontally.

Accessories: Takes (1) 2" Media.

Label: cETL Listed

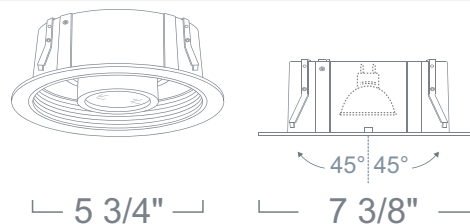

REMODEL HOUSING 120V/277V LH7RLV 12V 75W Max MR16 GU5.3

RATING	WATTAGE	VOLTAGE
LH7RLV :Standard	Blank :50W	Blank :120V/12V
	-75 :75W	-27 :277V/12V (Electronic*)

* Available with 120V/277V Magnetic Option, consult factory.

ADJUSTABLE SPOT W/ BAFFLE LR2610 12V 75W Max MR16

BAFFLE FINISH	RING FINISH
LR2610B :Black	Blank :White
LR2610N :All Natural*	B :Black
LR2610MO :All Mocha*	N :Natural
	CO :Copper
	MO :Mocha

* Comes standard with a matching ring finish. Use "W" for White Ring.

Ordering example: LH7RLV/LR2610B