


## Remodel E26 Housing w/ Open Trim

### LH7 SERIES - 6" LINE VOLTAGE RECESSED LIGHTING

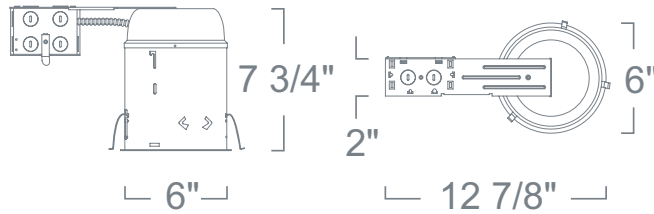

### SPECIFICATION

Ceiling cut-out: 6 1/4"

**Application:** General purpose recessed downlight housing for medium to high ceilings for residential and light commercial applications. A variety of trims, compatible styles and finishes are available to achieve the proper décor and illumination.

**Housing:** Pre-wired housing adjusts up to 1 1/4" ceiling thickness. This housing has torsion remodeling clips for secure installation. Integral thermal protector to guard against improper lamping and installation. Housing provides an adjustable socket plate which allows for use of different lamp types. Trim is secured with torsion wing springs/standard coil springs. Designed to be installed in existing sheet rock ceilings via ceiling cut out (above ceiling access is not required).

**Mounting:** Housing suitable for existing or new construction installations, supplied with high tension remodeling clips, designed to secure the housing to an existing sheetrock ceiling for fast and easy installation.

**Socket:** Standard porcelain medium screw base socket with high temperature leads.

**Junction Box:** 16 gauge pre-wired galvanized steel Junction Box, 32 cubic-inch for a maximum of (8) #12 AWG wires. Furnished with 3/4", 1" and Romex knock-outs. Strain clamps to install or remove covers for easy access and ground wire. Equipped with safety standard fitting for flex-conduit.

**Insulation Contact:** Non IC rated housing must be kept 3" from insulation. IC rated housing rated for direct contact with low to medium density loosefill blown and rolled insulation. For use with high density loose fill blown insulation, reduce rated lamp wattage accordingly (roughly %15-%20).

**Airflow:** Airtight option is designed to restrict air flow from room into plenums in compliance to the WSEC - Washington State Energy Code, (Less than 2.0 CFM -Cubic Feet per Minute). Complies to Title24 air flow requirements (Air-tight).

**Safety Labels:** UL/CUL listed for through-branch wiring (8) No.12 AWG 90°C and suitable for damp locations. NYC approved: Calendar #41937.

**Label:** UL Listed, cETL Listed


### FEATURE:



**Application:** Open style downlights allow for maximum light output. The 100% lumen efficiency ensures no light leakage or lumen loss inside the trim or housing. The lamp is situated at the surface of the ceiling in order to get a maximum lumen output. Their simple design also allows for a budget friendly initial cost while ensuring that none of the light from the lamp is lost.

**Mounting:** Steel pressure springs mounted on trim to ensure positive retention inside housing.

**Label:** UL Listed, cETL Listed

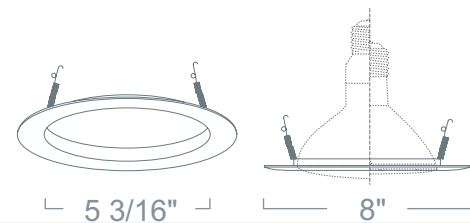

**REMODEL E26 HOUSING**  
**LH7R** 120V 150W Max R30/PAR30/PAR38/A19 MED E26

#### RATING

LH7RICA:IC-Airtight

**OPEN TRIM**  
**LR40** 120V/HID 150W Max PAR38/R40

#### RING FINISH


**LR40W** :White  
**LR40C** :Clear  
**LR40G** :Gold  
**LR40PB** :Polished Brass

Ordering example: LH7RICA/LR40W

Type :

Project :

Catalog # :

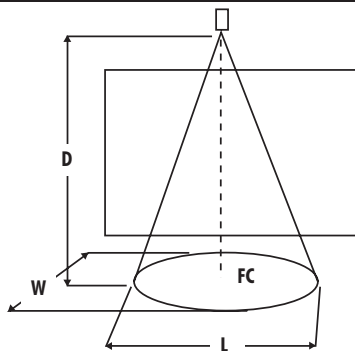

D : Distance to the horizontal or vertical surface.  
 FC : Initial foot candles at the center of the beam.  
 L : Length of the beam where candle power is reduced to 50% of center beam candle power.  
 W : Width of the beam where candle power is reduced to 50% of center beam candle power.

Lamp data given is typical and is based on bare lamp performance. Contact lamp manufacturers for availability and specific performance. Distance, length, and width given in decimal feet.

### PAR38 Halogen E26 Medium Base



0° Aiming Angle  
 Horizontal Foot candles  
 D FC L W

|                           |    |     |     |     |
|---------------------------|----|-----|-----|-----|
| 45W PAR / CAP / SPL / SP9 | 6  | 278 | 2.2 | 2.2 |
| Beam Spread = 9°          | 8  | 156 | 2.6 | 2.6 |
| CBCP = 10,000             | 10 | 100 | 3.1 | 3.1 |
| Rated Life = 2,500 Hrs.   | 12 | 69  | 3.5 | 3.5 |

|                            |   |     |     |     |
|----------------------------|---|-----|-----|-----|
| 45W PAR / CAP / SPL / FL30 | 3 | 167 | 2.0 | 2.0 |
| Beam Spread = 30°          | 4 | 64  | 2.5 | 2.5 |
| CBCP = 1,500               | 5 | 60  | 3.1 | 3.1 |
| Rated Life = 2,500 Hrs.    | 6 | 42  | 3.6 | 3.6 |

|                             |   |     |     |     |
|-----------------------------|---|-----|-----|-----|
| 45W PAR / CAP / SPL / WFL50 | 2 | 175 | 1.8 | 1.8 |
| Beam Spread = 50°           | 3 | 78  | 2.3 | 2.3 |
| CBCP = 700                  | 4 | 44  | 2.8 | 2.8 |
| Rated Life = 2,500 Hrs.     | 5 | 28  | 3.2 | 3.2 |

|                           |    |     |     |     |
|---------------------------|----|-----|-----|-----|
| 60W PAR / CAP / SPL / SP9 | 8  | 250 | 2.5 | 2.5 |
| Beam Spread = 9°          | 11 | 132 | 3.6 | 3.6 |
| CBCP = 16,000             | 14 | 82  | 4.7 | 4.7 |
| Rated Life = 3,000 Hrs.   | 17 | 55  | 5.8 | 5.8 |

|                             |   |     |     |     |
|-----------------------------|---|-----|-----|-----|
| 60W PAR / CAP / SPL / NFL25 | 4 | 206 | 2.5 | 2.5 |
| Beam Spread = 25°           | 5 | 132 | 3.1 | 3.1 |
| CBCP = 3,300                | 6 | 92  | 3.6 | 3.6 |
| Rated Life = 3,000 Hrs.     | 7 | 67  | 4.1 | 4.1 |

|                            |   |     |     |     |
|----------------------------|---|-----|-----|-----|
| 60W PAR / CAP / SPL / FL30 | 3 | 278 | 3.5 | 3.5 |
| Beam Spread = 30°          | 4 | 156 | 4.6 | 4.6 |
| CBCP = 2,500               | 5 | 100 | 5.6 | 5.6 |
| Rated Life = 3,000 Hrs.    | 6 | 69  | 6.6 | 6.6 |

|                           |    |     |     |     |
|---------------------------|----|-----|-----|-----|
| 90W PAR / CAP / SPL / SP9 | 9  | 274 | 2.7 | 2.7 |
| Beam Spread = 9°          | 12 | 154 | 3.5 | 3.5 |
| CBCP = 22,000             | 15 | 99  | 4.4 | 4.4 |
| Rated Life = 2,500 Hrs.   | 18 | 69  | 5.3 | 5.6 |

|                            |    |     |     |     |
|----------------------------|----|-----|-----|-----|
| 90W PAR / CAP / SPL / FL30 | 4  | 219 | 3.6 | 3.6 |
| Beam Spread = 30°          | 6  | 97  | 4.7 | 4.7 |
| CBCP = 3,500               | 8  | 55  | 5.8 | 5.8 |
| Rated Life = 2,500 Hrs.    | 10 | 35  | 6.8 | 6.8 |

|                             |   |     |     |     |
|-----------------------------|---|-----|-----|-----|
| 120W PAR / CAP / SPL / FL30 | 4 | 288 | 1.3 | 1.3 |
| Beam Spread = 30°           | 5 | 184 | 1.7 | 1.7 |
| CBCP = 4,600                | 6 | 128 | 2.0 | 2.0 |
| Rated Life = 3,000 Hrs.     | 7 | 94  | 2.3 | 2.3 |

|                              |   |     |     |     |
|------------------------------|---|-----|-----|-----|
| 120W PAR / CAP / SPL / WFL50 | 3 | 222 | 2.0 | 2.0 |
| Beam Spread = 50°            | 4 | 125 | 2.5 | 2.5 |
| CBCP = 2,000                 | 5 | 80  | 3.1 | 3.1 |
| Rated Life = 3,000 Hrs.      | 6 | 56  | 3.6 | 3.6 |

|                             |    |     |     |     |
|-----------------------------|----|-----|-----|-----|
| 250W PAR / CAP / SPL / SP10 | 13 | 275 | 2.3 | 2.3 |
| Beam Spread = 10°           | 18 | 144 | 3.2 | 3.2 |
| CBCP = 46,500               | 23 | 88  | 4.1 | 4.1 |
| Rated Life = 4,500 Hrs.     | 28 | 59  | 5.1 | 5.1 |

|                             |    |     |     |     |
|-----------------------------|----|-----|-----|-----|
| 250W PAR / CAP / SPL / FL30 | 6  | 250 | 1.7 | 1.7 |
| Beam Spread = 30°           | 8  | 141 | 2.1 | 2.1 |
| CBCP = 9,000                | 10 | 90  | 2.6 | 2.6 |
| Rated Life = 4,500 Hrs.     | 12 | 63  | 3.1 | 3.1 |