


IC Double Wall E26 Housing w/ Shallow Reflector

LH99 SERIES - 4" LINE VOLTAGE RECESSED LIGHTING (PAR20/PAR30)

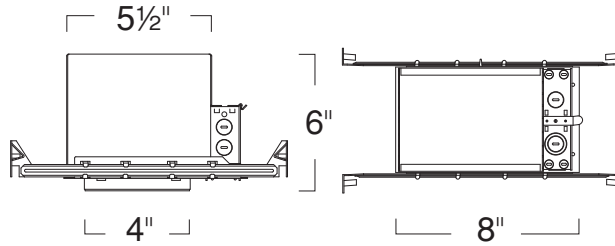

SPECIFICATION

Ceiling cut-out: 4 1/2"

Application: General purpose recessed downlight housing for low to medium height ceilings for residential and light commercial applications. A variety of trims, compatible styles and finishes are available to achieve the desired décor and illumination.

Housing: Pre-wired housing adjusts up to a 1 1/4" ceiling thickness. Integral thermal protector to guard against improper lamping and installation. Housing provides an adjustable socket plate which allows for use of different lamp types. Trim is secured with torsion wing springs.

Mounting: Housing suitable for new construction installations only, supplied with (2) 24" adjustable hanger bars with 90 degrees repositioning ability. Hanger bars equipped with nail-less install 3/4" serrated barbed studs and with captive nails, for faster and easier secure mounting in wood joists. Set-screws lock into position and prevent shifting after installation. Earthquake structural cable compatible for drop panel ceiling or any other mounting that requires direct support from structural ceilings.

Socket: Standard porcelain medium screw base socket with high temperature leads.

Junction Box : 16 gauge pre-wired galvanized steel Junction Box, 32 cubic-inch for a maximum of (8) #12 AWG wires. Furnished with (7) 3/4" and (4) Romex knock-outs. Strain clamps to install or remove covers for easy access and ground wire. Equipped with safety standard fitting for flex-conduit.

Insulation Contact: IC rated housing rated for direct contact with low to medium density loosefill blown and rolled insulation. For use with high density loosefill blown insulation, reduce rated lamp wattage accordingly (roughly %15-%20).

Airflow: Airtight option is designed to restrict air flow from room into plenums in compliance to the WSEC - Washington State Energy Code, (Less than 2.0 CFM -Cubic Feet per Minute). Complies to Title24 air flow requirements (Air-tight).

Safety Labels: UL/CUL listed for through-branch wiring (8) No.12 AWG 90°C and suitable for damp locations. NYC approved: Calendar #41937.

Label: UL Listed, cETL Listed

FEATURE:




Application: Used for general lighting applications, The 4" reflector trim, with its clean and durable die-cast construction ring, provides a smooth illumination in short throw distances such as general spaces as well as tighter spaces such as soffits and counters.

Gasket: Supplied with gasket to prevent light leakage and unsightly heat streaks on ceiling surface.

Mounting: Steel pressure springs mounted on trim to ensure positive retention inside housing.

Label: UL Listed, cETL Listed

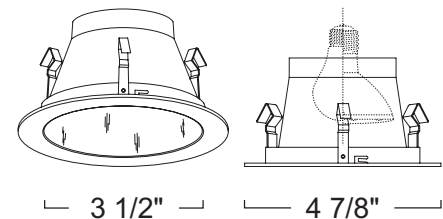

IC DOUBLE WALL E26 HOUSING

LH99IC 120V 50W Max PAR20/PAR30 MED E26, 40W A19

RATING

LH99ICA: IC-Airtight

SHALLOW REFLECTOR

LR999 120V/CFL/HID 50W Max PAR20, 40W A19

REFLECTOR FINISH

- LR999B** :Black Reflector/ White Ring
- LR999C** :Clear Reflector/ White Ring
- LR999N** :All Natural
- LR999CO** :All Copper
- LR999MO** :All Mocha
- LR999S** :Satin Haze Reflector/ White Ring
- LR999SN** :Satin Reflector/ Natural Ring
- LR999W** :White Reflector/ White Ring

* Comes standard with a matching ring finish.


Ordering example: LH99ICA/LR999B

PROJECT INFORMATION

Type :

Project :

Catalog # :

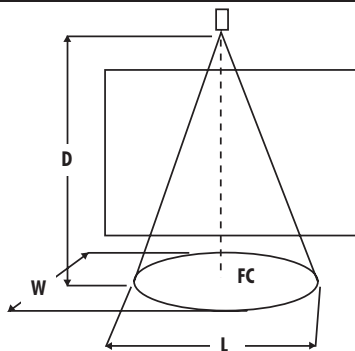

- D : Distace to the horizontal or vertical surface.
 FC : Initial foot candles at the center of the beam.
 L : Length of the beam where candle power is reduced to 50% of center beam candle power.
 W : Width of the beam where candle power is reduced to 50% of center beam candle power.

Lamp data given is typical and is based on bare lamp performance. Contact lamp manufacturers for availability and specific performance. Distance, length, and width given in decimal feet.

PAR20 Halogen E26 Medium Base



0° Aiming Angle
 Horizontal Foot candles
 D FC L W

35W PAR20 / HAL / NSP10
 Beam Spread = 10°
 CBCP = 3,000
 Rated Life = 2,500 Hrs.

4	188	0.9	0.9
5	120	1.1	1.1
6	83	1.3	1.3
7	61	1.4	1.4

35W PAR20 / HAL / NFL30
 Beam Spread = 30°
 CBCP = 800
 Rated Life = 2,500 Hrs.

2	200	1.3	1.3
3	89	1.8	1.8
4	50	2.4	2.4
5	32	2.9	2.9

35W PAR20 / HAL / WFL40
 Beam Spread = 40°
 CBCP = 500
 Rated Life = 2,500 Hrs.

2	125	1.7	1.7
3	56	2.4	2.4
4	31	3.1	3.1
5	20	3.8	3.8

50W PAR20 / HAL / NSP10
 Beam Spread = 10°
 CBCP = 4,600
 Rated Life = 2,500 Hrs.

4	288	0.9	0.9
5	184	1.1	1.1
6	128	1.3	1.3
7	94	1.4	1.4

50W PAR20 / HAL / NFL30
 Beam Spread = 30°
 CBCP = 1,200
 Rated Life = 2,500 Hrs.

2	300	1.3	1.3
3	133	1.8	1.8
4	75	2.4	2.4
5	48	2.9	2.9

50W PAR20 / HAL / WFL40
 Beam Spread = 40°
 CBCP = 550
 Rated Life = 2,500 Hrs.

2	138	1.7	1.7
3	61	2.4	2.4
4	34	3.1	3.1
5	22	3.8	3.8