


IC Airtight Housing w/ Deco Glass Panel

LH99P SERIES - 4" COMPACT FLUORESCENT RECESSED LIGHTING

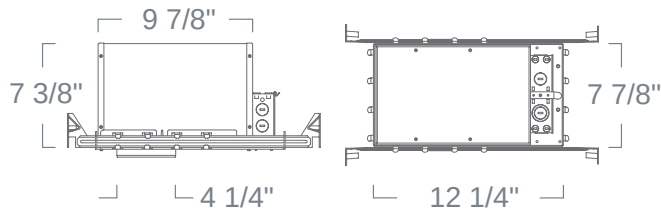

SPECIFICATION

Ceiling cut-out: 4 1/2"

Application: General purpose recessed downlight housing for low to medium height ceilings for residential and light commercial applications. A variety of trims, compatible styles and finishes are available to achieve the desired décor and illumination.

Housing: Pre-wired housing adjusts up to a 1 1/2" ceiling thickness. Integral thermal protector to guard against improper lamping and installation. Trim is secured with torsion wing springs/standard coil springs.

Mounting: Housing suitable for new construction installations only, supplied with (2) 24" adjustable hanger bars with 90 degrees repositioning ability. Hanger bars equipped with nail-less install 3/4" serrated barbed studs and with captive nails, for faster and easier secure mounting in wood joists. Set-screws lock into position and prevent shifting after installation. Earthquake structural cable compatible for drop panel ceiling or any other mounting that requires direct support from structural ceilings.

Ballast: Electronic Class P 60Hz Ballast with Inherent thermal protection. For Double Twin Tube (DTT) or Triple Twin Tube Lamps (TTT). Sound A rated. Micro-Processor controlled. Min. starting temperature -10°C. Accessible from above or below the ceiling. Contact factory for detailed technical information on ballast specifications. Note: For dimming applications must use compatible dimmer switch. Consult specific ballast manufacturer for up-to-date compatibility list.

Socket: Thermo-plastic socket UL Listed rated for high temperature and provides nickel plated contacts. Either accepts 2-Pin lamps for use with magnetic ballast or 4-Pin lamps with electronic ballast selection.

Junction Box: 16 gauge pre-wired galvanized steel Junction Box, 32 cubic-inch for a maximum of (8) #12 AWG wires. Furnished with (7) 3/4" and (4) Romex knock-outs. Strain clamps to install or remove covers for easy access and ground wire. Equipped with safety standard fitting for flex-conduit.

Insulation Contact: IC rated housing rated for direct contact with low to medium density loosefill blown and rolled insulation.

Safety Labels: ETL/CETL listed for through-branch wiring (8) No.12 AWG 90°C and suitable for damp locations. NYC approved: Calendar #41937.

Emergency Option: Emergency back-up operates one lamp for a minimum of 90 minutes at 750 Lumens in case of power outage. Unit is remotely mounted. It includes battery, charger, and test switch with indicator light. Consult Factory for 1300 Lumen Package.

Label: cETL Listed

FEATURE:




Application: This trim creates a small colorful accent light that adds to any interior environment. Each glass trim has its own unique design that allows it to be used in a variety of applications.

Gasket: Supplied with gasket to prevent light leakage and unsightly heat streaks on ceiling surface.

Mounting: Steel pressure springs mounted on trim to ensure positive retention inside housing.

Label: UL Listed, cETL Listed

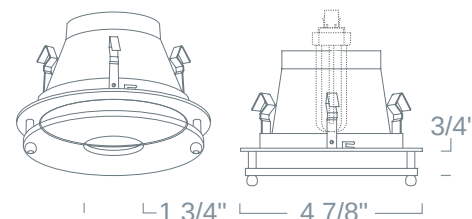

IC AIRTIGHT HOUSING

LH99PICA CFL 13W DTT, 18W/26W TTT

WATTAGE + BALLAST	OPTIONS
LH99PICA : 13W IC Airtight (No Box)	Blank : None
LH99PICA-26E : 26W 120V	-27 : 120V/277V
LH99PICA-1326UE : 13W/18W/26W 120V/277V IC Airtight	-EM : Emergency
LH99PICA-18E : 18W Magnetic (No Box)	

DECO GLASS PANEL

LR942 CFL 13W Max DTT, 26W TTT

REFLECTOR FINISH	RING FINISH	GLASS
LR942W : White	Blank : White	Blank : Frosted
LR942B : Black	B : Black	
LR942C : Clear	C : Chrome	
LR942G : Gold	G : Gold	
LR942N : All Natural*	N : Natural	
LR942CO : All Copper*	CO : Copper	
LR942MO : All Mocha*	MO : Mocha	
LR942S : Satin Haze		

* Comes standard with a matching ring finish. Use "W" for White Ring.
Comes Standard w/ Frosted Disc

Ordering example: LH99PICA-E-EM/LR942W