


Remodel w/ Deco Glass (Cone) LH99 SERIES - 4" LINE VOLTAGE RECESSED LIGHTING (GU10)

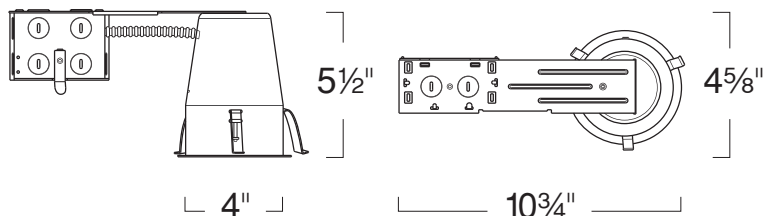

SPECIFICATION

Ceiling cut-out: 4 1/4"

Application: General purpose recessed downlight housing for low to medium height ceilings for residential and light commercial applications. A variety of trims, compatible styles and finishes are available to achieve the desired décor and illumination.

Housing: Pre-wired housing adjusts up to 1 1/4" ceiling thickness. This housing has torsion remodeling clips for secure installation. Integral thermal protector to guard against improper lamping and installation. Housing provides an adjustable socket plate which allows for use of different lamp types. Trim is secured with torsion wing springs/standard coil springs. Designed to be installed in existing sheet rock ceilings via ceiling cut out (above ceiling access is not required).

Mounting: Housing suitable for existing or new construction installations, supplied with high tension remodeling clips, designed to secure the housing to an existing sheetrock ceiling for fast and easy installation.

Socket: Standard porcelain GU10 "Twist & Lock" socket with high temperature leads.

Junction Box: 16 gauge pre-wired galvanized steel Junction Box, 32 cubic-inch for a maximum of (8) #12 AWG wires. Furnished with (6) 3/4" and (4) Romex knock-outs. Strain clamps to install or remove covers for easy access and ground wire. Equipped with safety standard fitting for flex-conduit.

Insulation Contact: IC rated for 12W LED or lower. Non IC rated for more than 12W housing must be kept 3" from insulation.

Airflow: Airtight option is designed to restrict air flow from room into plenums in compliance to the WSEC - Washington State Energy Code, (Less than 2.0 CFM -Cubic Feet per Minute). Complies to Title24 air flow requirements (Air-tight).

Safety Labels: ETL/CETL listed for through-branch wiring (8) No.12 AWG 90°C and suitable for damp locations. NYC approved: Calendar #41937.

Label: cETL Listed

FEATURE:



Application: Combines the elements of a clear reflector and the soft, warm glow of light to illuminates walls and ceilings. The **Decorative Glass** trims add elegance to your design and make an architectural statement in any environment.


Gasket: Supplied with gasket to prevent light leakage and unsightly heat streaks on ceiling surface.

Lens Inclusion: Clear glass protective safety lens included in packaging.

Mounting: Steel pressure springs mounted on trim to ensure positive retention inside housing.

Accessories: Takes up to (2) 2" Media.

Label: UL Listed, cETL Listed

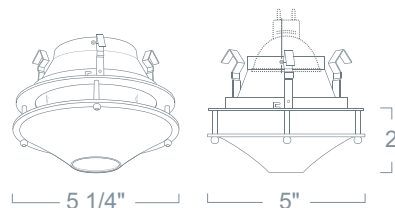

REMODEL LH99RA-GU10 120V 50W Max MR16 GU10

WATTAGE	VOLTAGE
LH99RA-GU10:50W	Blank :120V

DECO GLASS (CONE) LR1400 120V 50W Max MR16

REFLECTOR FINISH	RING FINISH	GLASS
LR1400W :White	Blank :White	-FR :Frosted
LR1400B :Black	B :Black	
LR1400C :Clear	C :Chrome	
LR1400G :Gold	N :Natural	
LR1400CO :All Copper*	CO :Copper	
LR1400MO :All Mocha*	MO :Mocha	
LR1400S :Satin Haze		

* Comes standard with a matching ring finish. Use "W" for White Ring.

Ordering example: LH99RA-GU10/LR1400W-FR