


LH99RICA-QC: 4" REMODEL HOUSING (2-PIN ORANGE CONNECTOR) (18W)



Ceiling Cut Out: 4- 1/4"

- For use with LITON LRELD4 Series Retrofit-able quick connect trims
- 2-Pin Orange Push-In Quick Connector
- CA's Title 24 Compliant

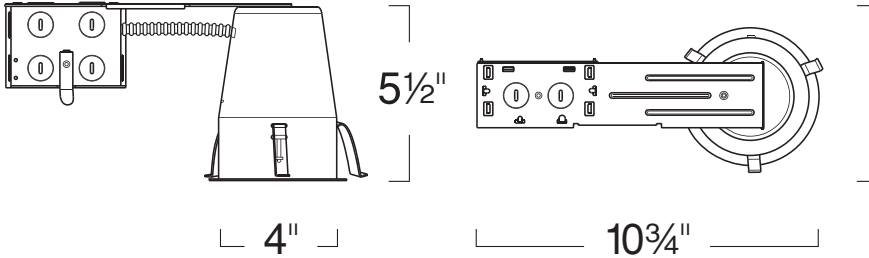

ORDERING – Example: LH99RICA-QC-EMAC

LH99RICA-QC

Fixture

Finish

Finish

Blank

Blank

15W Battery

-EMAC

Back-up

COMPATIBLE ITEMS

LRESQD402
4" LED Square
(Dimmable)



LREQD402
4" LED Square
Trim



LRELD402
Reflector Flat Lens
(Dimmable)



LRELD403
4" LED Baffle Flat Lens
(Dimmable)



LRELD442
4" LED Reflector Dome
Lens (Dimmable)



LRELD443
4" LED Baffle Dome Lens
(Dimmable)



LREBLD402
4" LED Baffle Dome Lens
(Dimmable)



LRELD400
4" Economy LED Lensed
(Dimmable)



LRELD467
4" LED Adjustable Pull
Down (Dimmable)



LRLD4W-QC
4" Economy Led Baffle
(650Lm)



LRELD488W
Adjustable Gimbal
(600Lm)



LRELDQ488W
Adjustable Square
Gimbal (650Lm)



SPECIFICATION

Application

General purpose shallow housing specially designed for use with Liton's LRELD4 series Retrofit-able quick connect Trims

Housing

Pre-wired housing adjusts up to a 1-1/2" ceiling thickness. Integral thermal protector to guard against improper lamping and installation. Trim is secured with torsion wing springs/standard coil springs or serrated clips.

Mounting

Housing suitable for existing or new construction installations, supplied with high tension remodeling clips, designed to secure the housing to an existing sheetrock ceiling for fast and easy installation.

Connector:

Specialty Energy Efficient 2-Pin Orange Push-In Quick Connector with high temperature leads.

Junction Box

16 gauge pre-wired galvanized steel Junction Box, 32 cubic-inch for a maximum of (8) #12 AWG wires. Furnished with (7) 3/4" and (4) Romex knock-outs. Strain clamps to install or remove covers for easy access and ground wire. Equipped with safety standard fitting for flex-conduit

Airflow

Airtight option is designed to restrict air flow from room into plenums in compliance to the WSEC - Washington State Energy Code, (Less than 2.0 CFM -Cubic Feet per Minute). Complies to Title24 air flow requirements (Air-tight).

Safety Labels

UL/CUL listed for through-branch wiring (8) No.12 AWG 90°C. UL/CUL listed for damp locations and wet locations when used with designated trims. NYC approved: Calendar #41937.

Insulation Contact

(-DUN) option is a universal dimming system that works with most 3-Wire ELV, 2-Wire Incandescent and 5-Wire 0-10V fluorescent dimmers.

Caution

Use of any 3rd party lamp source in this unit is subject to the lamp/module manufacturer's own limitations. In no way does LITON make any claims to compatibility in regards to form, fit, usage and case temperature conditions with other manufacturer's products. Users are responsible for confirming compatibility under all aforementioned conditions before using this product.