


Remodel E26 Housing w/ Fire Barrier

LH99 SERIES - 4" LINE VOLTAGE RECESSED LIGHTING (PAR20/PAR30)

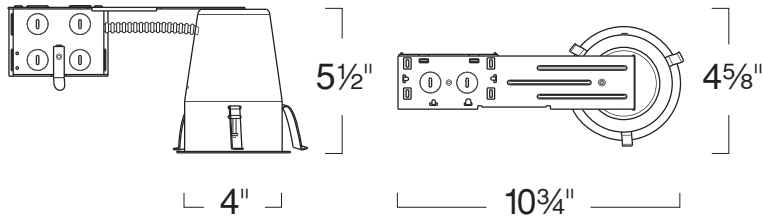

SPECIFICATION

Ceiling cut-out: 4 1/2"

Application: General purpose recessed downlight housing for low to medium height ceilings for residential and light commercial applications. A variety of trims, compatible styles and finishes are available to achieve the desired décor and illumination.

Housing: Pre-wired housing adjusts up to 1 1/4" ceiling thickness. This housing has torsion remodeling clips for secure installation. Integral thermal protector to guard against improper lamping and installation. Housing provides an adjustable socket plate which allows for use of different lamp types. Trim is secured with torsion wing springs/standard coil springs. Designed to be installed in existing sheet rock ceilings via ceiling cut out (above ceiling access is not required).

Mounting: Housing suitable for existing or new construction installations, supplied with high tension remodeling clips, designed to secure the housing to an existing sheetrock ceiling for fast and easy installation.

Socket: Standard porcelain medium screw base socket with high temperature leads.

Junction Box: 16 gauge pre-wired galvanized steel Junction Box, 32 cubic-inch for a maximum of (8) #12 AWG wires. Furnished with (6) 3/4" and (4) Romex knock-outs. Strain clamps to install or remove covers for easy access and ground wire. Equipped with safety standard fitting for flex-conduit.

Insulation Contact: Non-IC rated housing must be kept 3" from insulation.

Airflow: Airtight option is designed to restrict air flow from room into plenums in compliance to the WSEC - Washington State Energy Code, (Less than 2.0 CFM -Cubic Feet per Minute). Complies to Title24 air flow requirements (Air-tight).

Safety Labels: UL/CUL listed for through-branch wiring (8) No.12 AWG 90°C and suitable for damp locations. NYC approved: Calendar #41937.

Label: UL Listed, cETL Listed

FEATURE:



This galvanized welded steel enclosure is rated (able) for one-hour resistance to active fire. **LFB2012** enclosure is designed for use with both existing and new installation of Recessed Luminaires. Fulfills the required 1-hour-fire-resistance-rating, to operate as an active fire wall, with less effort.

FEATURES

- 24GA Galvanized welded steel constructed body
- 4 flanges with 3/16" nail/screw openings
- 16"/24" (apart) joist/stud applicable
- (6)1/2" knockouts provided for wire access
- UL/NFPA/ASTM evaluated; ETL certified.

INSTALLATION

The **LFB2012** requires a minimum of 9 1/2" Steel Stud or Wood Joist, and must be spaced either 16" or 24" apart. The Luminaire affixes to the interior of the Fire Barrier, **LFB2012** using self-tapping screws.

OPERATION

Liton's **LFB2012** acts as a physical barrier to stop the progress of an active fire. This one-hour minimum rating enclosure meets that of a typical 3/8" drywall barrier.


This unit eliminates the requirement to specify more costly fire rated luminaires and labor, such as, hand constructed drywall enclosures. Which normally are not consistent of uniform in their construction, as well as their ability to maintain the fire stop.

STANDARD APPROVALS

- ASTM-E119-00a
- UL263
- UBC 7-1
- NFPA 251
- ASI A2.1

Label: cETL Listed

Assembled in USA

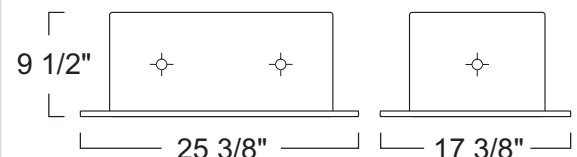

REMODEL E26 HOUSING

LH99R 120V 75W Max PAR20/PAR30 MED E26, 40W A19

RATING

LH99R :Standard
LH99RA :Airtight

FIRE BARRIER

LFB2012

INSIDE DEMENSIONS

LFB2012:19 3/8" X 12" X 9 1/2"

Ordering example: LH99R/LFB2012