




LHLD15-FRM : 1.5" P-SERIES


NEW CONSTRUCTION FRAME (FLANGED) ROUND/SQUARE FOR MICRO RECESSED LED DOWNLIGHT



Cut out: 1 3/4" max

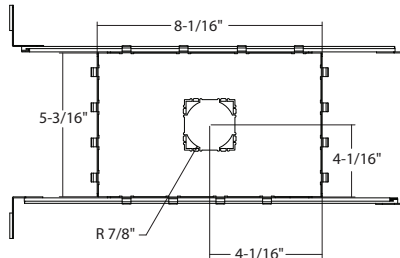

- New Construction Frame for new construction applications
- Lightweight-Durable, Galvanized Steel Frames
- Frame includes (x2) 24" Adjustable Hanger Bars
- Hanger bars equipped with 3/4" serrated barbed studs

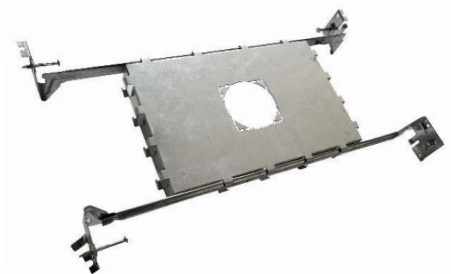

ORDERING : /LHLD15-FRM

LHLD15-FRM

Housing

Housing

1.5" New Construction Frame (Flanged) /LHLD15-FRM

COMPATABILITY

LRLD1521
1.5" P-Series
Miniature Round
400lm/800lm/
1400lm Flanged
Downlight







LRLD1521J
1.5" P-Series
Miniature Round
400lm/800lm/
1400lm Flanged
Adjustable
Downlight

LRLD1573
1.5" P-Series
Miniature Round
400lm/800lm/
1400lm Flanged
Wallwash

LRLDQ1521
1.5" P-Series
Miniature Square
400lm/800lm/
1400lm Flanged
Downlight

LRLDQ1521J
1.5" P-Series
Miniature Square
400lm/800lm/
1400lm Flanged
Adjustable
Downlight

LRLDQ1573
1.5" P-Series
Miniature Square
400lm/800lm/
1400lm Flanged
Wallwash





LHLD15-FRM : 1.5" **P**·SERIES

NEW CONSTRUCTION FRAME (FLANGED), ROUND/SQUARE
FOR MICRO RECESSED LED DOWNLIGHT

SPECIFICATION

Application

Although not required, the frame allows for support for the downlight in weak ceilings such as tiles and locations where a rough-in frame is desired for new construction applications.

Mounting

Housing suitable for new construction installations. Adjusts up to 3/4" ceiling thickness. Supplied with (2) 24" adjustable hanger bars. Hanger bars equipped with nail-less install 3/4" serrated barbed studs and with captive nails, for faster and easier secure mounting in wood joists. Set-screws lock into position and prevent shifting after installation. Trim is secured via positive retention friction clips.