
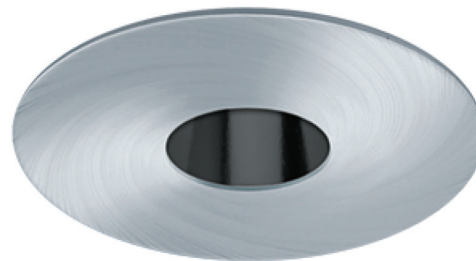


## 3" LED Remodel Housing (700lm) w/ 3" Micro-cast Pinhole (500lm)

### 3" LED

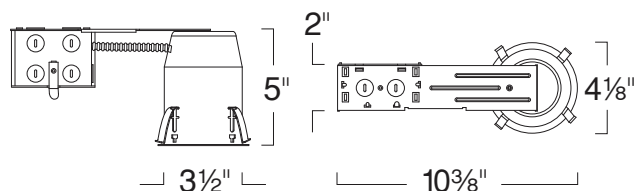

### SPECIFICATION

*Ceiling cut-out: 3 3/4"*

**Application:** This miniature General Purpose LED housing is perfect for low to medium height ceilings in residential and light commercial applications. Its small aperture makes it ideal for strategic placement where space is limited and energy savings is important. A variety of trim styles, finishes, and beam spreads are available to achieve a desired look.

**Housing:** Pre-wired housing adjusts up to a 1 1/4" ceiling thickness. Integral thermal protector to guard against improper lamping and installation. Trim is secured via positive retention friction clips.

**Mounting:** Housing suitable for existing or new construction installations, supplied with high tension remodeling clips, designed to secure the housing to an existing sheetrock ceiling for fast and easy installation.

**Power Connection:** LED heat sinked lamp module is replaceable via onboard quick exclusionary disconnect terminal. No tools required. Meets CA Title 24 Requirements and other standards restricting the use of Medium Base or Bi-Pin Sockets.

**Driver:** Electronic Direct Current U.L. Listed driver mounted away from LED Array for cool operation and end-of-life modularity. Comes standard with 120VAC input, available with optional 120V/277V universal voltage input. Consult factory.

**Dimming:** Standard dimming option smoothly dims down as low as 10% of initial light output with flicker-free operation works with standard Incandescent dimmers. Factory qualified for use with LUTRON Brand Dimmers: S600PR, DVSCCL-153P & DV600PR as well as Leviton® IP106-600W. Also dims with Electronic Low Voltage dimmers. Factory qualified for use with LUTRON Brand Dimmers: SELV-300P, DVELV-300P, NELV-450 along with 3-Way versions. "-DUN" Universal Dimming Option dims with above mention dimming controls along with standard 0-10V dimming signals.

**Emergency Options:** Emergency LED Battery Back-up available, remotely mounted adjacent to housing by installer. When AC power fails, the device immediately switches to the emergency mode, operating the LEDs for a minimum of 90 minutes. Remote test switch and plate cover included. Optional Generator Transfer Device switches the driver to auxiliary generator power during the loss of normal AC power, (recommended for applications requiring individual circuit switching).

**Junction Box:** 16 gauge pre-wired galvanized steel Junction Box, 32 cubic-inch for a maximum of (8) #12 AWG wires. Furnished with (6) 3/4" and (4) Romex knock-outs. Strain clamps to install or remove covers for easy access and ground wire. Equipped with safety standard fitting for flex-conduit.

**Insulation Contact:** Energy Efficient LED housing comes standard with IC rating for direct contact with loosefill blown and rolled insulation. (Due to higher temperatures in insulation environments, L70 Life Expectancy will be reduced by 35% for Non-Lensed Fixtures, and 50% for Lensed Fixtures when used with thermal insulation.)

**Application:** This miniature general purpose LED Pinhole trim is perfect for low to medium height ceilings in residential and light commercial applications. Its small aperture makes it ideal for strategic placement when tight beam spread control is required and energy savings is important. A variety of finishes and beam spreads are available to achieve a desired look.


**Gasket:** Supplied with gasket to prevent light leakage and unsightly heat streaks on ceiling surface.

**Power Connection:** LED heat sinked lamp module is replaceable via onboard quick exclusionary disconnect terminal. No tools required. Meets CA Title 24 Requirements and other standards restricting the use of Medium Base or Bi-Pin Sockets.

**Lumen Maintenance:** Minimum 35,000 hours L70 life based on ANSI TM-21 calculations from LM80 standardized test results.

**Thermal Management:** Effective thermal dissipation facilitated by integral cast-aluminum, finned heat sink design for maximum heat rejection to provide long LED life.

**Warranty:** Covered by a 3 Year Warranty to be free of defects in materials and craftsmanship. Recommended for applications where ambient temperatures do not exceed 35°C, installations exceeding this temperature will result in reduced LED lamp life and a voided warranty.



### 3" LED REMODEL HOUSING (700LM)

#### LHLD3R9C20 10W LED

| DIMMING                                             | OPTION                 |
|-----------------------------------------------------|------------------------|
| LHLD3R9C20 :120V ELV/Triac Dimming                  | Blank :None            |
| LHLD3R9C20UE-DUN :120V-277V 0-10V/ELV/Triac Dimming | -EM :Emergency Backup* |

\* Above ceiling access required for EM option.

### 3" MICRO-CAST PINHOLE (500LM)

#### LRLD1319 10W LED

| FINISH                                   | COLOR TEMP           | OPTIONS           |
|------------------------------------------|----------------------|-------------------|
| LRLD1319BB :All Black                    | Blank :3000K (90CRI) | Blank :None       |
| LRLD1319BCO :Black Reflector/Copper Ring | -T27 :2700K (90CRI)  | -WL :Wet Location |
| LRLD1319BMO :Black Reflector/Mocha Ring  | -T35 :3500K (90CRI)  |                   |
| LRLD1319BN :Black Reflector/Natural Ring | -T40 :4000K (90CRI)  |                   |
| LRLD1319BW :Black Reflector/White Ring   |                      |                   |

Ordering example: LHLD3R9C20/LRLD1319BW