


4" IC Remodel LED Housing (14W) w/ 4" Deco Glass-Shield (Dome)

4" 14W (9 LED SERIES)

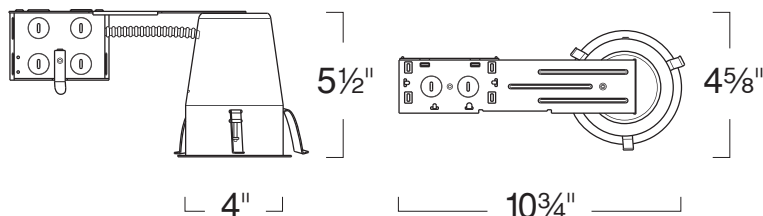

SPECIFICATION

Ceiling cut-out: 4 1/4"

Application: This energy efficient General Purpose recessed LED housing is perfect for low to medium height ceilings in residential and light commercial applications. A variety of trim styles, finishes and beam spreads are available to achieve a desired look.

Housing: Pre-wired housing adjusts up to a 1 1/4" ceiling thickness. Integral thermal protector to guard against improper lamping and installation. Trim is secured via positive retention friction clips.

Mounting: Housing suitable for existing or new construction installations, supplied with high tension remodeling clips, designed to secure the housing to an existing sheetrock ceiling for fast and easy installation.

Power Connection: LED heat sinked lamp module is replaceable via onboard quick exclusionary disconnect terminal. No tools required. Meets CA Title 24 Requirements and other standards restricting the use of Medium Base or Bi-Pin Sockets.

Driver: Electronic Direct Current U.L. Listed driver mounted away from LED Array for cool operation and end-of-life modularity. Comes standard with 120VAC input and available with optional 120V/277V universal voltage input.

Dimming: 'DIN' dimming option smoothly dims down to 5% of initial light output with flicker-free performance. Works with standard incandescent dimmers. Factory qualified for use with Lutron brand dimmers: S600PR, DVSCCL-153P & DV600PR as well as Leviton IP106-600W. Works with standard electronic low voltage (ELV) dimmers. Factory qualified for use with Lutron brand dimmers: SELV300P, DVELV-300P, MAELV-600 and NELV-450.

Emergency Option: Emergency LED Battery Back-up available, remotely mounted adjacent to housing by installer. When AC power fails, the device immediately switches to the emergency mode, operating the LEDs for a minimum of 90 minutes. Remote test switch, plate cover and junction box included. Optional Generator Transfer Device switches the driver to auxiliary generator power during the loss of normal AC power, (recommended for applications requiring individual circuit switching).

Junction Box: 16 gauge pre-wired galvanized steel Junction Box, 32 cubic-inch for a maximum of (8) #12 AWG wires. Furnished with (6) 3/4" and (4) Romex knock-outs. Strain clamps to install or remove covers for easy access and ground wire. Equipped with safety standard fitting for flex-conduit.

Insulation Contact: IC rated housing rated for direct contact with low to medium density loosefill blown and rolled insulation. For use with high density loosefill blown insulation, reduce rated lamp wattage accordingly (roughly %15-%20).

Airflow: Airtight option is designed to restrict air flow from room into plenums in compliance to the WSEC - Washington State Energy Code, (Less than 2.0 CFM -Cubic Feet per Minute). Complies to Title24 air flow requirements (Air-tight).

FEATURE:



Application: Combines the elements of a clear reflector and the soft, warm glow of light to illuminates walls and ceilings. The **Decorative Glass** LED trims add elegance to your design and make an architectural statement in any environment.

Gasket: Supplied with gasket to prevent light leakage and unsightly heat streaks on ceiling surface.

Mounting: Steel pressure springs mounted on trim to ensure positive retention inside housing.

Power Connection: LED heat sinked lamp module is replaceable via onboard quick exclusionary disconnect terminal. No tools required. Meets CA Title 24 Requirements and other standards restricting the use of Medium Base or Bi-Pin Sockets.

Lumen Maintenance: Minimum 35,000 hours L70 life based on ANSI TM-21 calculations from LM80 standardized test results.

Thermal Management: Effective thermal dissipation facilitated by integral cast-aluminum, finned heat sink design for maximum heat rejection to provide long LED life.

Color Temperature: Comes standard with 3,000K Warm White LED's binned according to ANSI C78 377A for color temperature and chromaticity ranges. Available with other color temperatures with ANSI binning of 4,000K. To order use "-T" Suffix followed by color temperature. Example 4000K= T40. Consult factory as extended lead times and minimum order quantities apply.

Warranty: Covered by a 3 Year Warranty to be free of defects in materials and craftsmanship. Recommended for applications where ambient temperatures do not exceed 35°C, installations exceeding this temperature will result in reduced LED lamp life and a voided warranty.

Certification: This LED product is certified as compliant with California's Title 24 Energy Code by the California Energy Commission.

Label: cETL Listed

Assembled in USA

4" IC REMODEL LED HOUSING (14W)

LHLDH4R 14W max LED

WATTAGE	DRIVER TYPE	OPTIONS
LHLDH4R14C35 :14W	Blank :120V	Blank :None
	-347-D10 :0-10V 10% Dimming	-EM :Emergency Back-Up (8W)
	-DIN :120V Incandescent/ ELV Dimming	-EM2 :Emergency Back-Up (14W)
	UE :120V/277V	
	UE-D10 :120V/277V (0-10V Dimming)	
	UE-DHL :Hilume Dimming (120V/277V)	

4" DECO GLASS-SHIELD (DOME)

LRLDH446 9x1.6W LED

Ordering example: LHLDH4R14C35UE-DHL/LRLDH446BB-FR

REFLECTOR FINISH	GLASS	BEAM SPREAD
LRLDH446BB :All Black	-FR :Frosted	Blank :60° Wide Flood
LRLDH446S :Satin Haze Reflector/White Ring		
LRLDH446W :All White		

LRLDH-14W-B61E: 4" Low Profile LED Trim

Lamp: (1) LED

Total Rated Fixture Lumen :591 Lm

Total Luminaire Efficacy :48 Lm/W

Luminous Diameter :3.48"

Color Rendering Index (CRI) :80 +

Color Temperature :3000K


Estimated Life :35,000 hrs. L70

Fixture Data

	LED Module Lumen	Fixture Lumen	Input Wattage
@ 3000K	650	591	14W
@ 4000K	650	609	14W

ZONAL LUMENS SUMMARY

Zone	Lumens	% Fixt
0 - 20	371.86	62.90
0 - 30	510.72	86.40
0 - 40	551.20	93.20
0 - 60	581.12	98.30
0 - 80	590.37	99.80
0 - 90	591.27	100.00
10 - 90	463.28	78.40
20 - 40	179.34	30.30
20 - 50	196.78	33.30
40 - 70	36.15	6.10
60 - 80	9.25	1.60
70 - 80	3.01	0.50
80 - 90	0.90	0.20

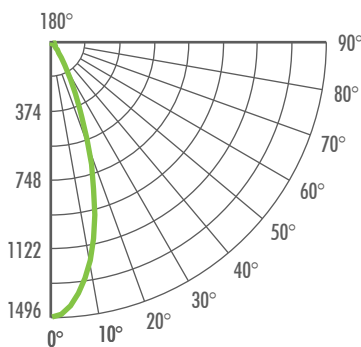

CANDELA TABULATION

CD./SQ.M

Angle	0
0.0	1496.095
2.0	1482.616
6.0	1372.692
12.0	1092.940
18.0	697.056
24.0	339.945
30.0	132.801
36.0	49.142
42.0	26.542
52.0	16.207
62.0	8.277
72.0	3.480
80.0	1.815

ZONAL LUMEN SUMMARY

LED	Height (ft.)	FC	Beam Diameter (ft.)
B25	10	20	3
	12	10	4
	14	6	4.5
	20	3	7
B45	8	16.8	3.6
	10	11.8	4
	12	8.1	4.5
	14	6	6
	16	4.7	7
B60	8	6	6
	10	4	7
	12	2.7	9

LUMINANCE DATA

CD./SQ.M

Angle	Avg. 0-Deg	Avg. 45-Deg	Avg. 90-Deg
45	5073	5073	5073
55	4020	4020	4020
65	2284	2284	2284
75	1796	1796	1796
85	1479	1479	1479

ZONAL LUMINANCE SUMMARY

CD./SQ.M

Zone	Lumens
0-10	127.99
10-20	243.87
20-30	138.85
30-40	40.49
40-50	17.44
50-60	12.47
60-70	6.24
70-80	3.01
80-90	0.90
90-100	0.00