



LHQLD15IC-FRM : 1.5" P-SERIES IC FRAME SQUARE NEW CONSTRUCTION FOR MICRO RECESSED LED DOWNLIGHT

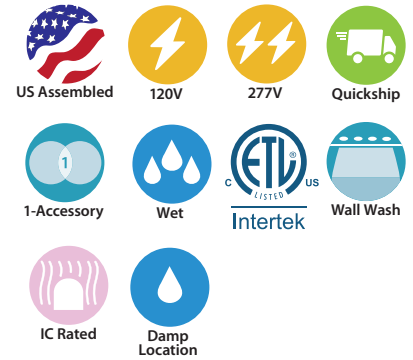

- IC Rated Housing (Loosefill Blown / Rolled Insulation)
- Airtight
- Frame includes (x2) 24" Adjustable Hanger Bars
- Hanger bars equipped with 3/4" serrated barbed studs

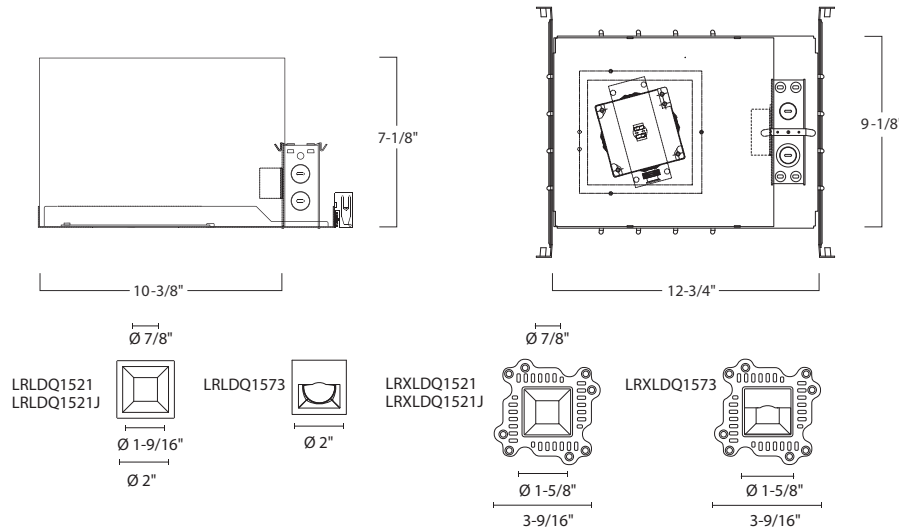

ORDERING : /LHQLD15IC-FRM

LHQLD15IC-FRM

Housing




Housing*


1.5" IC Rated Frame /LHQLD15IC-FRM

COMPATABILITY


LRLDQ1521
1.5" P-Series
Miniature Square
400lm/800lm/
1400lm Flanged
Downlight




LRLDQ1521J
1.5" P-Series
Miniature Square
400lm/800lm/
1400lm Flanged
Adjustable
Downlight




LRLDQ1573
1.5" P-Series
Miniature Square
400lm/800lm/
1400lm Flanged
Wallwash




LRXLDQ1521
1.5" P-Series
Miniature Square
400lm/800lm/
1400lm Trimless
Downlight



LRXLDQ1521J
1.5" P-Series
Miniature Square
400lm/800lm/
1400lm Trimless
Adjustable
Downlight



LRXLDQ1573
1.5" P-Series
Miniature Square
400lm/800lm/
1400lm Trimless
Wallwash



*Type IC Frame and Fire-Rated Frame only compatible with LD5INTJBX with -CO20-HO (600lm, 8W)

SPECIFICATION

Application

For locations where Insulation is used above ceiling, the frame allows for support for the downlight in weak ceilings such as tiles and locations where a rough-in frame is desired for new construction applications.

Housing

.05" baked enamel 1-piece drawn steel housing adjusts up to 1" ceiling thickness. Integral thermal protector to guard against improper lamping and installation. Trim is secured with torsion wing springs.

Mounting

Housing suitable for new construction and remodel installations, supplied with (2) 24" adjustable hanger bars. Hanger bars equipped with nail-less install 3/4" serrated barbed studs and with captive nails, for faster and easier secure mounting in wood joists. Set-screws lock into position and prevent shifting after installation. Earthquake structural cable compatible for drop panel ceiling or any other mounting that requires direct support from structural ceilings.

Insulation Contact

IC rated housing rated for direct contact with low to medium density loosefill blown and rolled insulation. For use with high density loosefill blown insulation, reduce rated lamp wattage accordingly (roughly 15%-20%).