


LHQLD25IC-FRM - NEW CONSTRUCTION IC FRAME (SQUARE) 2.5" MINI-ARC LED

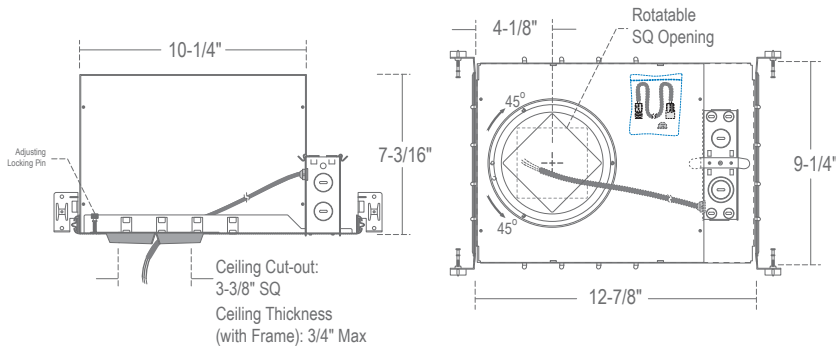

SPECIFICATION

LED

Application: Recessed downlight frame height ceilings. A variety of trims, compatible styles and finishes are available to achieve the desired décor and illumination.

Housing: .05" baked enamel 1-piece drawn steel housing adjusts up to 3/4" ceiling thickness. Integral thermal protector to guard against improper lamping and installation. Trim is secured with torsion wing springs. Housing has $\pm 45^\circ$ rotatable square opening for reflector.

Mounting: Housing suitable for new construction and remodel installations, supplied with (2) 24" adjustable hanger bars. Hanger bars equipped with nail-less install 3/4" serrated barbed studs and with captive nails, for faster and easier secure mounting in wood joists. Set-screws lock into position and prevent shifting after installation. Earthquake structural cable compatible for drop panel ceiling or any other mounting that requires direct support from structural ceilings.

Insulation Contact: IC rated housing rated for direct contact with low to medium density loosefill blown and rolled insulation. For use with high density loosefill blown insulation, reduce rated lamp wattage accordingly (roughly %15-%20).

Available with an Integral Emergency Switch. Consult Factory

COMPATIBILITY*

 LRLDQ2521 2.5" RECESSED LED 1000LM/1400LM SQUARE DOWNLIGHT	 LRLDQ2572 2.5" RECESSED LED 1000LM/1400LM SQUARE WALL WASH	 LRLDQ2573 2.5" RECESSED LED 750LM/1200LM SQUARE ZERODARK SPOT/W.WASH
 LRXLDQ2521 2.5" RECESSED LED 1000LM/1400LM SQUARE TRIMLESS	 LRXLDQ2572 2.5" RECESSED LED 1000LM/1400LM SQUARE WALL WASH TRIMLESS	 LRXLDQ2573 2.5" RECESSED LED 750LM/1200LM SQUARE ZD SPOT/WW TRIMLESS
 LRLDQ2521J 2.5" RECESSED LED 1000LM/1400LM SQUARE 25° ADJUSTABLE	 LRLDQ2571 2.5" RECESSED LED 1000LM/1400LM SQUARE 40° ADJUSTABLE	 LRXLDQ2571 2.5" RECESSED LED 1000LM/1400LM SQ 40° ADJ. TRIMLESS
 LRXLDQ2521J 2.5" RECESSED LED 1000LM/1400LM SQ 25° ADJ. TRIMLESS		

Note: Wattage limitations on compatible items must be met.

*NOTE: The (-TWD) Warming Dimming option is not compatible with the LHLD25IC-FRM when used with 2.5" Recessed fixtures.