

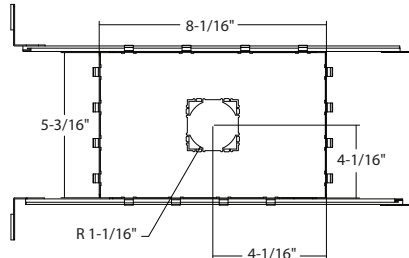


LHXLD15-FRM : 1.5" P-SERIES

NEW CONSTRUCTION FRAME (TRIMLESS) ROUND/SQUARE FOR MICRO RECESSED LED DOWNLIGHT

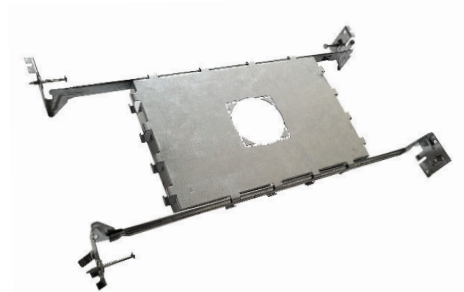

- New Construction Frame for new construction applications
- Lightweight-Durable, Galvanized Steel Frames
- Frame includes (x2) 24" Adjustable Hanger Bars
- Hanger bars equipped with 3/4" serrated barbed studs

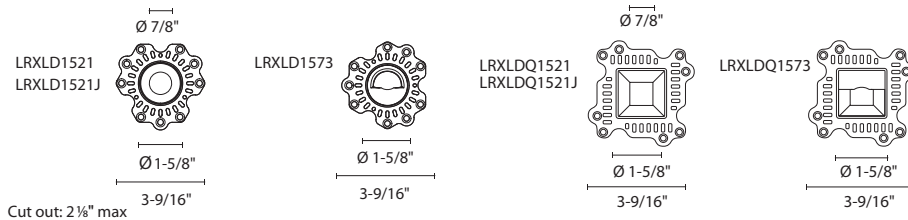

ORDERING : /LHXLD15-FRM

LHXLD15-FRM

Housing

Housing

1.5" New Construction /LHXLD15-FRM Frame (Trimless)

COMPATABILITY

LRXLD1521
1.5" P-Series
Miniature Round
400lm/800lm/
1400lm Trimless
Downlight







LRXLD1521J
1.5" P-Series
Miniature Round
400lm/800lm/
1400lm Trimless
Adjustable
Downlight

LRXLD1573
1.5" P-Series
Miniature Round
400lm/800lm/
1400lm Trimless
Wallwash

LRXLDQ1521
1.5" P-Series
Miniature Square
400lm/800lm/
1400lm Trimless
Downlight

LRXLDQ1521J
1.5" P-Series
Miniature Square
400lm/800lm/
1400lm Trimless
Adjustable
Downlight

LRXLDQ1573
1.5" P-Series
Miniature Square
400lm/800lm/
1400lm Trimless
Wallwash





LHXLD15-FRM : 1.5" **P**·SERIES

NEW CONSTRUCTION FRAME (TRIMLESS) ROUND/SQUARE FOR MICRO RECESSED LED DOWNLIGHT

SPECIFICATION

Application

Although not required, the frame allows for support for the downlight in weak ceilings such as tiles and locations where a rough-in frame is desired for new construction applications.

Mounting

Housing suitable for new construction installations. Adjusts up to 3/4" ceiling thickness. Supplied with (2) 24" adjustable hanger bars. Hanger bars equipped with nail-less install 3/4" serrated barbed studs and with captive nails, for faster and easier secure mounting in wood joists. Set-screws lock into position and prevent shifting after installation. Trim is secured via positive retention friction clips.