


LR1221 - MR16 REFLECTOR

2" LOW VOLTAGE DOWNLIGHT DIE-CAST TRIMS

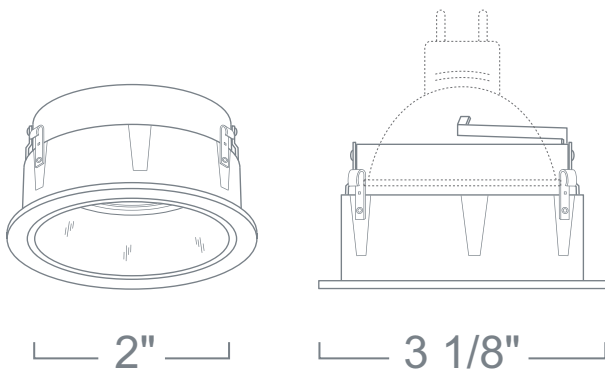

SPECIFICATION

12V/120V 50W MR16

Application: Perfect solution for low-profile design in hard-to-light spaces.

Gasket: Supplied with gasket to prevent light leakage and unsightly heat streaks on ceiling surface.

Lens Inclusion: Clear glass protective safety lens included in packaging.

Mounting: Steel pressure springs mounted on trim to ensure positive retention inside housing.

Finish: Spun Aluminum Reflector/ Die-Cast Aluminum Trim Ring Available in All White, Black Reflector/ White Ring, Clear Reflector w/White Ring, All Natural Metal, All Copper and Satin Reflector/Natural Ring.

Accessories: Takes up to (3) 2" Media.

Label: cETL Listed

COMPATIBILITY

 LH2R REMODEL	 LH1299IC NEW CONSTRUCTION (IC)	 LH1299R REMODEL
 LHR1299 REMOTE HOUSING - NO TRANSFORMER	 LH1299 NEW CONSTRUCTION (NON-IC)	 LH2 NEW CONSTRUCTION

Note: Wattage limitations on compatible items must be met.

FEATURE:



ORDERING EXAMPLE : LR1221B-WL

LR1221	FINISH	RATING	ACCESSORIES
LR1221	W :All White	Blank :Damp Location	/L38 :Clear Lens
	B :Black Reflector/ White Ring	-WL :Wet Location	/L40 :Yellow Lens
	C :Clear Reflector w/White Ring		/L41 :Blue Lens
	N :All Natural Metal		/L42 :Amber Lens
	CO :All Copper		/L43 :Green Lens
	SN :Satin Reflector/Natural Ring		/L44 :Daylight Blue Lens
			/L48 :Lens with Internal Louver Filter
			/L49 :Frosted Soft Focus
			/L50UV :UltraViolet Filter
			/L53 :Micro - Prismatic Spread Lens
			/L55 :Linear Spread Lens
			/LL16B :Black
			/LL16C :Clear

ID#: 1149