


LR1321 - REFLECTOR

3" LOW VOLTAGE TRIMS

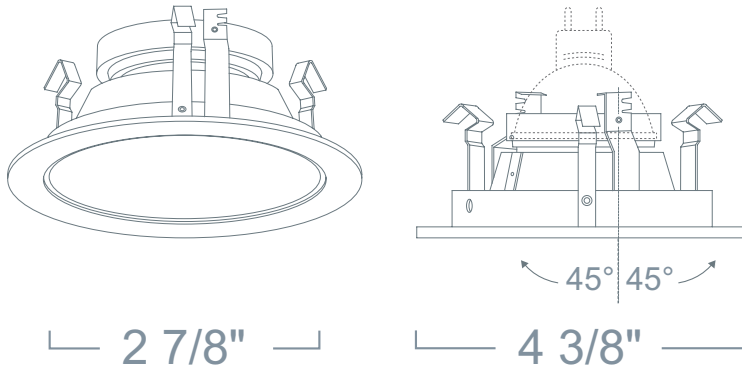

SPECIFICATION

12V/120V 50W MR16

Application: Used for both general and accent lighting with excellent results. Allows for the precision lighting of miniature lamps in small areas such as niches and casework. This produces an environment with powerful illumination, yet without drawing attention to its source.

Gasket: Supplied with gasket to prevent light leakage and unsightly heat streaks on ceiling surface.

Lens Inclusion: Clear glass protective safety lens included in packaging.

Mounting: Steel pressure springs mounted on trim to ensure positive retention inside housing.

Reflector Ring Finish: Spun Aluminum Reflector Available in Black Reflector/White Ring, All Black, Clear Reflector/White Ring, All Clear, All Copper, All Natural and All White.

COMPATIBILITY

 LH1399R REMODEL HOUSING	 LH1399 STANDARD HOUSING	 LH3IC-GU10 IC HOUSING
 LSH1399IC SHALLOW IC HOUSING	 LSH1399RE SHALLOW REMODEL HOUSING	 LSH1399 SHALLOW HOUSING
 LH1399IC IC DOUBLE WALL HOUSING	 LH3A-GU10 STANDARD HOUSING	 LH3RA-GU10 REMODEL HOUSING

Note: Wattage limitations on compatible items must be met.

FEATURE:



ORDERING EXAMPLE : LR1321W

LR1321	REFLECTOR RING FINISH	ACCESSORIES
LR1321	B :Black Reflector/White Ring	/L38 :Clear Lens
	BB :All Black	/L40 :Yellow Lens
	C :Clear Reflector/White Ring	/L41 :Blue Lens
	CC :All Clear	/L42 :Amber Lens
	CO :All Copper	/L43 :Green Lens
	N :All Natural	/L44 :Daylight Blue Lens
	W :All White	/L48 :Lens with Internal Louver Filter
		/L49 :Frosted Soft Focus
		/L50UV :UltraViolet Filter
		/L53 :Micro - Prismatic Spread Lens
		/L55 :Linear Spread Lens
		/LL16B :Black
		/LL16C :Clear

* Comes standard with a matching ring finish. Use "W" for White Ring.

ID# : 262