



LR1342 - 3" MR16 LENSES 3" LOW VOLTAGE TRIMS

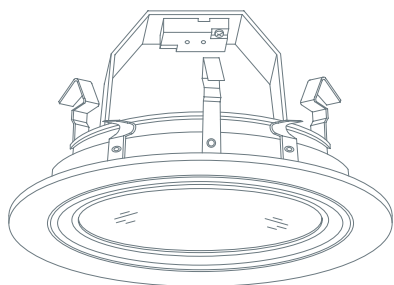

└ 2 3/8" ┘

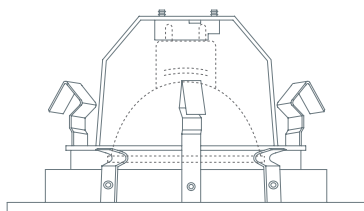

└ 4 3/8" ┘



SPECIFICATION

120V/12V 50W Max MR16
GU5.3

Application: These attractive glass trims give class and a touch of elegance to a space that requires optimum performance. Fully lensed trims adhere to extremely damp locations, such as saunas and shower stalls. Utilizing a frosted lens can soften the light output.

Gasket: Supplied with gasket to prevent light leakage and unsightly heat streaks on ceiling surface.

Mounting: Steel pressure springs mounted on trim to ensure positive retention inside housing.

Ring Finish: Available in White and Black.

Label: UL Listed, cETL Listed

COMPATIBILITY



LH3A-GU10

STANDARD HOUSING



LH3RA-GU10

REMODEL HOUSING

Note: Wattage limitations on compatible items must be met.

FEATURE:



ORDERING EXAMPLE : LR1342W-01

LR1342	RING FINISH	RATING
LR1342	W-01 :White	Blank :Damp Location
	B-01 :Black	-WL :Wet Location

ID#: 3129