


LR1409 - ADJUSTABLE GIMBAL 4" LOW VOLTAGE TRIMS

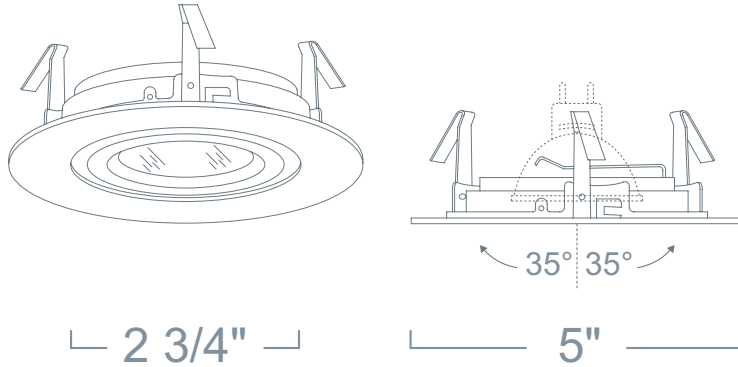

SPECIFICATION

12V/120V/HID 75W Max MR16

Application: These **adjustable** fixtures provide flexibility and versatility by doubling as both a downlight and as an accent light. These trims come with adjustable lamp holders and have larger degrees of rotation resulting in both visual style and practical ergonomics.

Gasket: Supplied with gasket to prevent light leakage and unsightly heat streaks on ceiling surface.

Lens Inclusion: Clear glass protective safety lens included in packaging.

Mounting: Steel pressure springs mounted on trim to ensure positive retention inside housing.

Finish: Deep-Drawn Aluminum Construction/ Die-Formed Construction Available in White, Black, Natural and All Copper.

COMPATIBILITY

 LH99RA-GU10 REMODEL	 LH99MHR-GX10 REMODEL	 LSH1499R SHALLOW REMODEL HOUSING
 LH99ICA-GU10 IC HOUSING	 LSH1499 SHALLOW HOUSING	 LH99A-GU10 NEW CONSTRUCTION
 LH1499R REMODEL HOUSING 120V/277V	 LH99MH-GX10 NEW CONSTRUCTION	 LSH1499IC SHALLOW IC HOUSING
 LH1499 STANDARD HOUSING	 LH1499IC IC DOUBLE WALL HOUSING	

Note: Wattage limitations on compatible items must be met.

FEATURE:



ORDERING EXAMPLE : LR1409N

LR1409	FINISH	ACCESSORIES
LR1409	W :White	/L38 :Clear Lens
	B :Black	/L40 :Yellow Lens
	N :Natural	/L41 :Blue Lens
	CO :All Copper	/L42 :Amber Lens
		/L43 :Green Lens
		/L44 :Daylight Blue Lens
		/L48 :Lens with Internal Louver Filter
		/L49 :Frosted Soft Focus
		/L50UV :UltraViolet Filter
		/L53 :Micro - Prismatic Spread Lens
		/L55 :Linear Spread Lens
		/LL16B :Black
		/LL16C :Clear

* Comes standard with a matching ring finish. Use "W" for White Ring.

ID #: 200