


LR2LH19 - 2" 450LM LED PIN-HOLE 2" MINI-ARC LED

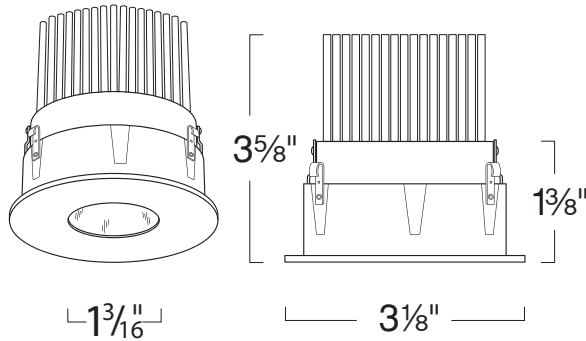

SPECIFICATION

10W LED

Application: Energy efficient miniature recessed trim for commercial and high-end residential installations. Easily accent objects and illuminates walls to enhance the mood in a room and give a more spacious and dramatic feel. Trim ring made of heavy duty die-cast construction.

Gasket: Supplied with gasket to prevent light leakage and unsightly heat streaks on ceiling surface.

Mounting: Steel pressure springs mounted on trim to ensure positive retention inside housing.

Lumen Maintenance: Minimum 50,000 hours L70 life based on ANSI TM-21 calculations from LM80 standardized test results.

Thermal Management: Effective thermal dissipation facilitated by integral cast-aluminum, heat sink design for maximum heat rejection to provide long LED life.

Power Connection: LED lamp array is replaceable via on board quick disconnect terminal. Meets CA Title 24 Requirements and other standards restricting the use of Medium Base or Bi-Pin Sockets.

Warranty: Covered by a 5 Year Warranty to be free of defects in materials and craftsmanship. Recommended for applications where ambient temperatures do not exceed 35°C, installations exceeding this temperature will result in reduced LED lamp life and a voided warranty.

Safety Labels: Suitable for dry and damp locations. NYC approved: Calendar #41937

Finish: Available in White Pinhole/Black Reflector, Natural Metal Pinhole/Black Reflector, Black Pinhole/Black Reflector, Copper Pinhole/Black Reflector and Mocha Pinhole/Black Reflector.

LED: Available in 3000K, 3000K, 90CRI, 3000K, 97CRI, 1700K*, 2500K*, 2700K*, 2700K 90+ CRI, 2700K, 97CRI, 3500K and 4000K. LEDs binned to within 3-Step MacAdam Ellipses (SDCM) and surpasses the ANSI C78 377A standard for color deviation.

Label: cETL Listed

Made in USA

COMPATIBILITY



LHBLD2
2" 10W LED NEW
CONSTRUCTION



LHBLD2R
2" 10W REMODEL
HOUSING



QVP25W
2" GOOF RING/TRIM

Note: Wattage limitations on compatible items must be met.

LED Details:

10W 600+ Delivered Lumens

Color Rendering Index (CRI): 80

Color Temperature: 3,000K

Lamp Equivalents: 75W A19, 50W PAR20 FL, 50W MR16 FL

Benefit:

- New High Output 10W LED
- LED binned to within 3-Step MacAdam Ellipses(SDCM)
- Specification grade 90CRI Option
- Available Damp Location option

FEATURE:



ORDERING EXAMPLE : LR2LH19CO-T27-C90

LR2LH19	FINISH	LED
LR2LH19	W :White Pinhole/Black Reflector	Blank :3000K
	B :Black Pinhole/Black Reflector	-C90 :3000K, 90CRI
	N :Natural Metal Pinhole/Black Reflector	-C97 :3000K, 97CRI
	CO :Copper Pinhole/Black Reflector	-T17 :1700K*
	MO :Mocha Pinhole/Black Reflector	-T25 :2500K*
		-T27 :2700K*
		-T27-C90 :2700K 90+ CRI*
		-T27-C97 :2700K, 97CRI*
		-T35 :3500K
		-T40 :4000K

* Extended Lead Time may apply. Consult Factory.