


LR2LH67 - 2" 600LM LED PULL DOWN 2" MINI-ARC LED

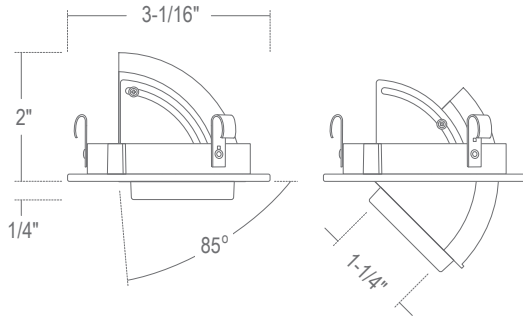

SPECIFICATION

120V 10W LED

Application: High-output miniature architectural-grade LED gimbal trim for commercial and high-end residential applications. Easily accent objects and illuminate walls to enhance the mood and ambience of a space. Trim ring constructed of heavy-duty die-cast aluminum.

Optics: Interchangeable optics allow polycarbonate lens to be changed in the field to modify beam spread. No tools required."

Mounting: Steel pressure springs mounted on trim to ensure positive retention inside housing.

Power Connection: LED lamp array is replaceable via on board quick disconnect terminal. Meets CA Title 24 Requirements and other standards restricting the use of Medium Base or Bi-Pin Sockets.

Lumen Maintenance: Minimum 50,000 hours L70 life based on ANSI TM-21 calculations from LM80 standardized test results.

Thermal Management: Effective thermal dissipation facilitated by integral cast-aluminum, heat sink design for maximum heat rejection to provide long LED life.

Warranty: Covered by a 5 Year Warranty to be free of defects in materials and craftsmanship. Recommended for applications where ambient temperatures do not exceed 35°C, installations exceeding this temperature will result in reduced LED lamp life and a voided warranty.

Safety Labels: Suitable for dry and damp locations. NYC approved: Calendar #41937

Reflector Finish: Available in White, Black and Natural.

Beam Spread: Available in 45 Narrow Flood and 60 Wide Flood.

LED: Available in 3000K, 3000K, 90CRI, 3000K, 97CRI, 1700K*, 2500K*, 2700K*, 2700K, 90+ CRI*, 2700K, 97CRI*, 3500K and 4000K.

Label: cETL Listed

Made in USA

COMPATIBILITY



LHBLD2
2" 10W LED NEW
CONSTRUCTION



LHBLD2R
2" 10W REMODEL
HOUSING



QVP25W
2" GOOF RING/TRIM

Note: Wattage limitations on compatible items must be met.

LED Details:

10W 600+ Lumen Package

Color Rendering Index (CRI): 80 Standard, 90+ Option
Color Temperature: 3,000K & 4,000K
Lamp Equivalents: 50W MR16

Benefit:

- New High Output 10W LED
- LED binned to within 3-Step MacAdam Ellipses (SDCM)
- Specification grade 90CRI Option
- Singular Optic LED
- Optics changeable in the field
- Illuminates like 50W MR16
- Smallest Adjustable Pull Down LED Trim
- Functions as Downlight, Wall Wash & Accent
- Tilts 85°, rotates 360°
- 45° and 60° beam spreads

2020.06.22

FEATURE:



ORDERING EXAMPLE : LR2LH67W-C90

LR2LH67	REFLECTOR FINISH	BEAM SPREAD	LED
LR2LH67	W :White	Blank :45 Narrow Flood	Blank :3000K
	B :Black	-B60 :60 Wide Flood	-C90 :3000K, 90CRI
	N :Natural		-C97 :3000K, 97CRI
			-T17 :1700K*
			-T25 :2500K*
			-T27 :2700K*
			-T27-C90 :2700K, 90+ CRI*
			-T27-C97 :2700K, 97CRI*
			-T35 :3500K
			-T40 :4000K

* Extended Lead Time may apply. Consult Factory.