
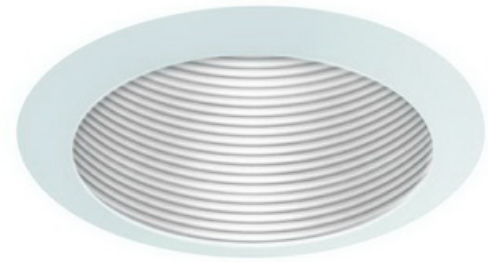


LR543 - METAL BAFFLE 5" LINE VOLTAGE TRIMS

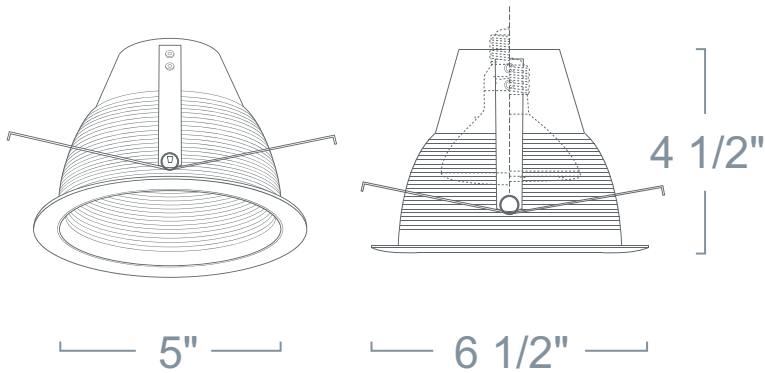

SPECIFICATION

120V/CFL 75W Max PAR30/R30 MED E26

Application: Used for general ambient lighting. This traditional look of the baffle trim creates proper lighting that can be used in residential, retail, and light commercial applications.

Mounting: Steel pressure springs mounted on trim to ensure positive retention inside housing.

Baffle Finish: Die-formed aluminum baffle ridges eliminate stray light. Available in White and Black.

Ring Finish: Die-Formed Aluminum Trim Ring Only available in White.

Label: UL Listed, cETL Listed

COMPATIBILITY

 LH51 STANDARD HOUSING (ELECTRONIC)	 LH51 REMODEL HOUSING (ELECTRONIC)	 LH5 STANDARD NEW CONSTRUCTION HOUSING
 LH51 IC HOUSING (ELECTRONIC)	 LH51CA-GU24 5" BRACKET MOUNTED GU24 HOUSING	 LH5R STANDARD REMODEL HOUSING

Note: Wattage limitations on compatible items must be met.

FEATURE:



ORDERING EXAMPLE : LR543W

LR543	BAFFLE FINISH	RING FINISH	RATING
LR543	W :White B :Black	Blank :White	Blank :Damp Location

ID#: 98