


LR606 - CROSS BLADE REFLECTOR

6" COMMERCIAL VERTICAL COMPACT FLUORESCENT TRIMS

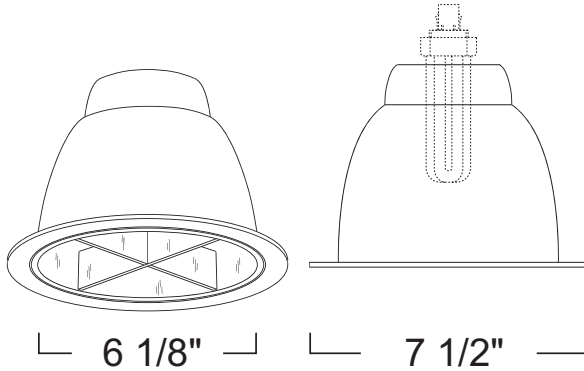

SPECIFICATION

CFL 42W TTT
26W DTT

Application: Architectural-grade recessed downlight reflector for medium to high ceilings in commercial and architectural installations. Reflector designed for minimal glare from lamp without sacrificing lumen output.

Mounting: Pre-punched key holes allow mounting of socket cap assembly for housing, with vertically adjustable socket cap. Reflector held in place with 6 steel pressure springs mounted on housing frame.

Warranty: Covered by a 3 Year Warranty to be free of defects in materials and craftsmanship.

Reflector Finish: One piece spun low-iridescent aluminum reflector with seem less self-flanged ring Available in Clear Reflector/Clear Flange, Clear Reflector/White Flange and Satin Reflector/Satin Flange.

Label: UL Listed, cETL Listed

Assembled in USA

COMPATIBILITY

 LVH6 6" LIGHT COMMERCIAL HOUSING (ELECTRONIC)	 LVH6R1 6" REMODEL ARCHITECTURAL HOUSING (NON-IC)	 LVH61 ARCHITECTURAL HOUSING (NON-IC)
 LVH61 ARCHITECTURAL HOUSING (IC)		

Note: Wattage limitations on compatible items must be met.

FEATURE:



ORDERING EXAMPLE : LR606CWF

LR606 REFLECTOR FINISH

LR606 CCF :Clear Reflector/Clear Flange
CWF :Clear Reflector/White Flange
SSF :Satin Reflector/Satin Flange

ID#: 396