


LR878 - CROSS BLADE REFLECTOR

8" INCANDESCENT TRIMS

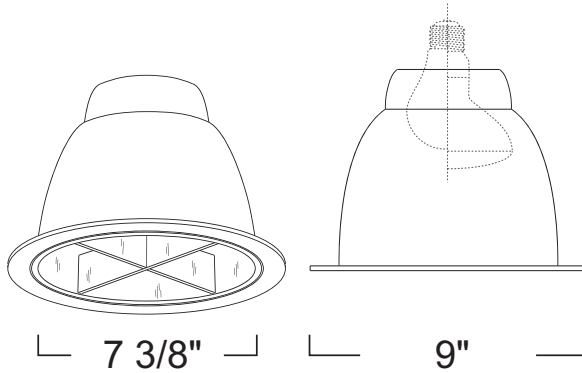

SPECIFICATION

120V 250W Max PAR38/ A19/ A21
MED E26

Application: Architectural-grade recessed downlight reflector in high ceilings for commercial and architectural installations. Reflector designed for minimal glare from lamp without sacrificing lumen output.

Mounting: Pre-punched key holes allow mounting of socket cap assembly for housing, with vertically adjustable socket cap. Reflector held in place with 6 steel pressure springs mounted on housing frame.

Warranty: Covered by a 3 Year Warranty to be free of defects in materials and craftsmanship.

Reflector Finish: One piece spun low-iridescent aluminum reflector with seem less self-flanged ring Available in Clear Reflector/Clear Finish, Clear Reflector/Natural Flange, Clear Reflector/White Finish, Satin Haze Reflector/Satin Haze Flange and White Reflector/White Flange.

Label: UL Listed, cETL Listed

Assembled in USA

COMPATIBILITY



LH800

**ARCHITECTURAL
HOUSING**



LH800R

**REMODEL
ARCHITECTURAL
HOUSING**



LH880

**LIGHT COMMERCIAL
HOUSING**

Note: Wattage limitations on compatible items must be met.

FEATURE:



ORDERING EXAMPLE : LR878SSF

LR878

REFLECTOR FINISH

LR878	CCF	:Clear Reflector/Clear Finish
	CNF	:Clear Reflector/Natural Flange
	CWF	:Clear Reflector/White Finish
	SSF	:Satin Haze Reflector/Satin Haze Flange
	WWF	:White Reflector/White Flange

ID#: 568