


LRELD467 - 4" 700LM ADJUSTABLE PULL DOWN (DIMMABLE) 4" LED

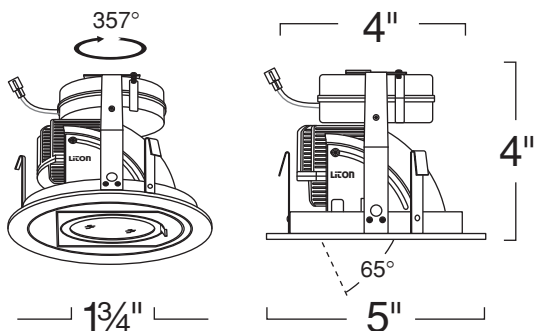

SPECIFICATION

LED 12W/16W

Application: This Adjustable LED Pull Down Trim with a Orange Push-In Quick Connector Base can be used with LITON new construction and remodel housings. The elbow design provides full horizontal and vertical adjustability and allows it to function as an accent light and a downlight. Lumen output is comparable to a 75W MR16 Lamp.

Mounting: Mounts into standard 4" General Purpose Recessed housing cans with Steel pressure springs mounted on trim to ensure positive retention inside housing. Alternate mounting methods available, consult factory.

Power Connection: Comes standard with socket mounted to top of fixture. Meets CA Title 24 Requirements and other standards restricting the use of Medium Base or Bi-Pin Sockets.

Lumen Maintenance: Minimum 35,000 hours L70 life based on ANSI TM-21 calculations from LM80 standardized test results.

Thermal Management: Effective thermal dissipation facilitated by integral cast-aluminum, finned heat sink design for maximum heat rejection to provide long LED life.

Driver: Electronic Direct Current driver mounted on fixture. Comes standard with Incandescent dimming. Smoothly dims down to 5% with standard Incandescent and Low Voltage dimmers.

Color Temperature: Comes with 3000K Warm White LED's binned according to ANSI C78 377A for color temperature and chromaticity ranges. Available with other color temperatures with ANSI binning between 2700K and 6500K. To order use "-T" Suffix followed by color temperature, consult factory as extended lead times and minimum order quantities apply. Example: 4000K = -T40.

Safety Labels: ETL/CETL listed. Suitable for damp locations. NYC approved: Calendar#41937.

Warranty: Covered by a 3 Year Warranty to be free of defects in materials and craftsmanship. Recommended for applications where ambient temperatures do not exceed 35°C, installations exceeding this temperature will result in reduced LED lamp life and a voided warranty.

Finish: Available in Black, Natural Metal and White.

Beam Spread: Available in Flood, Spot and Wide Flood.

COMPATIBILITY



LH99ICA-QC

4" NEW CONSTRUCTION
(2-PIN ORANGE CONNECTOR)



LH99RICA-QC

4" REMODELING HOUSING
(2-PIN ORANGE CONNECTOR)



LSHFR99-QC

4" IC 2HR FIRE-RATED
LED HOUSING (SHALLOW)

Note: Wattage limitations on compatible items must be met.

LED Details:

12W 700 Lumen Package
Color Rendering Index (CRI)²: 80
Color Temperature: 3000K
Lamp Equivalent: 75W MR16

16W 900 Lumen Package
Color Rendering Index (CRI)²: 85
Color Temperature: 3000K
Lamp Equivalent: 75W R40

Benefit:

- Highly versatile: for new construction, remodel and retrofit applications
- Highly adjustable: 65° vertical, 358° Horizontal
- Fully enclosed lamp eliminates glare from behind and sides.
- Single LED light source
- Color/CRI: 3000K, 90CRI Min.

FEATURE:



ORDERING EXAMPLE : LRELD467B-B45

LRELD467	FINISH	BEAM SPREAD	COLOR TEMP OPTIONS	LUMENS	ADAPTER
LRELD467	B :Black	-B40 :Flood	Blank :3000K	Blank :700 Lumen (12W)	Blank :None
	N :Natural Metal	-B60 :Wide Flood	-T27 :2700K	-L10 :900 Lumen (16W)	/SQG4-MED :Med Base
	W :White		-T35 :3500K		
			-T40 :4000K		