


LRELD488W - ADJUSTABLE GIMBAL (600LM)

4" LED

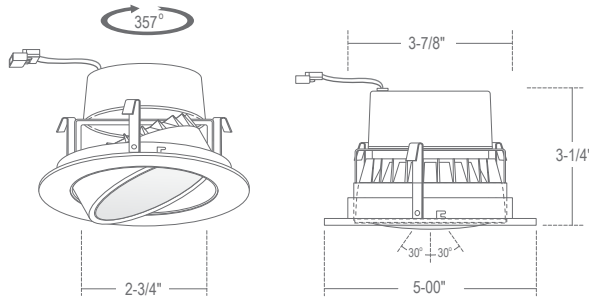

SPECIFICATION

120V LED

Application: This Adjustable LED Pull Down Trim can be used with LITON new construction and remodel housings with a Orange Push-In Quick Connector Base and is retrofittable for use with line voltage housings.

Mounting: Mounts into standard 4" General Purpose Recessed housing cans with Steel pressure springs mounted on trim to ensure positive retention inside housing.

Power Connection: Comes standard with socket mounted to top of fixture. Meets CA Title 24 Requirements and other standards restricting the use of Medium Base or Bi-Pin Sockets.

Lumen Maintenance: Minimum 35,000 hours L70 life based on ANSI TM-21 calculations from LM80 standardized test results.

Thermal Management: Effective thermal dissipation facilitated by integral cast-aluminum, finned heat sink design for maximum heat rejection to provide long LED life.

Driver: Electronic Direct Current driver mounted on fixture. Comes standard with Incandescent dimming. Smoothly dims down to 5% with standard Incandescent and Low Voltage dimmers.

Dimming: Smoothly dims down to 5% of initial light output with flicker-free performance. Works with standard incandescent dimmers. Factory qualified for use with Lutron brand dimmers: S600PR, DVSCCL-153P & DV600PR as well as Leviton IP106-600W. Works with standard electronic low voltage (ELV) dimmers. Factory qualified for use with Lutron brand dimmers: SELV300P, DVELV-300P, MAELV-600 and NELV-450.

Color Temperature: Comes with 3000K Warm White LED's binned according to ANSI C78 377A for color temperature and chromaticity ranges.

Safety Labels: ETL/CETL listed. Suitable for damp locations. NYC approved: Calendar#41937. High Efficacy Luminaire Certified by the California Energy Commission (CEC) as Title 24 / JA8 Compliant.

Warranty: Covered by a 3 Year Warranty to be free of defects in materials and craftsmanship. Recommended for applications where ambient temperatures do not exceed 35°C, installations exceeding this temperature will result in reduced LED lamp life and a voided warranty.

COMPATIBILITY

 LH99ICA-QC 4" NEW CONSTRUCTION (2-PIN ORANGE CONNECTOR)	 LH99RICA-QC 4" REMODELING HOUSING (2-PIN ORANGE CONNECTOR)	 LSH99ICA-QC NEW CONSTRUCTION SHALLOW HOUSING
 LH99 STANDARD E26 HOUSING	 LH99R REMODEL E26 HOUSING	 LSH99-QC 4" IC 2HR FIRE-RATED LED HOUSING (SHALLOW)

Note: Wattage limitations on compatible items must be met.

LED Details:

9W 600 Lumen Package
Color Rendering Index (CRI)²: 90
Color Temperature: 3000K
Lamp Equivalent: 50W R/PAR30

Benefit:

- Highly versatile: for new construction, remodel and retrofit applications
- 9 Watts, 600 Lumens
- 90 CRI Standard

Title 24/JA8 Compliant

- LRELD488W
- LRELD488W_-T27
- LRELD488W_-T40

FEATURE:



LRELD488W	COLOR TEMP OPTIONS	ADAPTER
LRELD488W	Blank :3000K	Blank :None
	-T27 :2700K*	/SQG4-MED :Med Base
	-T40 :4000K*	

* Special Order

ORDERING EXAMPLE : LRELD488W