


LRLD1419 - 4" PINHOLE W/PHENOLIC BAFFLE (500LM) 4" LED TRIMS

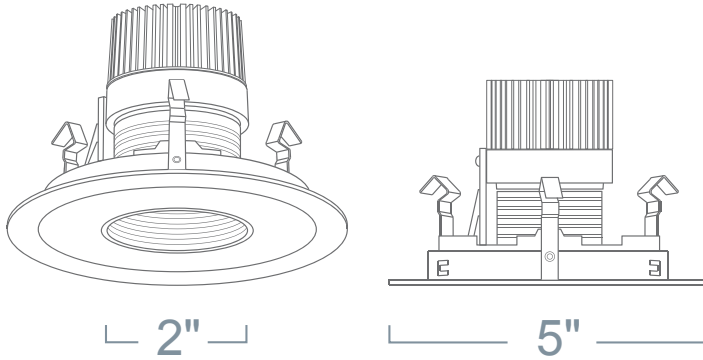

SPECIFICATION

10W LED

Application: These narrow aperture beams allow a defined location to be lit without affecting the surrounding surfaces while concealing the lamp image and providing a consistent ceiling appearance. The smaller the aperture the more confined the illumination.

Pinhole trims provide the type of precise illumination needed for artwork such as paintings and statues. They are also ideal for cozy environments like restaurants and living spaces where glare-free illumination is desired. Aside from accent lighting, they can also be utilized for task lighting applications such as above tables, workspace, cabinetry, and other locations where a directed beam is desired.

Power Connection: LED heat sinked lamp module is replaceable via onboard quick exclusionary disconnect terminal. No tools required. Meets CA Title 24 Requirements and other standards restricting the use of Medium Base or Bi-Pin Sockets.

Lumen Maintenance: Minimum 35,000 hours L70 life based on ANSI TM-21 calculations from LM80 standardized test results.


Thermal Management: Effective thermal dissipation facilitated by integral cast-aluminum, finned heat sink design for maximum heat rejection to provide long LED life.

Warranty: Covered by a 3 Year Warranty to be free of defects in materials and craftsmanship. Recommended for applications where ambient temperatures do not exceed 35°C, installations exceeding this temperature will result in reduced LED lamp life and a voided warranty.

Safety Labels: ETL/cETL listed. Suitable for damp locations only.

Finish: Available in All Mocha, All White, Black Reflector/Black Ring and Black Reflector/Black White.

Color Temp: Available in 2700K (90CRI), 3000K (90CRI), 3500K (90CRI) and 4000K (90CRI). LEDs binned to within 3-Step MacAdam Ellipses (SDCM) and surpasses the ANSI C78 377A standard for color deviation.

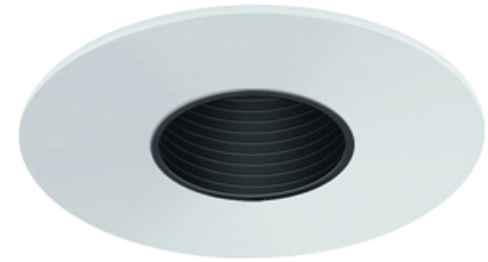

COMPATIBILITY



[LHFRLD49C20](#)

4" FIRE-RATED LED HOUSING (700LM/1000LM)



[LHLD49C20](#)

4" LED HOUSING (700LM/1000LM)



[LHLD49C20](#)

4" LED REMODEL HOUSING (700LM/1000LM)

Note: Wattage limitations on compatible items must be met.

LED Details:

10W 500 + Lumens Delivered
Color Rendering Index (CRI): 90
Color Temperature: 3,000K
Lamp Equivalents: 50W MR16

Benefit:

- Up to 500 Lumens Delivered!
- Budget Friendly, specification quality performance
- Small aperture for hard to light spaces
- Singular diode, no multiple LEDs
- High quality die-cast construction
- 90CRI standard for better color rendering

FEATURE:



ORDERING EXAMPLE : LRLD1419B

LRLD1419	FINISH	COLOR TEMP
LRLD1419	B :Black Reflector/Black White	Blank :3000K (90CRI)
	BB :Black Reflector/Black Ring	-T27 :2700K (90CRI)
	MO :All Mocha	-T35 :3500K (90CRI)
	W :All White	-T40 :4000K (90CRI)

ID#: 3231