


LRLD1420 - 4" ADJUSTABLE SLOT (550LM)

4" LED TRIMS

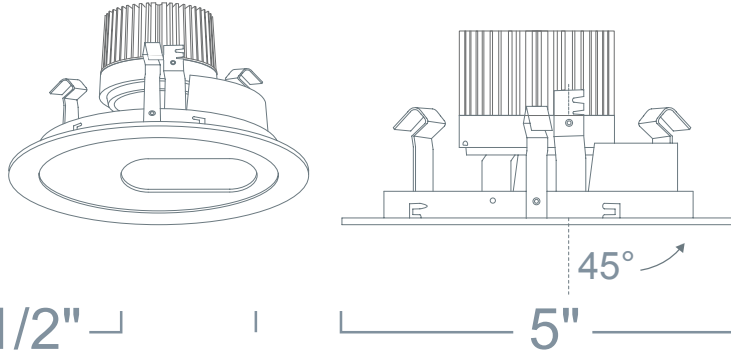

SPECIFICATION

10W LED

Application: These **adjustable** fixtures provide flexibility and versatility by doubling as both a downlight and as an accent light. These trims come with adjustable lamp holders and have larger degrees of rotation resulting in both visual style and practical ergonomics.

Power Connection: LED heat sinked lamp module is replaceable via onboard quick exclusionary disconnect terminal. No tools required. Meets CA Title 24 Requirements and other standards restricting the use of Medium Base or Bi-Pin Sockets.

Lumen Maintenance: Minimum 35,000 hours L70 life based on ANSI TM-21 calculations from LM80 standardized test results.

Thermal Management: Effective thermal dissipation facilitated by integral cast-aluminum, finned heat sink design for maximum heat rejection to provide long LED life.

Warranty: Covered by a 3 Year Warranty to be free of defects in materials and craftsmanship. Recommended for applications where ambient temperatures do not exceed 35°C, installations exceeding this temperature will result in reduced LED lamp life and a voided warranty.

Safety Labels: ETL/cETL listed. Suitable for damp locations only.

Finish: Only available in All White.

Color Temp: Available in 2700K (90CRI), 3000K (90CRI), 3500K (90CRI) and 4000K (90CRI). LEDs binned to within 3-Step MacAdam Ellipses (SDCM) and surpasses the ANSI C78 377A standard for color deviation.



COMPATIBILITY



[LHFRLD49C20](#)

4" FIRE-RATED LED HOUSING(700LM/1000LM)



[LHLD49C20](#)

4" LED HOUSING (700LM/1000LM)



[LHLD49C20](#)

4" LED REMODEL HOUSING(700LM/1000LM)

Note: Wattage limitations on compatible items must be met.

LED Details:

10W 550 + Lumens Delivered
Color Rendering Index (CRI): 90
Color Temperature: 3,000K
Lamp Equivalents: 50W MR16

Benefit:

- Up to 550 Lumens Delivered!
- Budget Friendly, specification quality performance
- Small aperture for hard to light spaces
- Singular diode, no multiple LEDs
- High quality die-cast construction
- 90CRI standard for better color rendering

FEATURE:



ORDERING EXAMPLE : LRLD1420W

LRLD1420	FINISH	COLOR TEMP
LRLD1420	W :All White	Blank :3000K (90CRI)
		-T27 :2700K (90CRI)
		-T35 :3500K (90CRI)
		-T40 :4000K (90CRI)

ID#: 3233