


LRM330W-GU24 - METAL BAFFLE WITH GASKET W/ SOCKET MOUNT

6" COMPACT FLUORESCENT TRIMS - LH276 SERIES

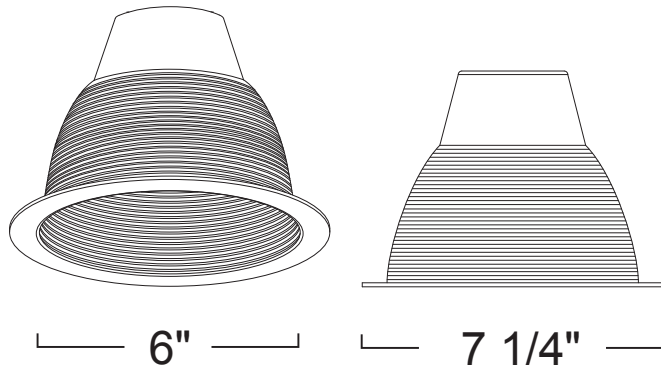

SPECIFICATION

CFL 18W DTT
42W TTT

Application: Baffle downlights are used to minimize unwanted glare from the lamp source while providing a budget friendly design to provide general ambient light to an environment.

While the low reflectance level of black makes it the most effective color for baffle trims, white baffles have become the most popular option. The benefit of white baffles is that the trims blend with the ceiling when the lights are turned off. They are suitable for general illumination of residential and light commercial ceilings up to 9 feet. For a room with a typical eight-foot high ceiling, space 6" downlights apart approximately seven feet apart for general lighting applications.

Mounting: Steel pressure springs mounted on trim to ensure positive retention inside housing.

Caution: Use of any 3rd party lamp source in this unit is subject to the lamp/module manufacturer's own limitations. In no way does LITON make any claims to compatibility in regards to form, fit, usage and case temperature conditions with other manufacturer's products. Users are responsible for confirming compatibility under all aforementioned conditions before using this product.

Finish: Die-formed aluminum baffle ridges eliminate stray light w/ self-flanged ring. Conceals view into housing. Only available in White (Socket Mount).

COMPATIBILITY

 LH71CA-LLF-GU24 NEW CONSTRUCTION HOUSING	 LH276R REMODEL CFL HOUSING (ELECTRONIC)	 LH276IC IC CFL HOUSING 1-LAMP
 LH276RICA REMODEL IC AIRTIGHT CFL HOUSING	 LH71CA-GU24 NEW CONSTRUCTION GU24 HOUSING	

Note: Wattage limitations on compatible items must be met.

FEATURE:



ORDERING EXAMPLE : LRM330W-GU24

LRM330W-GU24

FINISH

LRM330W-GU24 **Blank** :White (Socket Mount)

ID#: 2381