


## LRM40 - METAL BAFFLE 38 6" LINE VOLTAGE TRIMS

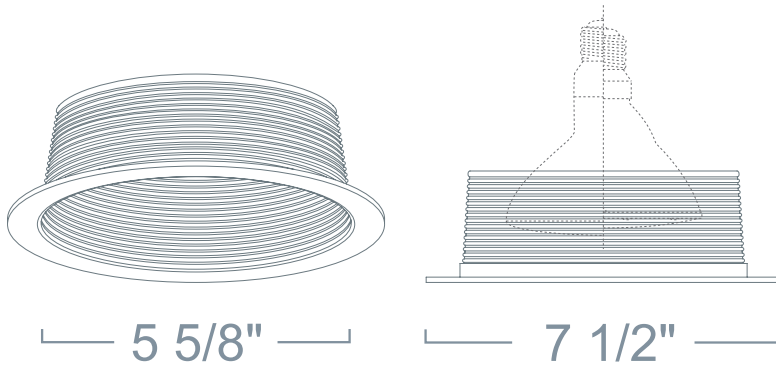

### SPECIFICATION

120V/HID 150W Max R40/PAR38 MED E26

**Application:** Baffle downlights are used to minimize unwanted glare from the lamp source while providing a budget friendly design to provide general ambient light to an environment.

While the low reflectance level of black makes it the most effective color for baffle trims, white baffles have become the most popular option. The benefit of white baffles is that the trims blend with the ceiling when the lights are turned off. They are suitable for general illumination of residential and light commercial ceilings up to 9 feet. For a room with a typical eight-foot high ceiling, space 6" downlights apart approximately seven feet apart for general lighting applications.

**Mounting:** Steel pressure springs mounted on trim to ensure positive retention inside housing.

**Baffle Finish:** Die-formed aluminum baffle ridges eliminate stray light. Available in White, Black, All Natural\*, All Copper\* and All Mocha\*.

**Ring Finish:** Die-Formed Aluminum Trim Ring Available in White, Black, Gold, Natural, Copper and Mocha.

**Label:** UL Listed, cETL Listed

**Limitation:** Not for use w/Shallow Housings.

### COMPATIBILITY

|                                                                                                                                    |                                                                                                                                   |                                                                                                                                    |
|------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------|
| <br><b>LH7</b><br><b>STANDARD E26 HOUSING</b>   | <br><b>LH7IC</b><br><b>100W IC E26 HOUSING</b> | <br><b>LH7MH</b><br><b>STANDARD HID HOUSING</b> |
| <br><b>LH7MHR</b><br><b>REMODEL HID HOUSING</b> | <br><b>LH7R</b><br><b>REMODEL E26 HOUSING</b>  |                                                                                                                                    |

Note: Wattage limitations on compatible items must be met.

### FEATURE:



ORDERING EXAMPLE : LRM40CO

| LRM40 | BAFFLE FINISH          | RING FINISH         |
|-------|------------------------|---------------------|
| LRM40 | <b>W</b> :White        | <b>Blank</b> :White |
|       | <b>B</b> :Black        | <b>B</b> :Black     |
|       | <b>N</b> :All Natural* | <b>G</b> :Gold      |
|       | <b>CO</b> :All Copper* | <b>N</b> :Natural   |
|       | <b>MO</b> :All Mocha*  | <b>CO</b> :Copper   |
|       |                        | <b>MO</b> :Mocha    |

\* Comes standard with a matching ring finish. Use "W" for White Ring.

ID#: 36