
LRM993 - METAL BAFFLE

4" LINE VOLTAGE TRIMS



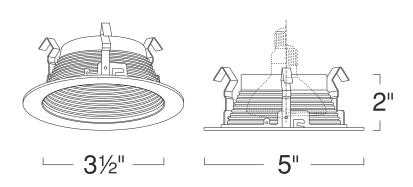

SPECIFICATION

120V/CFL 50W Max R20/PAR20 MED

Application: For accent and task lighting applications. The 4" baffle trim with its clean and durable die-cast construction provides a smooth illumination in short throw distances such

Gasket: Supplied with gasket to prevent light leakage and unsightly heat streaks on ceiling surface.

Mounting: Steel pressure springs mounted on trim to ensure positive retention inside housing.

Baffle Finish: Die-formed aluminum baffle ridges eliminate stray light. Available in White, All Black*, Black, All Natural* and All Copper*.

Label: UL Listed, cETL Listed

COMPATIBILITY

<u>LH99P</u>	<u>LH99IC</u>	<u>LH99PICA</u>
DEEP CFL HOUSING	IC DOUBLE WALL E26 Housing	IC AIRTIGHT CFL Housing
		(\$\frac{1}{2}\) \(\frac{1}{2}\)
<u>LSH99P</u>	LH99R	LSH99PR
SHALLOW CFL Housing	REMODEL E26 Housing	SHALLOW REMODEL CFL Housing
<u>LH99</u>	<u>LH99PR</u>	
STANDARD E26 Housing	DEEP REMODEL CFL Housing	

Note: Wattage limitations on compatible items must be met.

FEATURE:













ORDERING EXAMPLE: LRM993W

LRM993 **BAFFLE FINISH**

LRM993 W :White

:Black :All Black* :All Natural* CO :All Copper*



ID#: 126

^{*} Comes standard with a matching ring finish. Use "W" for White Ring.