


LRSQLD1419 - 4" SQUARE AJUSTABLE TRIM (700LM/1000LM) 4" LED TRIMS

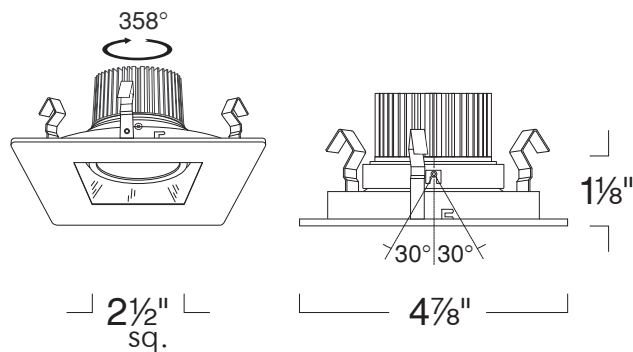

SPECIFICATION

10W/13W LED

Application: Modern Square Aperture Trim is super adjustable and designed for retail, commercial and residential applications. Square trim ring can be rotated 360 degrees after installation.

Gasket: Supplied with gasket to prevent light leakage and unsightly heat streaks on ceiling surface.

Lens Inclusion: Clear glass protective safety lens included in packaging.

Mounting: Steel pressure springs mounted on trim to ensure positive retention inside housing.

Power Connection: LED heat sinked lamp module is replaceable via onboard quick exclusionary disconnect terminal. No tools required. Meets CA Title 24 Requirements and other standards restricting the use of Medium Base or Bi-Pin Sockets.

Lumen Maintenance: Minimum 35,000 hours L70 life based on ANSI TM-21 calculations from LM80 standardized test results.

Thermal Management: Effective thermal dissipation facilitated by integral cast-aluminum, finned heat sink design for maximum heat rejection to provide long LED life.

Warranty: Covered by a 3 Year Warranty to be free of defects in materials and craftsmanship. Recommended for applications where ambient temperatures do not exceed 35°C, installations exceeding this temperature will result in reduced LED lamp life and a voided warranty.

Safety Labels: ETL/cETL listed. Suitable for damp locations only.

Finish: Available in Black Reflector/Black Ring, Black Reflector/White Ring, White Reflector/White Ring, Black Reflector/Chrome Ring and White Reflector/Chrome Ring.

Beam Spread: Available in Narrow Flood, Flood and Wide Flood.

Color Temp: Available in 2700K (90CRI), 3000K (90CRI), 3500K (90CRI) and 4000K (90CRI). LEDs binned to within 3-Step MacAdam Ellipses (SDCM) and surpasses the ANSI C78 377A standard for color deviation.

COMPATIBILITY



LHFRLD49C20

4" FIRE-RATED LED
HOUSING(700LM/1000LM)



LHL49C20

4" LED HOUSING
(700LM/1000LM)



LHL49C20

4" LED REMODEL
HOUSING(700LM/1000LM)

Note: Wattage limitations on compatible items must be met.

LED Details:

10W 700 + Lumens Delivered
Color Rendering Index (CRI): 90
Color Temperature: 3000K
Lamp Equivalents: 50W MR16

13W 1000 + Lumens Delivered
Color Rendering Index (CRI): 90
Color Temperature: 3000K
Lamp Equivalents: 75W MR16

Benefit:

- New 1000lm option!
- Modern 'Square-in-Square' Design
- Super-Adjustable Lamp Holder allows easy repositioning of the beam.
- Square Trim Ring can be rotated 360° after installation
- Square design fits round aperture housing

FEATURE:



ORDERING EXAMPLE : LRSQLD1419BC-B45

LRSQLD1419	FINISH	BEAM SPREAD	COLOR TEMP	LUMENS
LRSQLD1419	BB :Black Reflector/Black Ring	-B45 :Flood	Blank :3000K (90CRI)	Blank :700lm (10W)
	BW :Black Reflector/White Ring	-B60 :Wide Flood	-T27 :2700K (90CRI)	-L10 :1000lm (13W)
	WW :White Reflector/White Ring		-T35 :3500K (90CRI)	
	BC :Black Reflector/Chrome Ring		-T40 :4000K (90CRI)	
	WC :White Reflector/Chrome Ring			

ID#: 3237