



LRX4LH19 - 3.5" 12W LED TRIMLESS PINHOLE LED PHANTOM

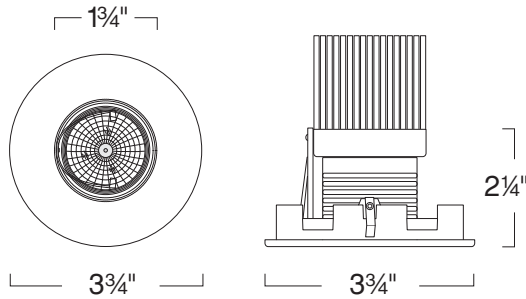

warmdimming
LED WARM DIMMING

12W
ENERGY USED
IN WATTAGE

650
LUMENS

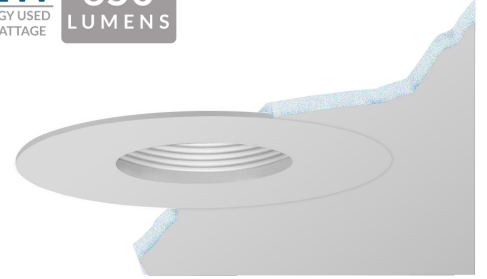

SPECIFICATION

12W Max LED

Applications: Mini-Arc 'Trimless' trims provide a flat, unobstructed 'zero-sight line' view of the ceiling. Trims easily install into a die-cast aluminum adjustment plate that mounts onto the housing. This miniature Pinhole trim is perfect for commercial and high-end residential applications. Its small aperture makes it ideal for strategic placement where tight beam spread control is required.

Lumen Maintenance: Minimum 50,000 hours L70 life based on ANSI TM-21 calculations from LM80 standardized test results.

Thermal Management: Effective thermal dissipation facilitated by integral cast-aluminum, heat sink design for maximum heat rejection to provide long LED life.

Warm Dimming: With this new technology, you can create the warm glow of traditional incandescent dimming while offering extraordinary energy efficiency and service life of LED Lighting. Allow for fixture start at a full 2700K when at full-brightness and smoothly dim down to 5% level with the warm glow of 1850K using dimming option the frame-in kit.

Mounting: Steel pressure springs mounted on trim to ensure positive retention inside housing.

Warranty: Covered by a 5 Year Warranty to be free of defects in materials and craftsmanship. Recommended for applications where ambient temperatures do not exceed 35°C, installations exceeding this temperature will result in reduced LED lamp life and a voided warranty.

Finish: Only available in White.

Beam Spread: Available in 30° Spot, 45° Narrow Flood and 60° Flood.

LED: Available in 3000K, 3000K, 90CRI, 3000K, 97CRI, 1700K*, 2500K*, 2700K, 2700K, 90+ CRI, 2700K, 97CRI, 3500K, 4000K and 1850K-2700K Warm Dimming. LEDs binned to within 3-Step MacAdam Ellipses (SDCM) and surpasses the ANSI C78 377A standard for color deviation.

Label: cETL Listed

COMPATIBILITY



LHXLD4

**3.5" PHANTOM LED
TRIMLESS HOUSING**

Note: Wattage limitations on compatible items must be met.

LED Details:

12W 650 + Lumen Package

Color Rendering Index (CRI): 80

Color Temperature: 3,000K

Lamp Equivalents: 75W A19, 50W PAR20 FL, 50W MR16 FL

Benefit:

- New High Output 12W LED
- LED binned to within 3-Step MacAdam Ellipses (SDCM)
- Specification grade 90CRI Option
- Singular Optic LED
- Illuminates like 50W MR16
- Warm Dimming option (Incandescent-like dimming)

Energy Star Qualified

- LRX4LH19 -T27
- LRX4LH19 -T30
- LRX4LH19 -T40

Title 24/JA8 Compliant

- LRX4LH19 -T27
- LRX4LH19 -T30
- LRX4LH19 -T40

FEATURE:



ORDERING EXAMPLE : LRX4LH19W-T40

LRX4LH19	FINISH	BEAM SPREAD	LED
LRX4LH19	W :White	Blank :45° Narrow Flood	Blank :3000K
		-B30 :30° Spot	-C90 :3000K, 90CRI
		-B60 :60° Flood	-C97 :3000K, 97CRI
			-T17 :1700K*
			-T25 :2500K*
			-T27 :2700K
			-T27-C90 :2700K, 90+ CRI
			-T27-C97 :2700K, 97CRI
			-T35 :3500K
			-T40 :4000K
			-TWD :1850K-2700K Warm Dimming

* Extended Lead Time may apply. Consult Factory.