


LT726 - DIE-CAST MINI GIMBAL W/ EXTENSION LOW VOLTAGE EXTENDED TRACK

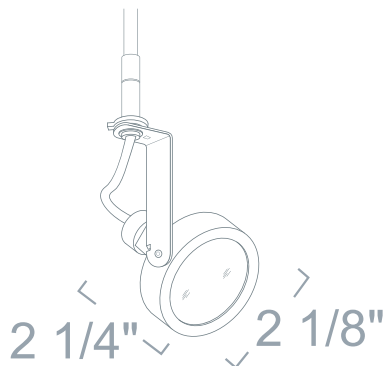

SPECIFICATION

12V 50W MR16 GU5.3

Connector: Comes standard with 3-Wire H-Type thermo-plastic track connections. Fixture is factory preset for installation on single-circuit track. Contacts may be easily adjusted to install on two-circuit track via pull-up tab. J-Type and L-Type connections are available with extended lead times - consult factory.

Transformer: Solid state electronic transformer for voltage reduction and noiseless operation. 120V/60Hz input – 12V output. 50 VA max. load. (Unless specified otherwise) For dimming, use electronic low voltage rated dimming controls. When using dimmer controls, it is recommended to fully power lamps without dimming for 50+ hours to maximize halogen lamp life.

Adjustability: High strength steel L-shape arm with plastic tightening knob to rigidly maintain aiming angle.

Socket: 2-pin porcelain socket with aluminum heat sink plate. Lamp clips to trim to ensure proper and consistent positioning.

Extension: Available in , 12", 48", 36", 18" and 24".

Fixture Finish: Available in White, Black and Natural.

COMPATIBILITY



LP

1 CCT TRACK CHANNEL



LPC

2 CCT TRACK CHANNEL

Note: Wattage limitations on compatible items must be met.

FEATURE:



ORDERING EXAMPLE : LT726W-75

LT726	EXTENSION	OPTION	FIXTURE FINISH	WATTAGE
LT726	Blank :None	Blank :None	W :White	Blank :50W
	-12 :12"	-X :Adjustable Tilt Knuckle	B :Black	-75 :75W
	-18 :18"		N :Natural	
	-24 :24"		CO :Copper	
	-36 :36"			
	-48 :48"			

ID#: 800