


LT747 - PINCH BACK LOW VOLTAGE TRACK

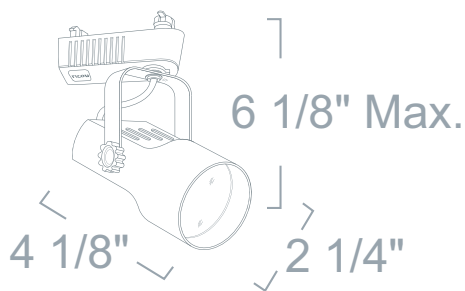

Available in Bright White. Consult factory.

SPECIFICATION

12V 50W MR16 GU5.3

Application: The classic design is a tried-and-true style favorite of low voltage lighting. They are budget friendly and have simple designs that complement any décor. They accept color lenses and optical filters to ensure that the user acquires the desired effect. Made of durable die-cast construction, they are dependable for residential and light commercial applications, for worry free operation for years to come.

Connector: Comes standard with 3-Wire H-Type thermo-plastic track connections. Fixture is factory preset for installation on single-circuit track. Contacts may be easily adjusted to install on two-circuit track via pull-up tab. J-Type and L-Type connections are available with extended lead times - consult factory.

Transformer: Solid state electronic transformer for voltage reduction and noiseless operation. 120V/60Hz input – 12V output. 50 VA max. load. (Unless specified otherwise) For dimming, use electronic low voltage rated dimming controls. When using dimmer controls, it is recommended to fully power lamps without dimming for 50+ hours to maximize halogen lamp life.

Aiming Mechanism: High strength steel yoke with dual plastic tightening knobs to rigidly maintain aiming angle.

Socket: 2-pin porcelain socket with aluminum heat sink plate. Lamp clips to trim to ensure proper and consistent positioning.

Finish: High heat rated baked enamel Available in White and Black. Custom finishes available with extended lead times – consult factory.



COMPATIBILITY



LP

1 CCT TRACK CHANNEL



LPC

2 CCT TRACK CHANNEL

Note: Wattage limitations on compatible items must be met.

FEATURE:



ORDERING EXAMPLE : LT747W

LT747	FINISH	WATTAGE
LT747	W :White	Blank :50W
	B :Black	-75 :75W

ID#: 776