


LT868 - WALL WASH

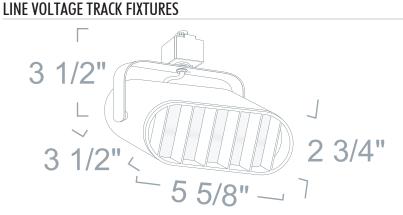

SPECIFICATION

120V 150W T4 DC Bayonet

Application: This traditional style uses a stationary socket and a reflector to create a smooth illumination along the surface of the wall.

Connector: Comes standard with 3-Wire H-Type thermo-plastic track connections. Fixture is factory preset for installation on single-circuit track. Contacts may be easily adjusted to install on two-circuit track via pull-up tab. J-Type and L-Type connections are available with extended lead times - consult factory.

Aiming Mechanism: Durable steel yoke to provide full vertical and horizontal aiming. Internal mechanism rigidly maintains aiming angle.

Socket: Standard porcelain medium screw base socket with high temperature leads.


 $\mbox{\sc Adjustability}$ Lamp can be titled 90° degrees vertically and rotated 358° degrees horizontally.

Finish: High heat rated baked enamel Available in White and Black. Custom finishes available with extended lead times – consult factory.

Label: UL Listed



COMPATIBILITY



Note: Wattage limitations on compatible items must be met.

FEATURE:







Tel: 323.904.0200

ORDERING EXAMPLE: LT868B



