


LTD252163 - 16W 1200 LUMEN SOLO W/ BARNDOORS (SPOTLIGHT OR WALL WASH) (2CCT/2NT) LED TRACK HEAD

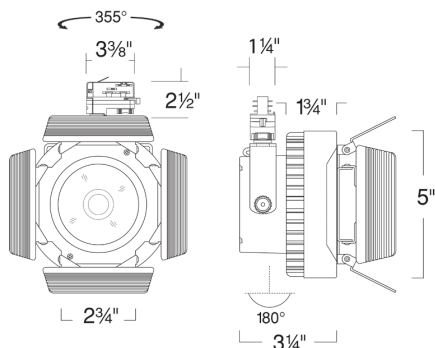

SPECIFICATION

120V 16W LED

Application: The Solo LED track lighting collection features a compact, low-profile design enabling energy efficient lighting designs in retail stores, boutiques and other areas where adjustable illumination is required.

Aiming: Fully adjustable (358/90 degrees) mounting yoke constructed of solid steel. Provides full lateral and vertical aiming. Knurled tightening knobs rigidly maintain vertical aiming angle.

Connector: Factory Installed specification grade 2-circuit 2-Neutral track connector.

Driver: Electronic Direct Current U.L. Listed driver. Comes standard with 120VAC input. Replaceable at End-of-Life.

Dimming: 'DIN' dimming option smoothly dims down to 5% of initial light output with flicker-free performance. Works with standard incandescent dimmers. Factory qualified for use with Lutron brand dimmers: S600PR, DVSCCL-153P & DV600PR as well as Leviton IP106-600W. Works with standard electronic low voltage (ELV) dimmers. Factory qualified for use with Lutron brand dimmers: SELV300P, DVELV-300P, MAELV-600 and NELV-450.

Lumen Maintenance: Minimum 50,000 hours L70 life based on ANSI TM-21 calculations from LM80 standardized test results.

Thermal Management: Effective thermal dissipation facilitated by integral aluminum heat sink for maximum heat rejection to provide long LED life.

Color Temperature: LED Diodes comes standard in Neutral white 3,000K +/- 100K. Also available in 4,000K as special order. Consult factory, extended lead times and minimum order quantities may apply.

Warranty: Covered by a 3 Year Warranty to be free of defects in materials and craftsmanship.

Finish: Available in All Black, Bright White and Natural/Satin.

Beam Spread: Available in Narrow Flood, Flood and Wide Flood.

Color Temperature: Available in 3000K (90CRI), 3500K (90CRI) and 4000K (80CRI)*.

Label: cETL Listed

Assembled in USA

COMPATIBILITY



LP20

SURFACE TRACK



LP20

RECESSED TRACK

Note: Wattage limitations on compatible items must be met.

LED Details:

16W 1200 + Lumens Delivered

Color Rendering Index (CRI): 90

Color Temperature: 2,900K

Lamp Equivalents: 75W MR16, 90W PAR30, PAR38, 100W A19

Benefit:

- Beamspread options are perfect for spotlight or wall wash applications.
- Incandescent/ELV Dimming option
- Highly adjustable, 358° Rotation/0°-90° Gimbal
- Knurled locking knobs insure firm positioning
- Adjustable barn doors shield the beam and lend a theatrical feel.

FEATURE:



ORDERING EXAMPLE : LTD252163BB-B25

LTD252163	FINISH	BEAM SPREAD	DIMMING	COLOR TEMPERATURE
LTD252163	BB :All Black	-B25 :Narrow Flood	Blank :None	Blank :3000K (90CRI)
	WW :Bright White	-B45 :Flood	-DIN :Dimming	-T35 :3500K (90CRI)
	SN :Natural/Satin	-B60 :Wide Flood		-T40 :4000K (80CRI)*

* 4000K has longer Lead Times for quantities over 50.

ID#: 3122



Tel: 323.904.0200

Product specifications subject to change without notice.

www.liton.com

