



LTDP310 : 2" CYLO CYLINDER

LED PENDANT HEAD 800LM (10W)

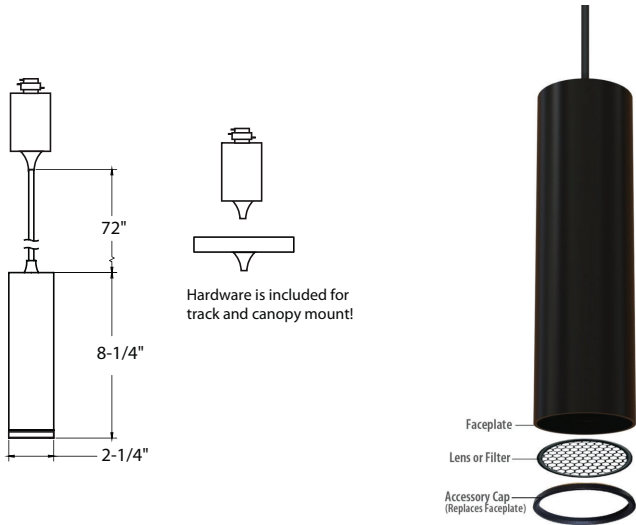

- Standard 90 CRI
- Sleek Unobtrusive Design
- Concealed heat sink and LED driver
- For use with standard H-Style 1-circuit and 2-circuit track or canopy mount
- Precision design ensures firm positioning
- "Zero Percent Dimmin Standard" Smoothly Dims to completely off with Standard Incandescent Dimmers
- Hardware is included for track and canopy mount!

ORDERING : LTDP310B-TS354-LVR

Fixture	Finish	Dimming	Beam Spread	Color Temperature	Accessories	Wiring Options	
2" Cylo Cylinder	LTDP310	120V 2-Wire/ Incandescent/ ELV Dimming	Blank	3000K (90 CRI)	Blank	None	Blank
				2700K (90 CRI)	-T27	Louver	-LVR
				3500K (90 CRI)	-TS35	Red Lens	/L39
				4000K (90 CRI)	-TS40	Yellow Lens	/L40
				ColorSelect	-TS354	Blue Lens	/L41
				3000K/3500K/4000K (90 CRI)		Amber Lens	/L42
						Green Lens	/L43
						Lens with Internal Louver Filter	/L48
						Micro-Prismatic Spread Lens	/L53
						Snoot	-SNT
						Glow Ring	-GLOW
						Barn Door	-BD

Beam Spread	Color Temperature	Accessories	Wiring Options	
45° Flood	Blank		None	Blank
15° Spot	-B15		Pre-wired w/ Track Adapter	-TRK
25° Narrow Flood	-B25			

COMPATIBLE ITEMS



SPECIFICATION

Application

Architecturally styled LED Cylo 2" Cylinder Pendant features a durable steel body, futuristic alloy heat sink, hidden wiring and internal adjustment mechanism for a clean unobtrusive look. It's small size makes it ideal for retail, commercial and residential applications requiring stylish design and true MR16 performance.

Connector

LITON track fixtures come standard with 3-Wire H-Type track connections. Fixture is factory preset for installation on single-circuit track. J-Type and L-Type connections are available with extended lead times - consult factory. Field adjustable cord to 72".

Mounting

Comes with connector hardware to mount to cct/1nt track and 2cct/1nt H-Type Track as well as hardware to mount fixture to a canopy mount. Electrical Assembly required with (Blank) option. For prewired, order (-TRK) option.

Driver

Electronic Constant Current driver integrally mounted in fixture casing.

Dimming

Works with standard incandescent dimmers and ELV Dimmers. Factory qualified for use with Luton brand dimmers: S600PR, DVSCCL-153P & DV600PR as well as Leviton IP106-600W.

Lumen Maintenance

Minimum 35,000 hours L70 life based on ANSI TM-21 calculations from LM80 standardized test results.

Thermal Management

Effective thermal dissipation facilitated by integral aluminum heat sink for maximum heat rejection to provide long LED life.

Safety Labels

ETL/CETL listed. Suitable for dry locations only. UL listed.

Warranty

Effective thermal dissipation facilitated by integral aluminum heat sink for maximum heat rejection to provide long LED life.

Accessories

Black Hexcell Louver (LVR), Red Lens (L39), Yellow Lens (L40), Blue Lens (L41), Amber Lens (L42), Green Lens (L43), Lens with Internal Louver Filter (L48), Micro-Prismatic Spread Lens (L53), Glow Ring (-GLOW), Snoot (SNT), and Barn Door (-BD). Accessories ship with Accessories Cap which replaces threaded Lens Cap.